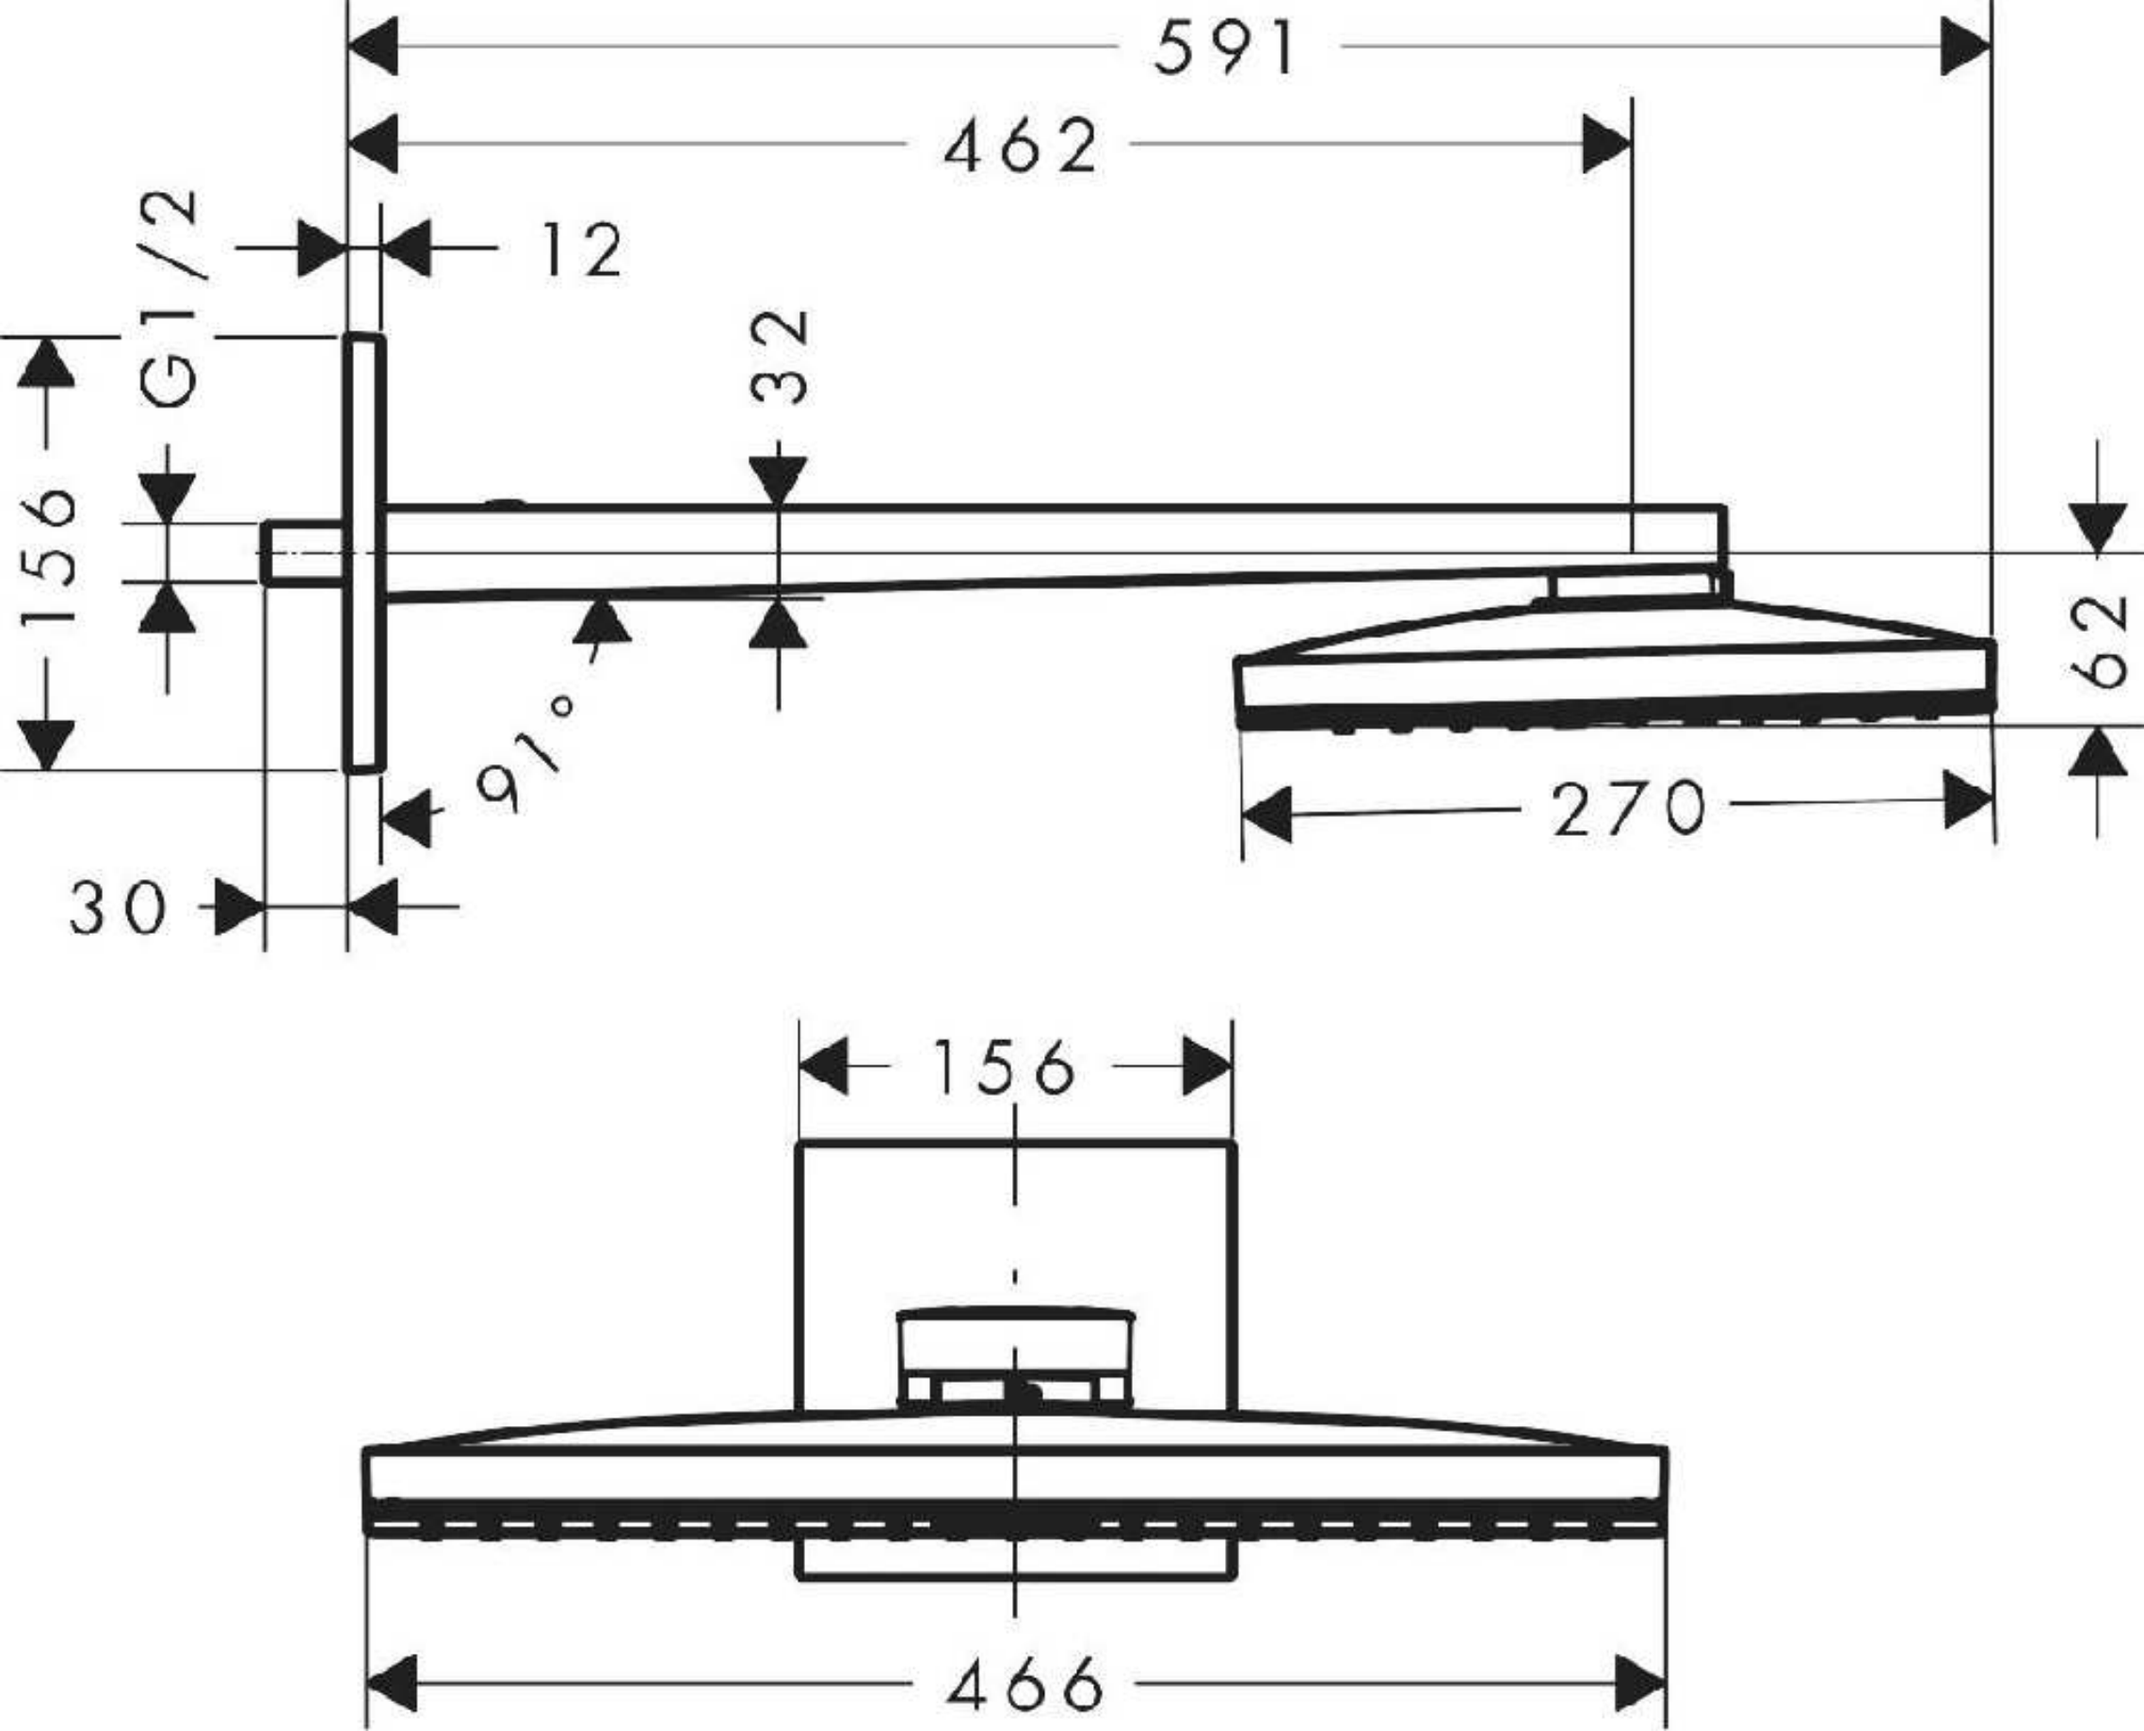
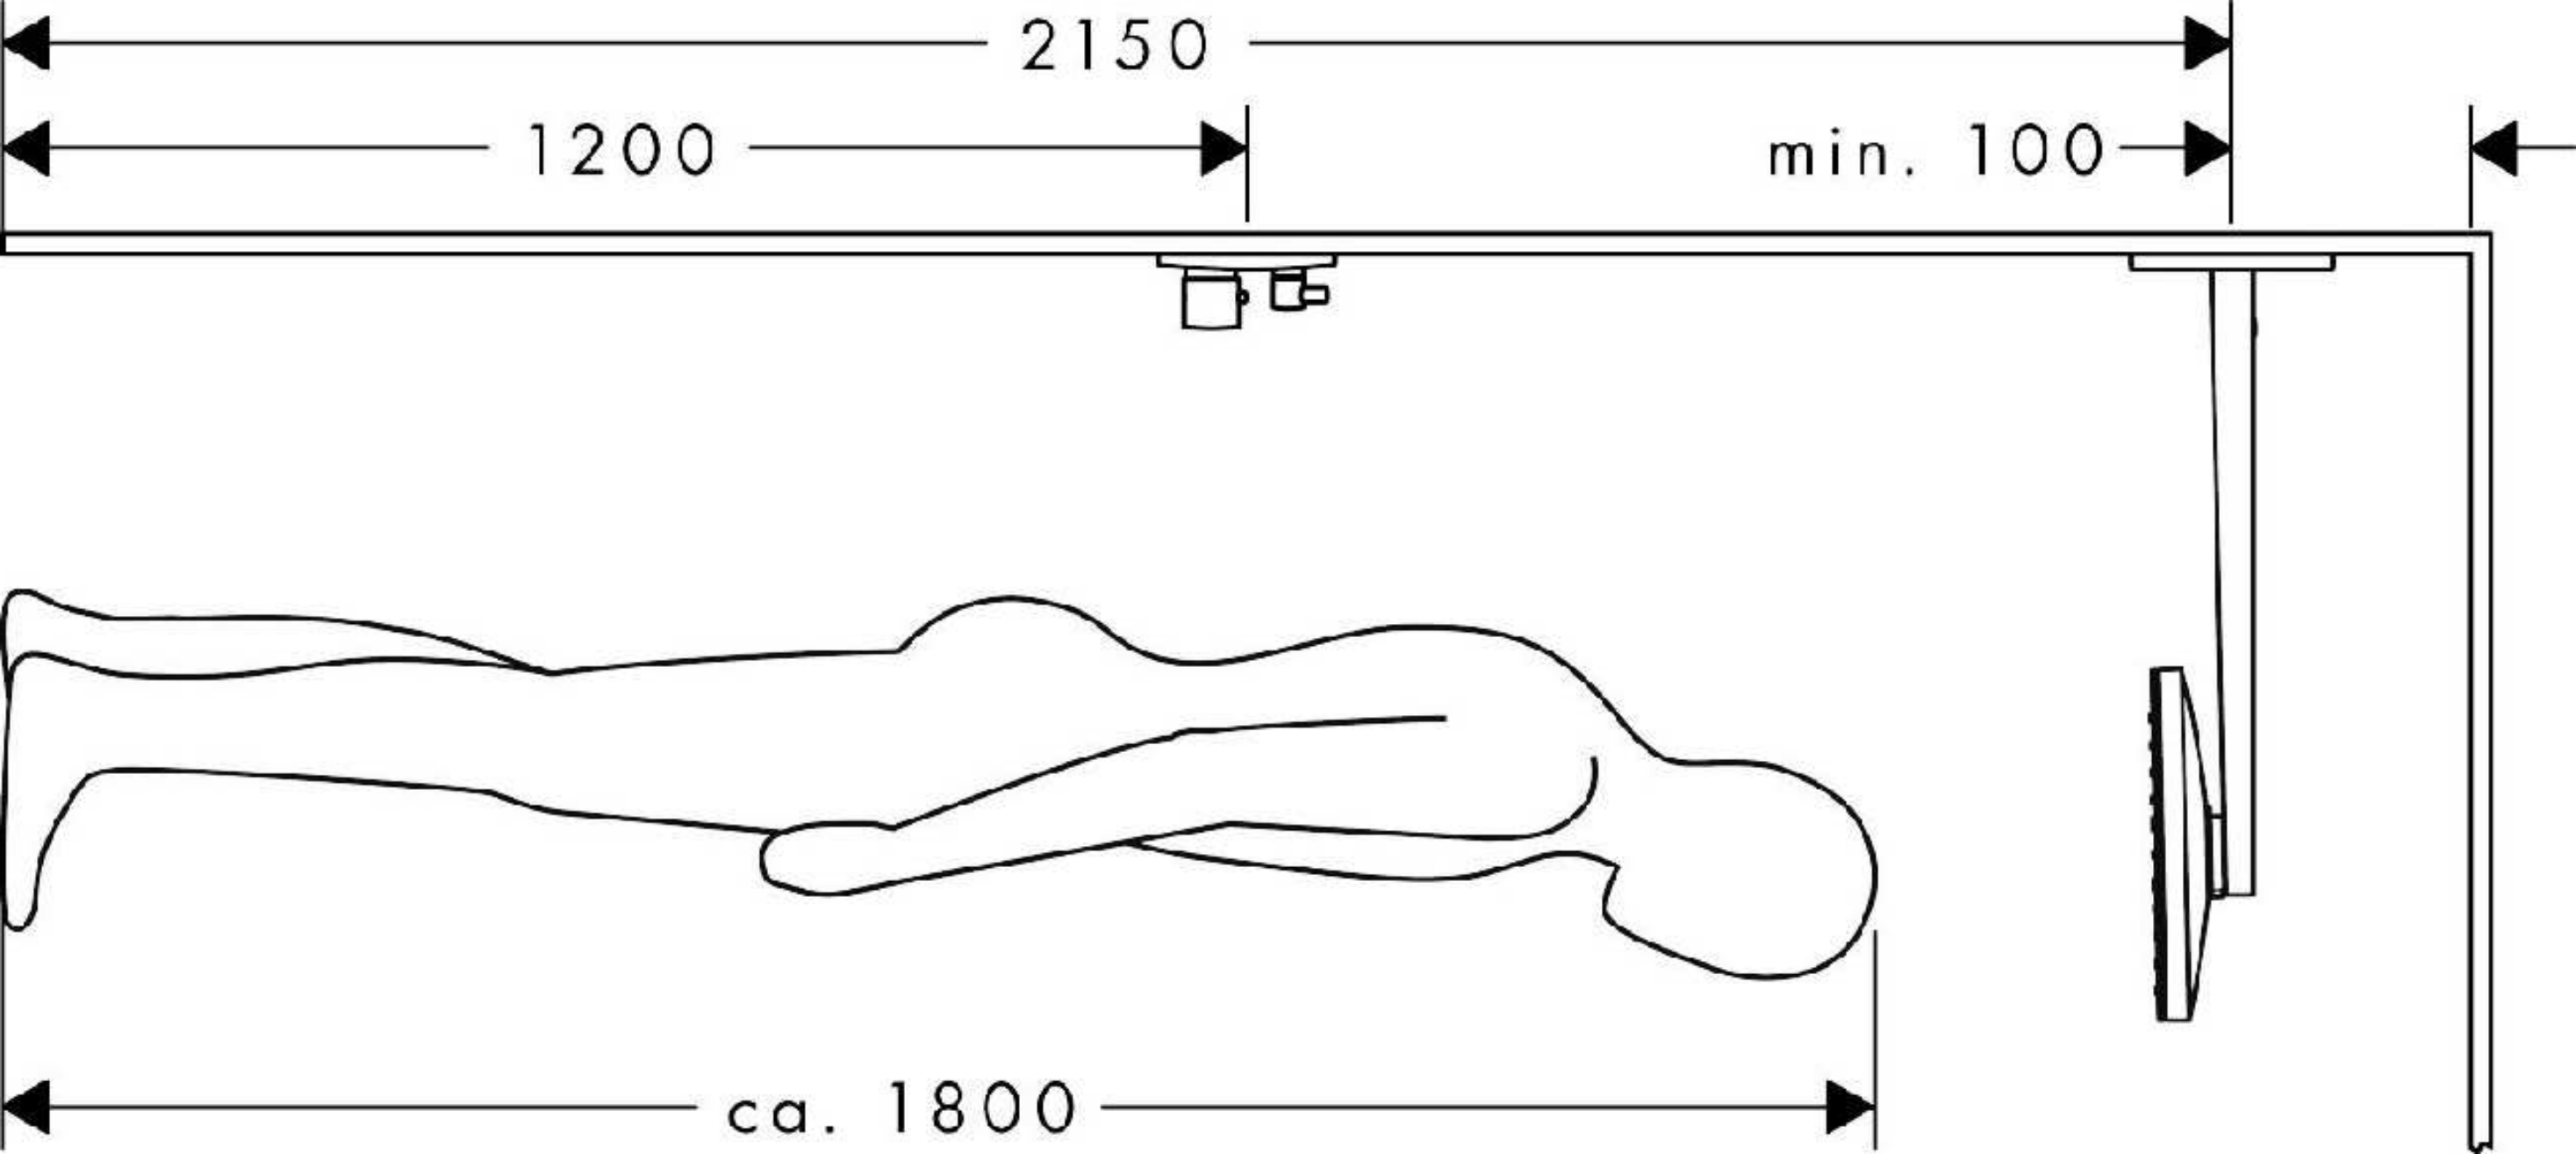
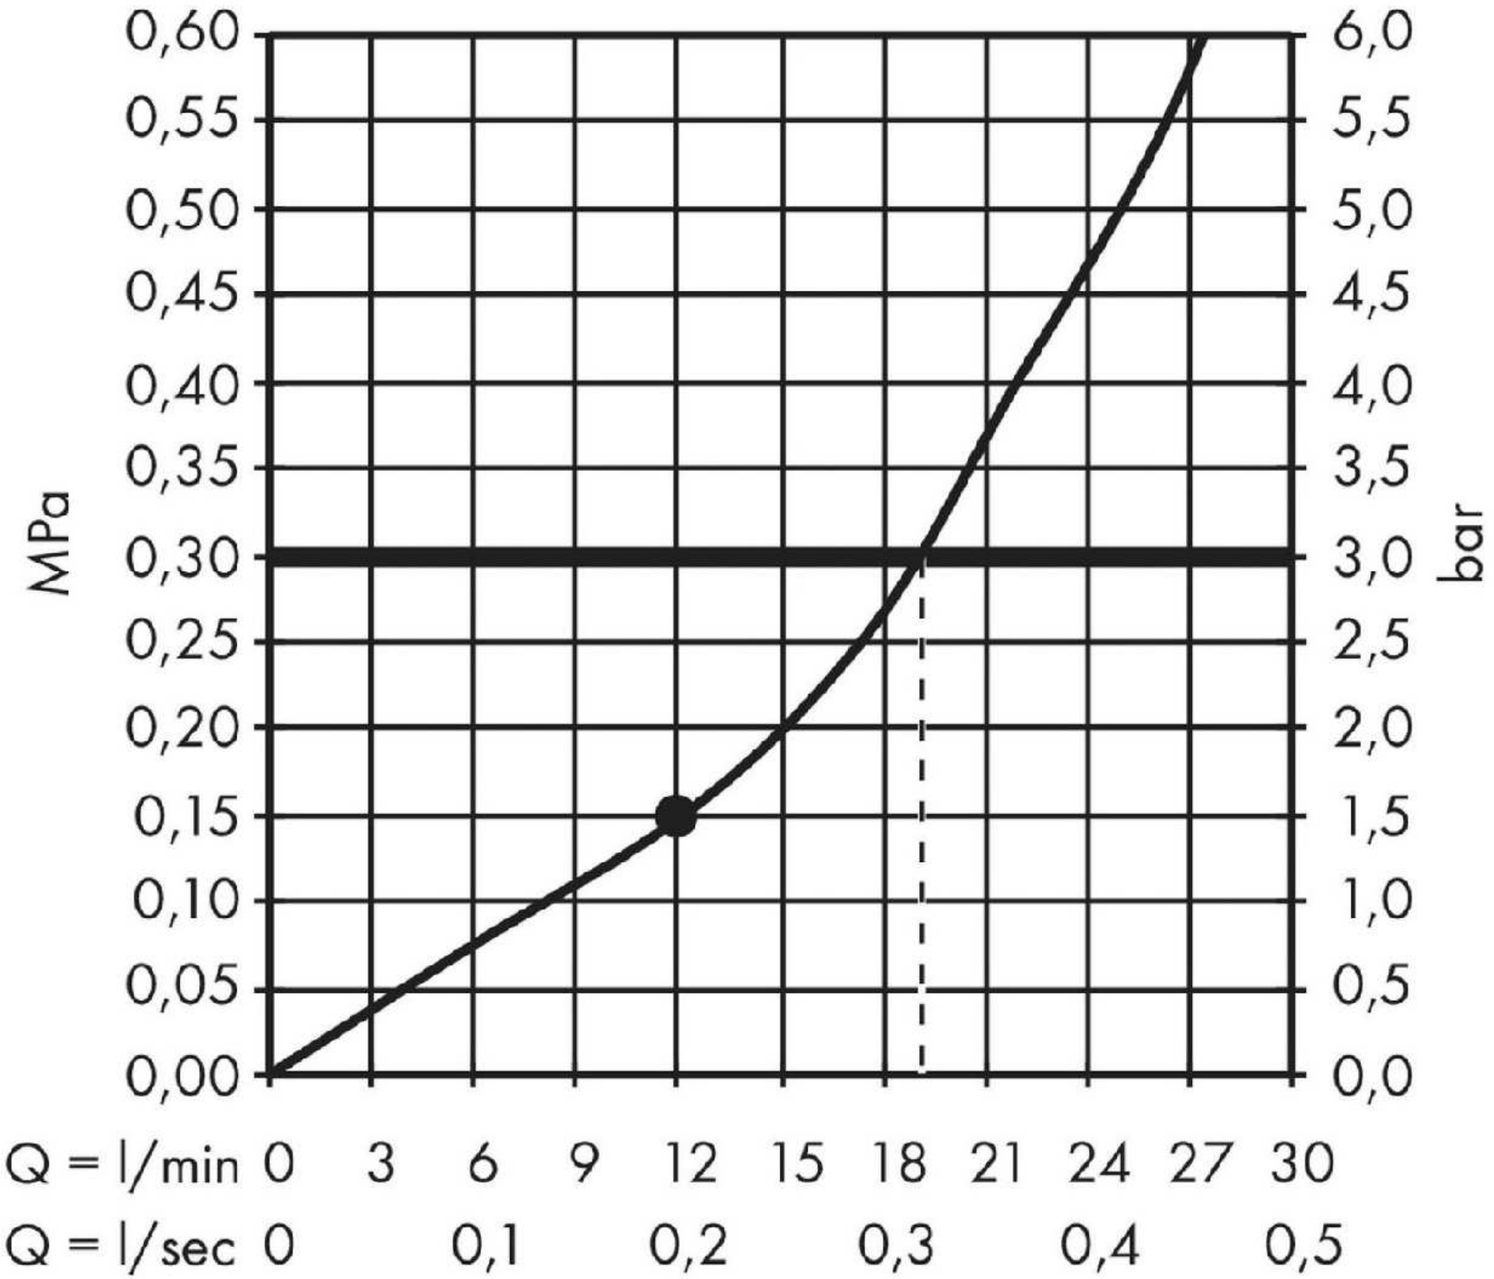

591
462
12
G1/2
32
156
62
91°
270
30
156
466


2150
1200
min. 100
ca. 1800



The consumption was measured in combination with the appropriate fittings (thermostat/mixer/ in-wall valve) to reflect actual application in practice.