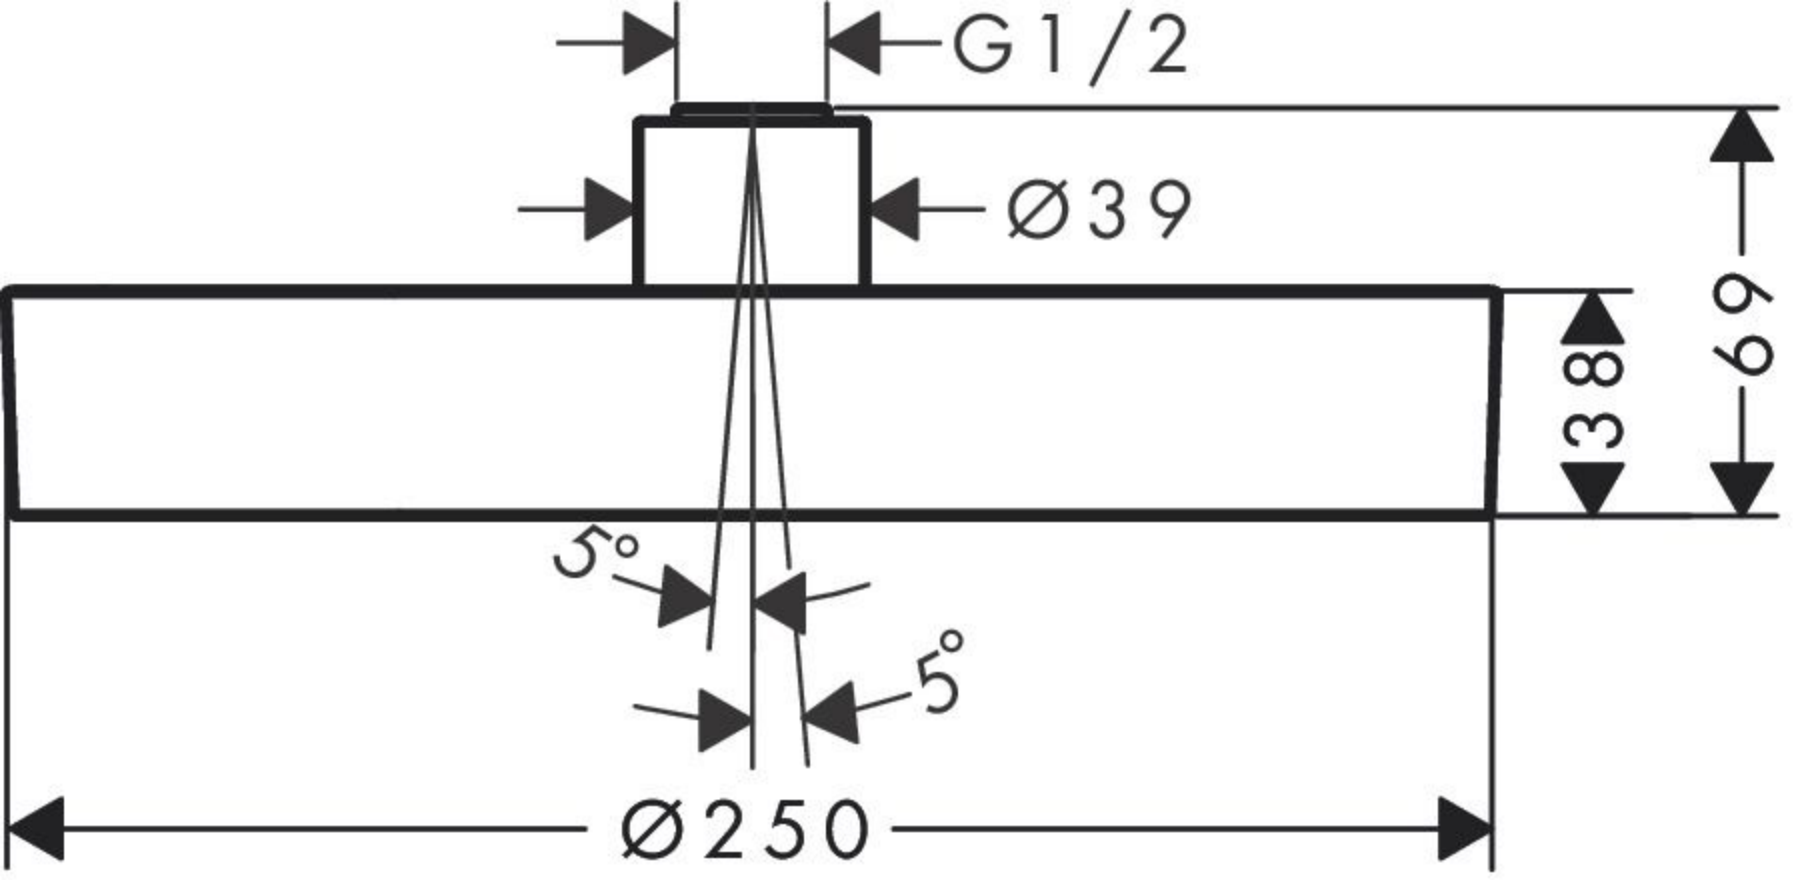
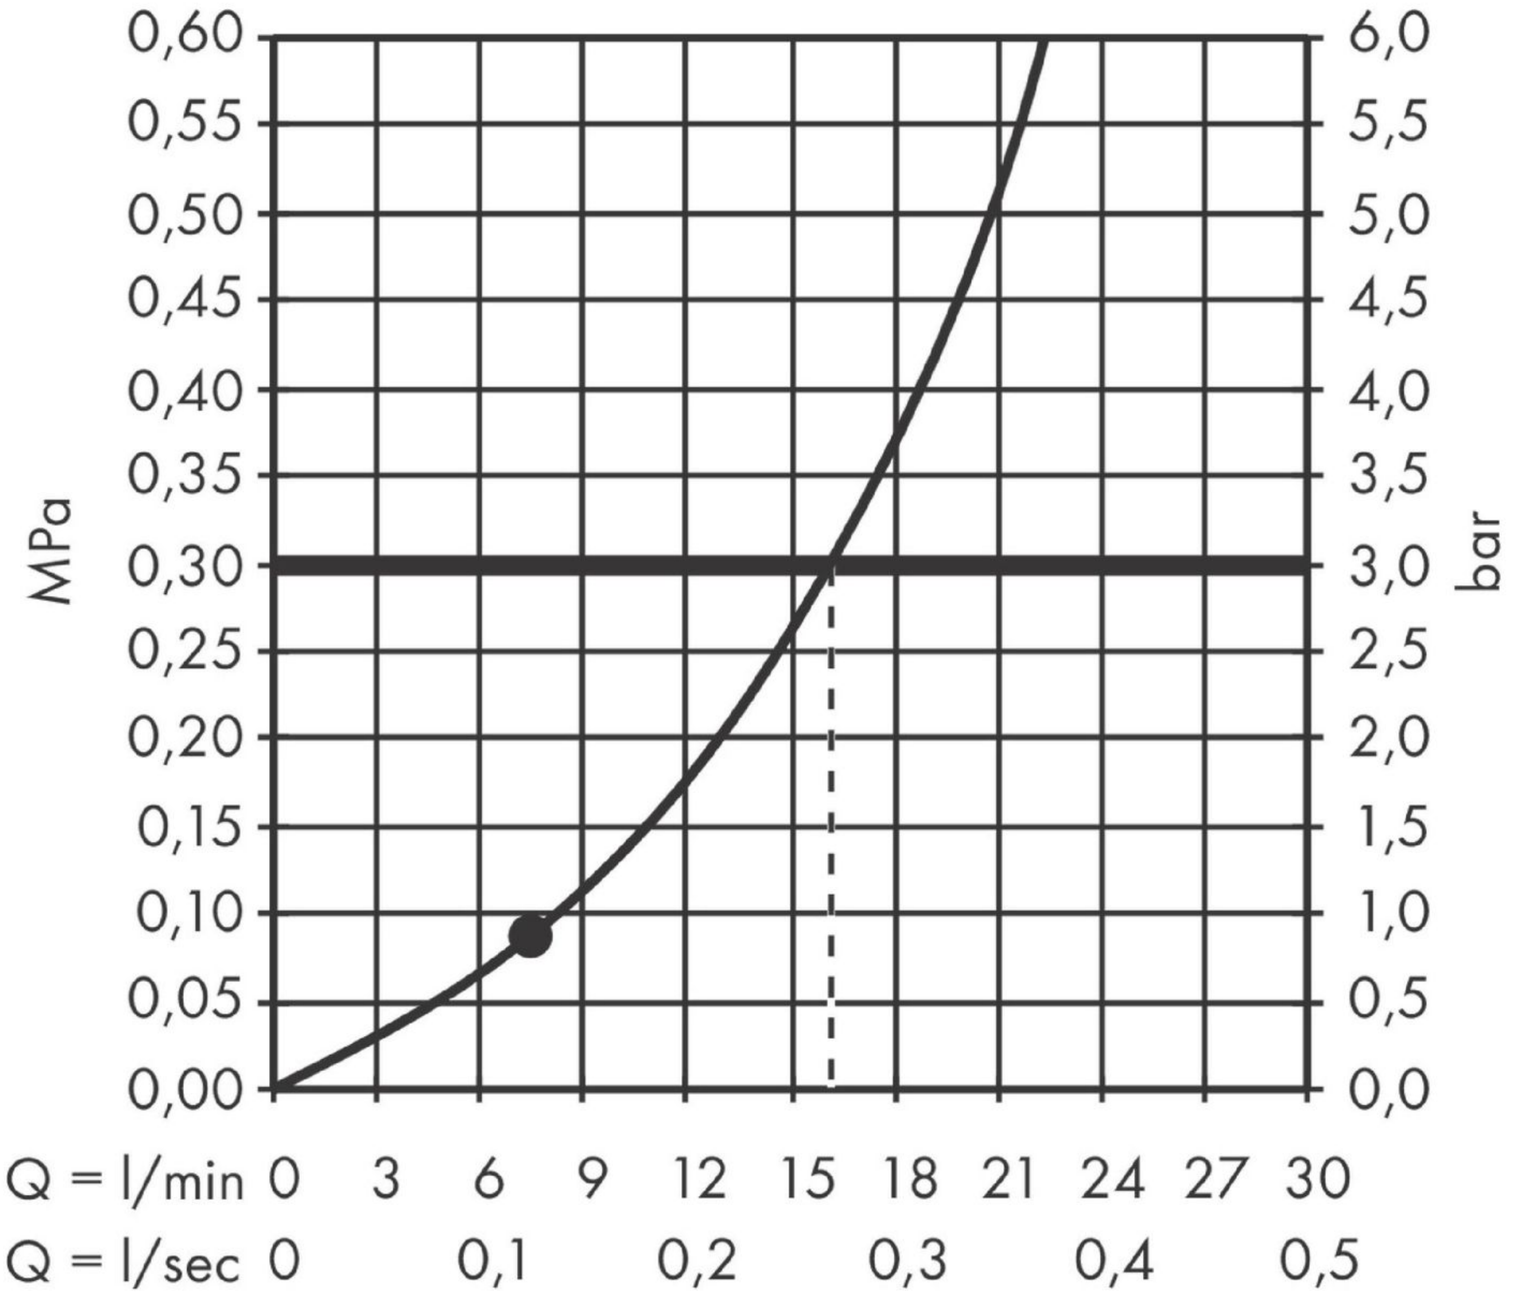

G 1/2
Ø39
69
38
5°
5°
Ø250



The consumption was measured in combination with the appropriate fittings (thermostat/mixer/ in-wall valve) to reflect actual application in practice.