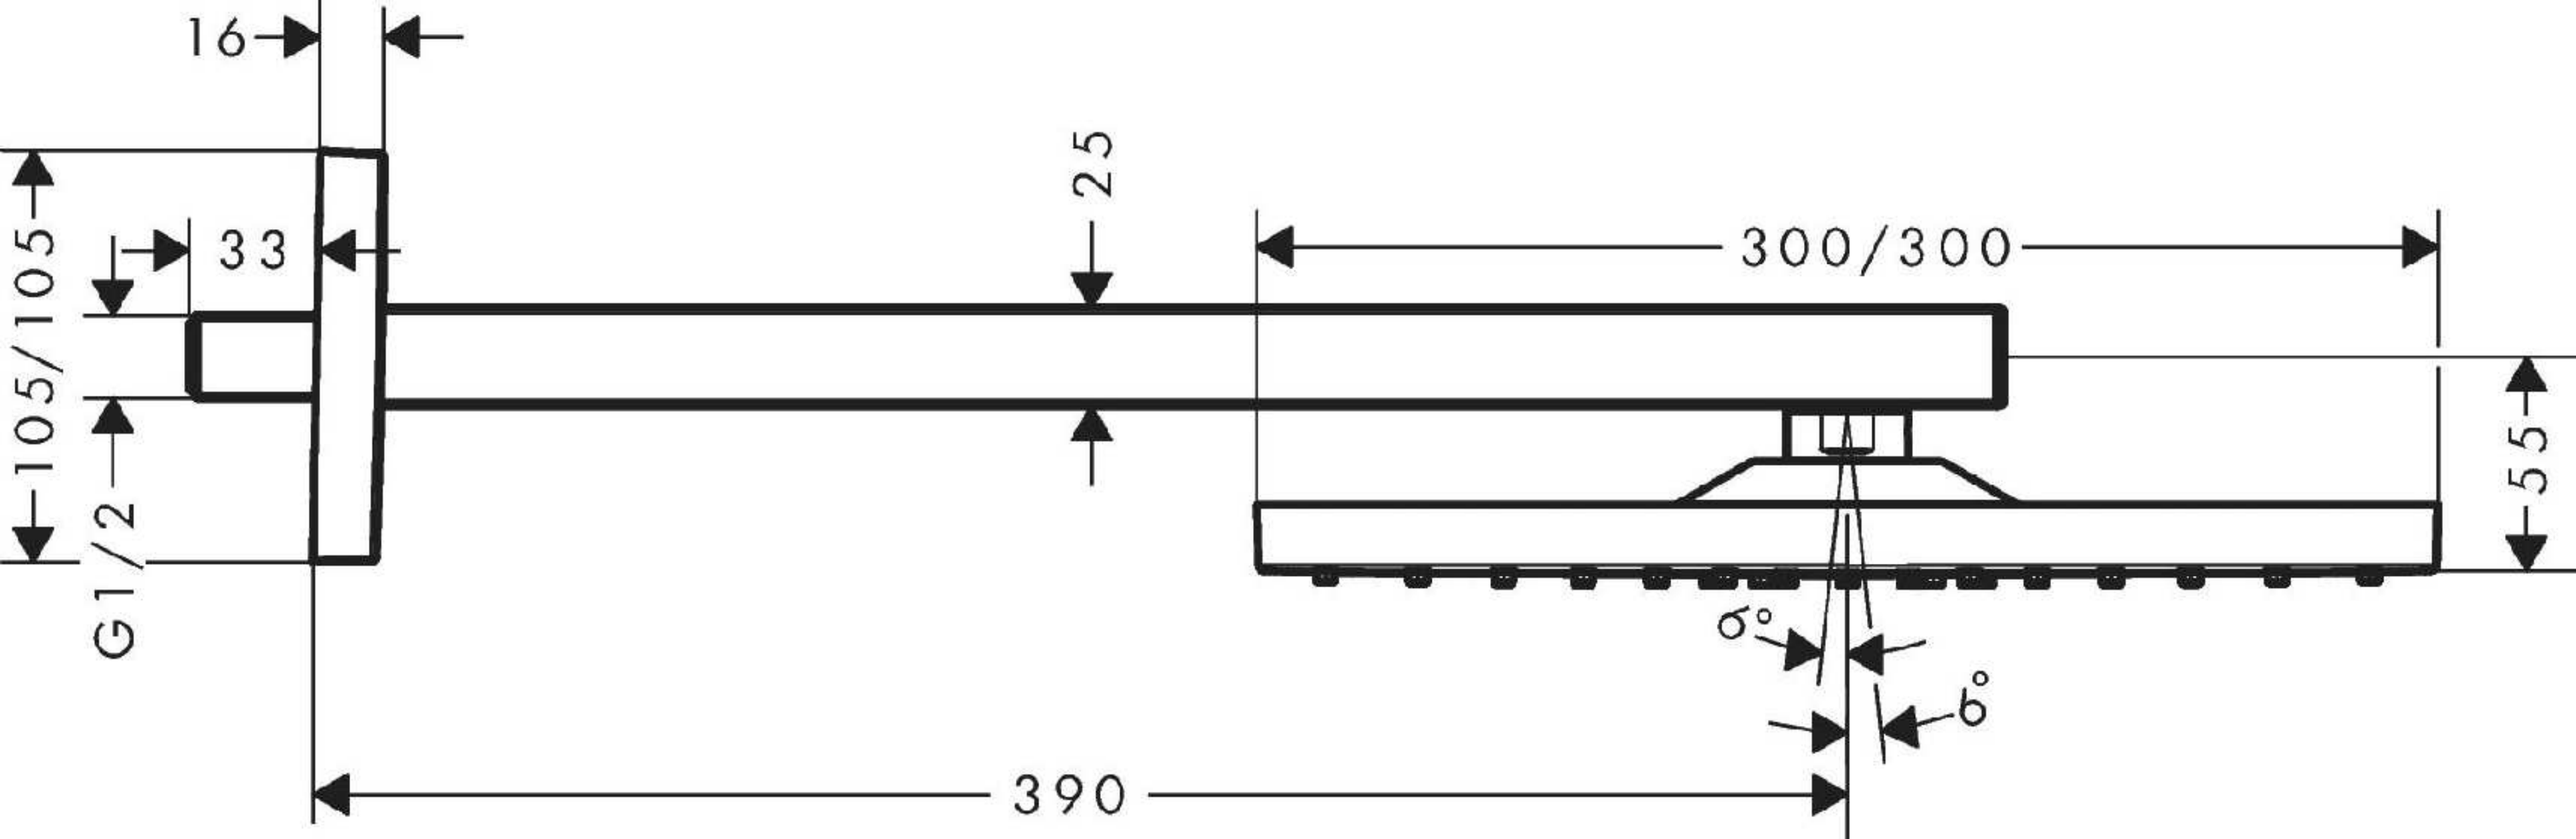
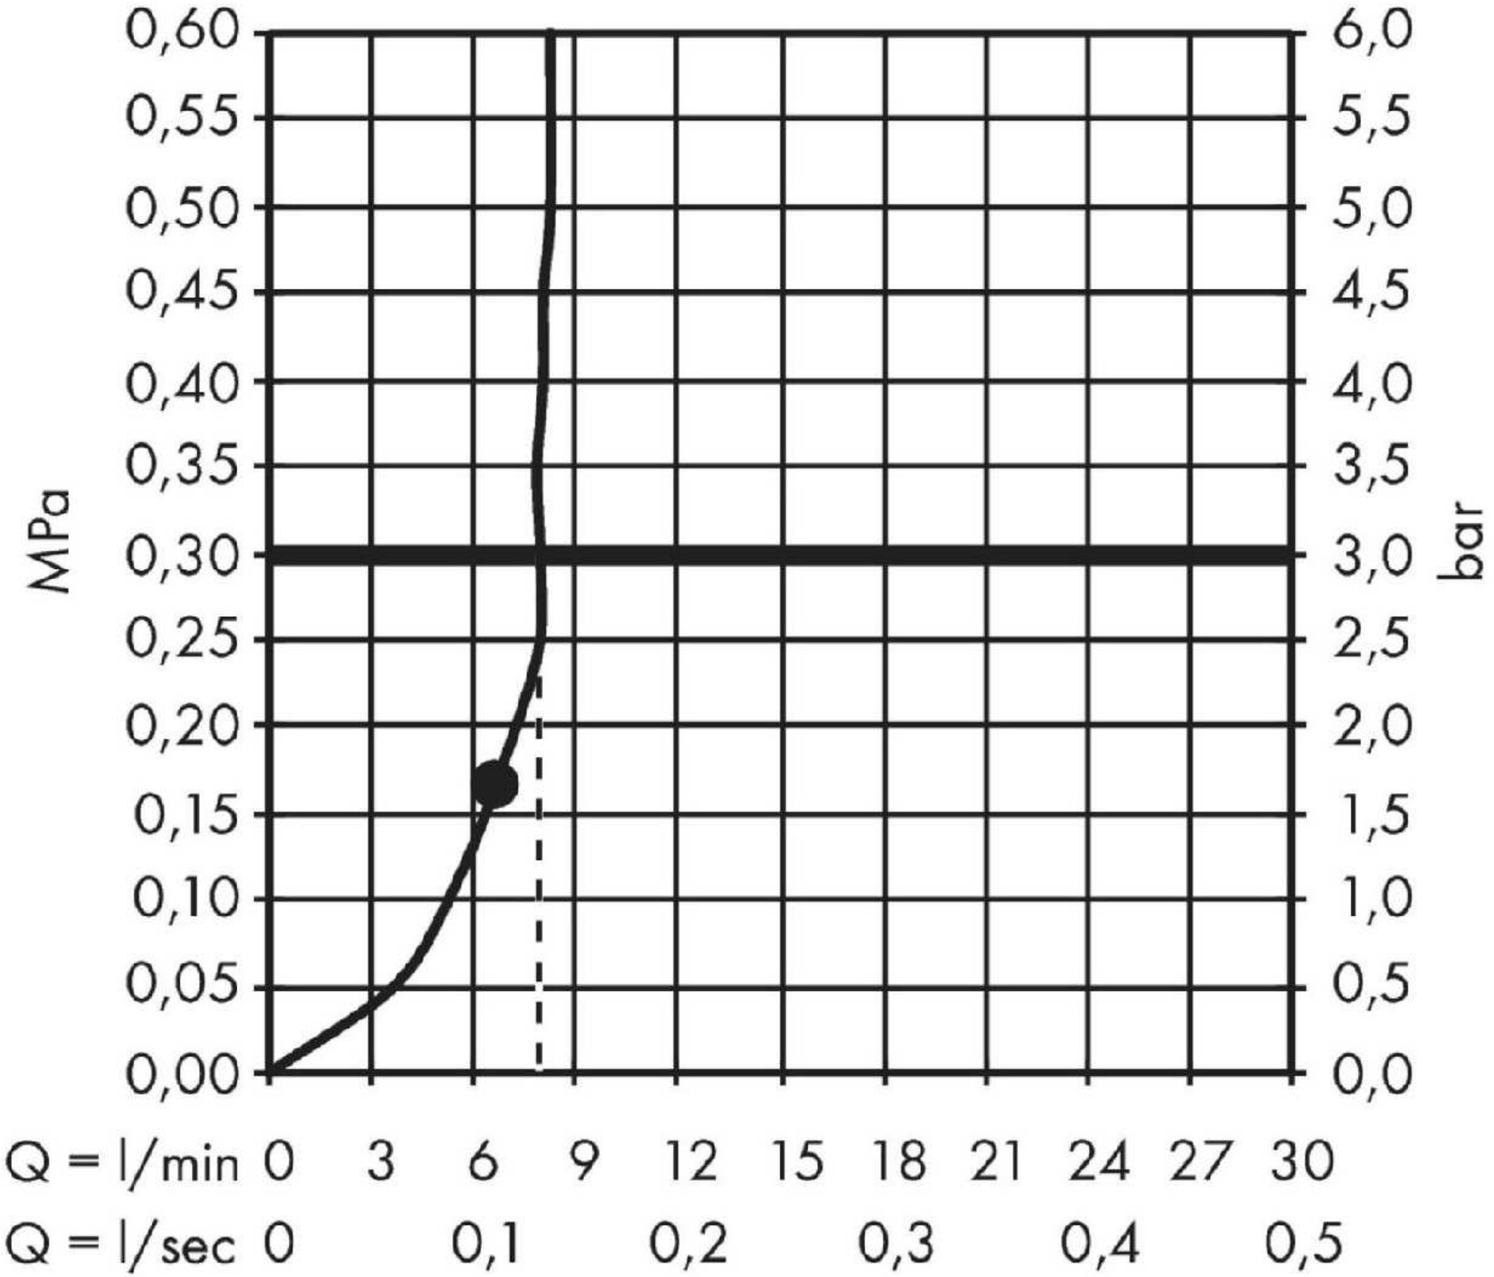

16
25
33
300/300
105/105
G1/2
55
6°
6°
390




The consumption was measured in combination with the appropriate fittings (thermostat/mixer/ in-wall valve) to reflect actual application in practice.