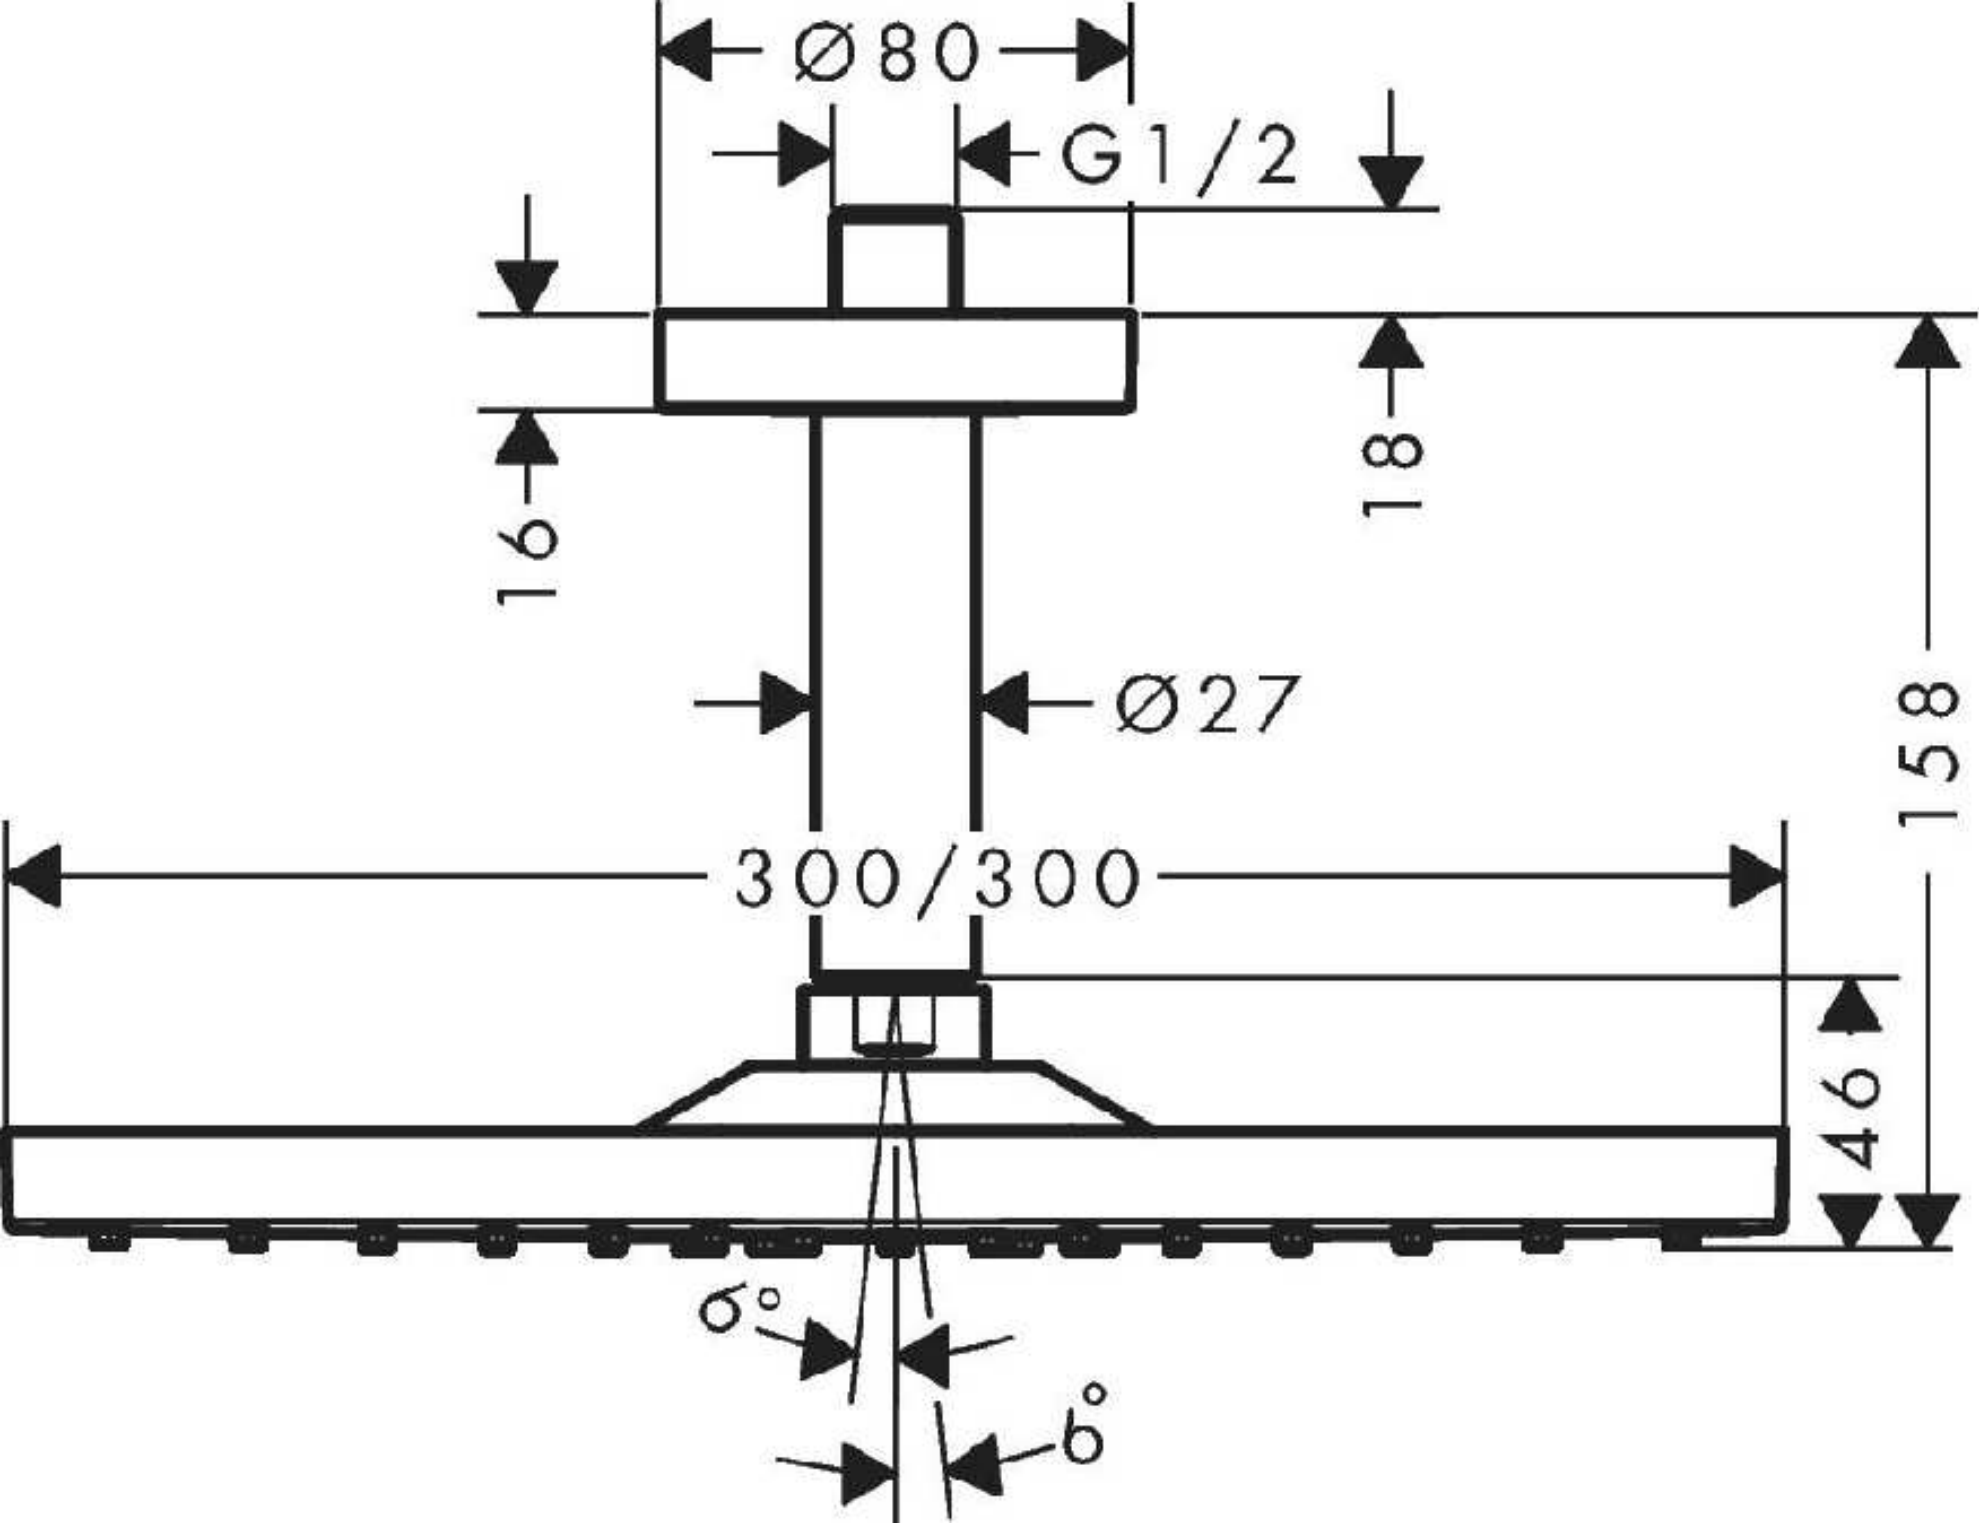
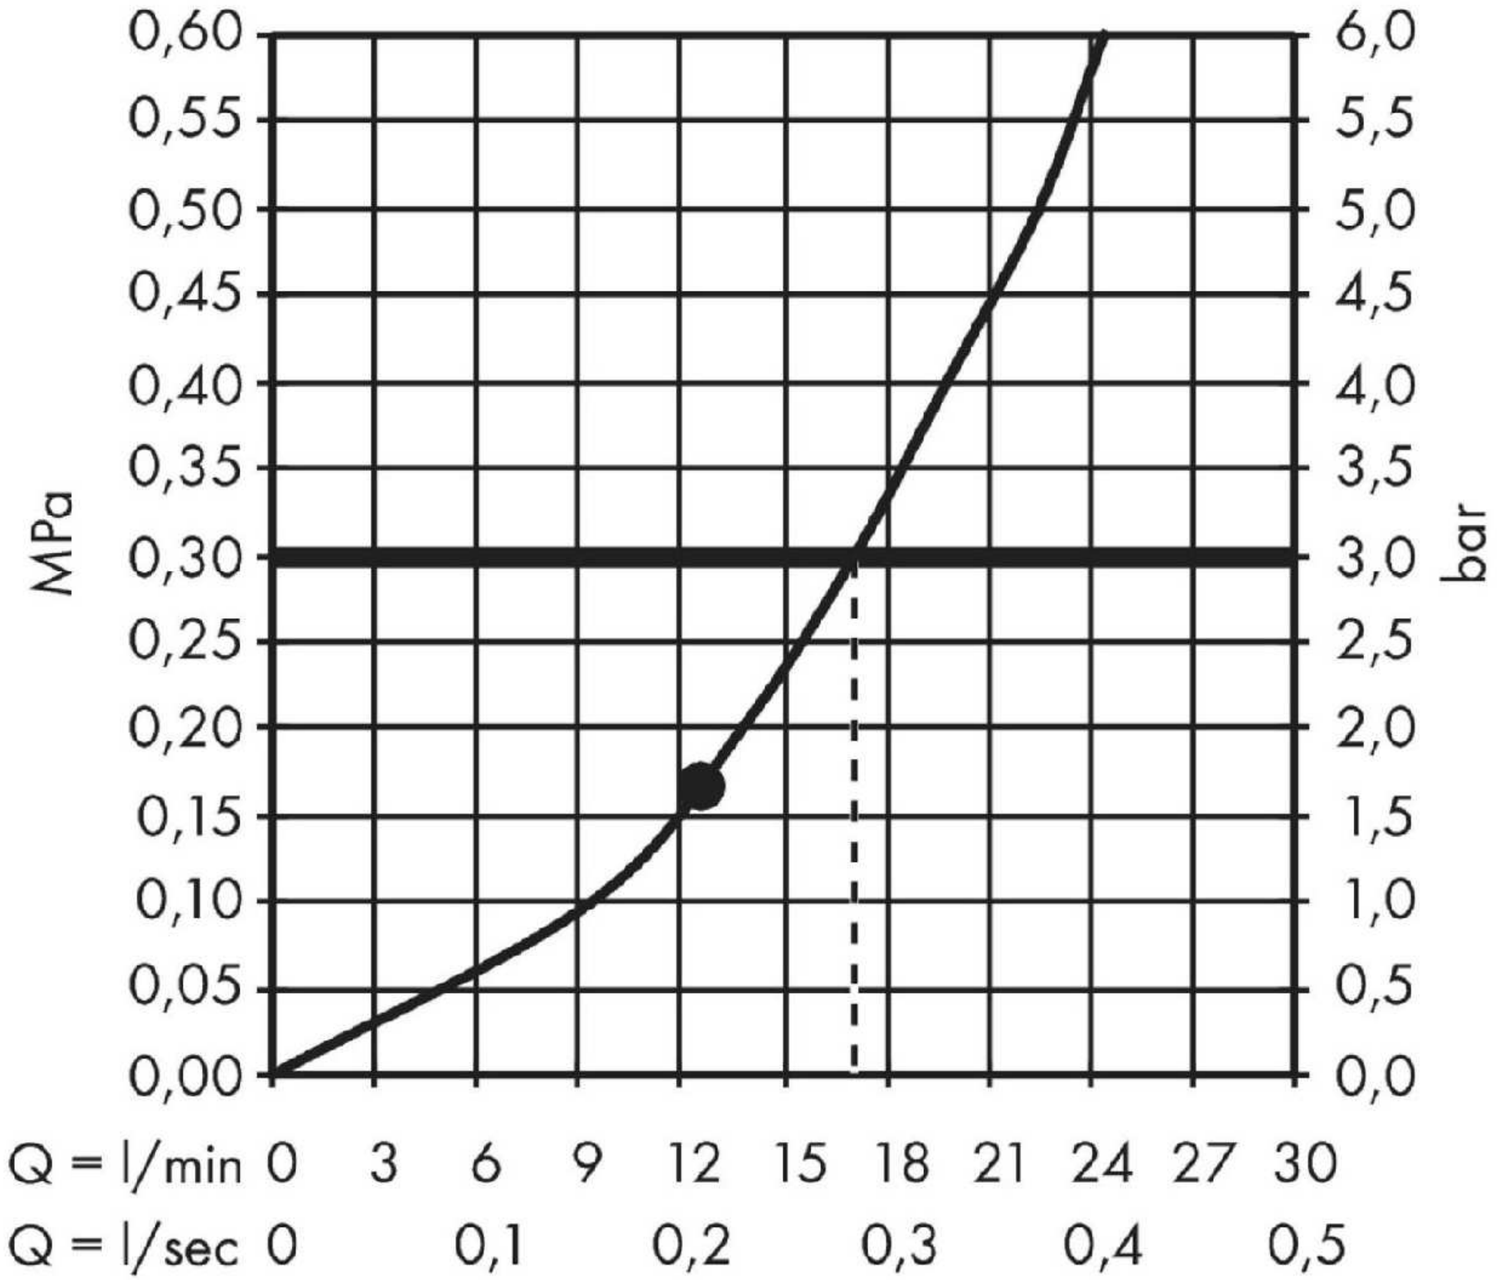

Ø80
G1/2
16
18
Ø27
158
300/300
46
δ°
δ°



The consumption was measured in combination with the appropriate fittings (thermostat/mixer/ in-wall valve) to reflect actual application in practice.