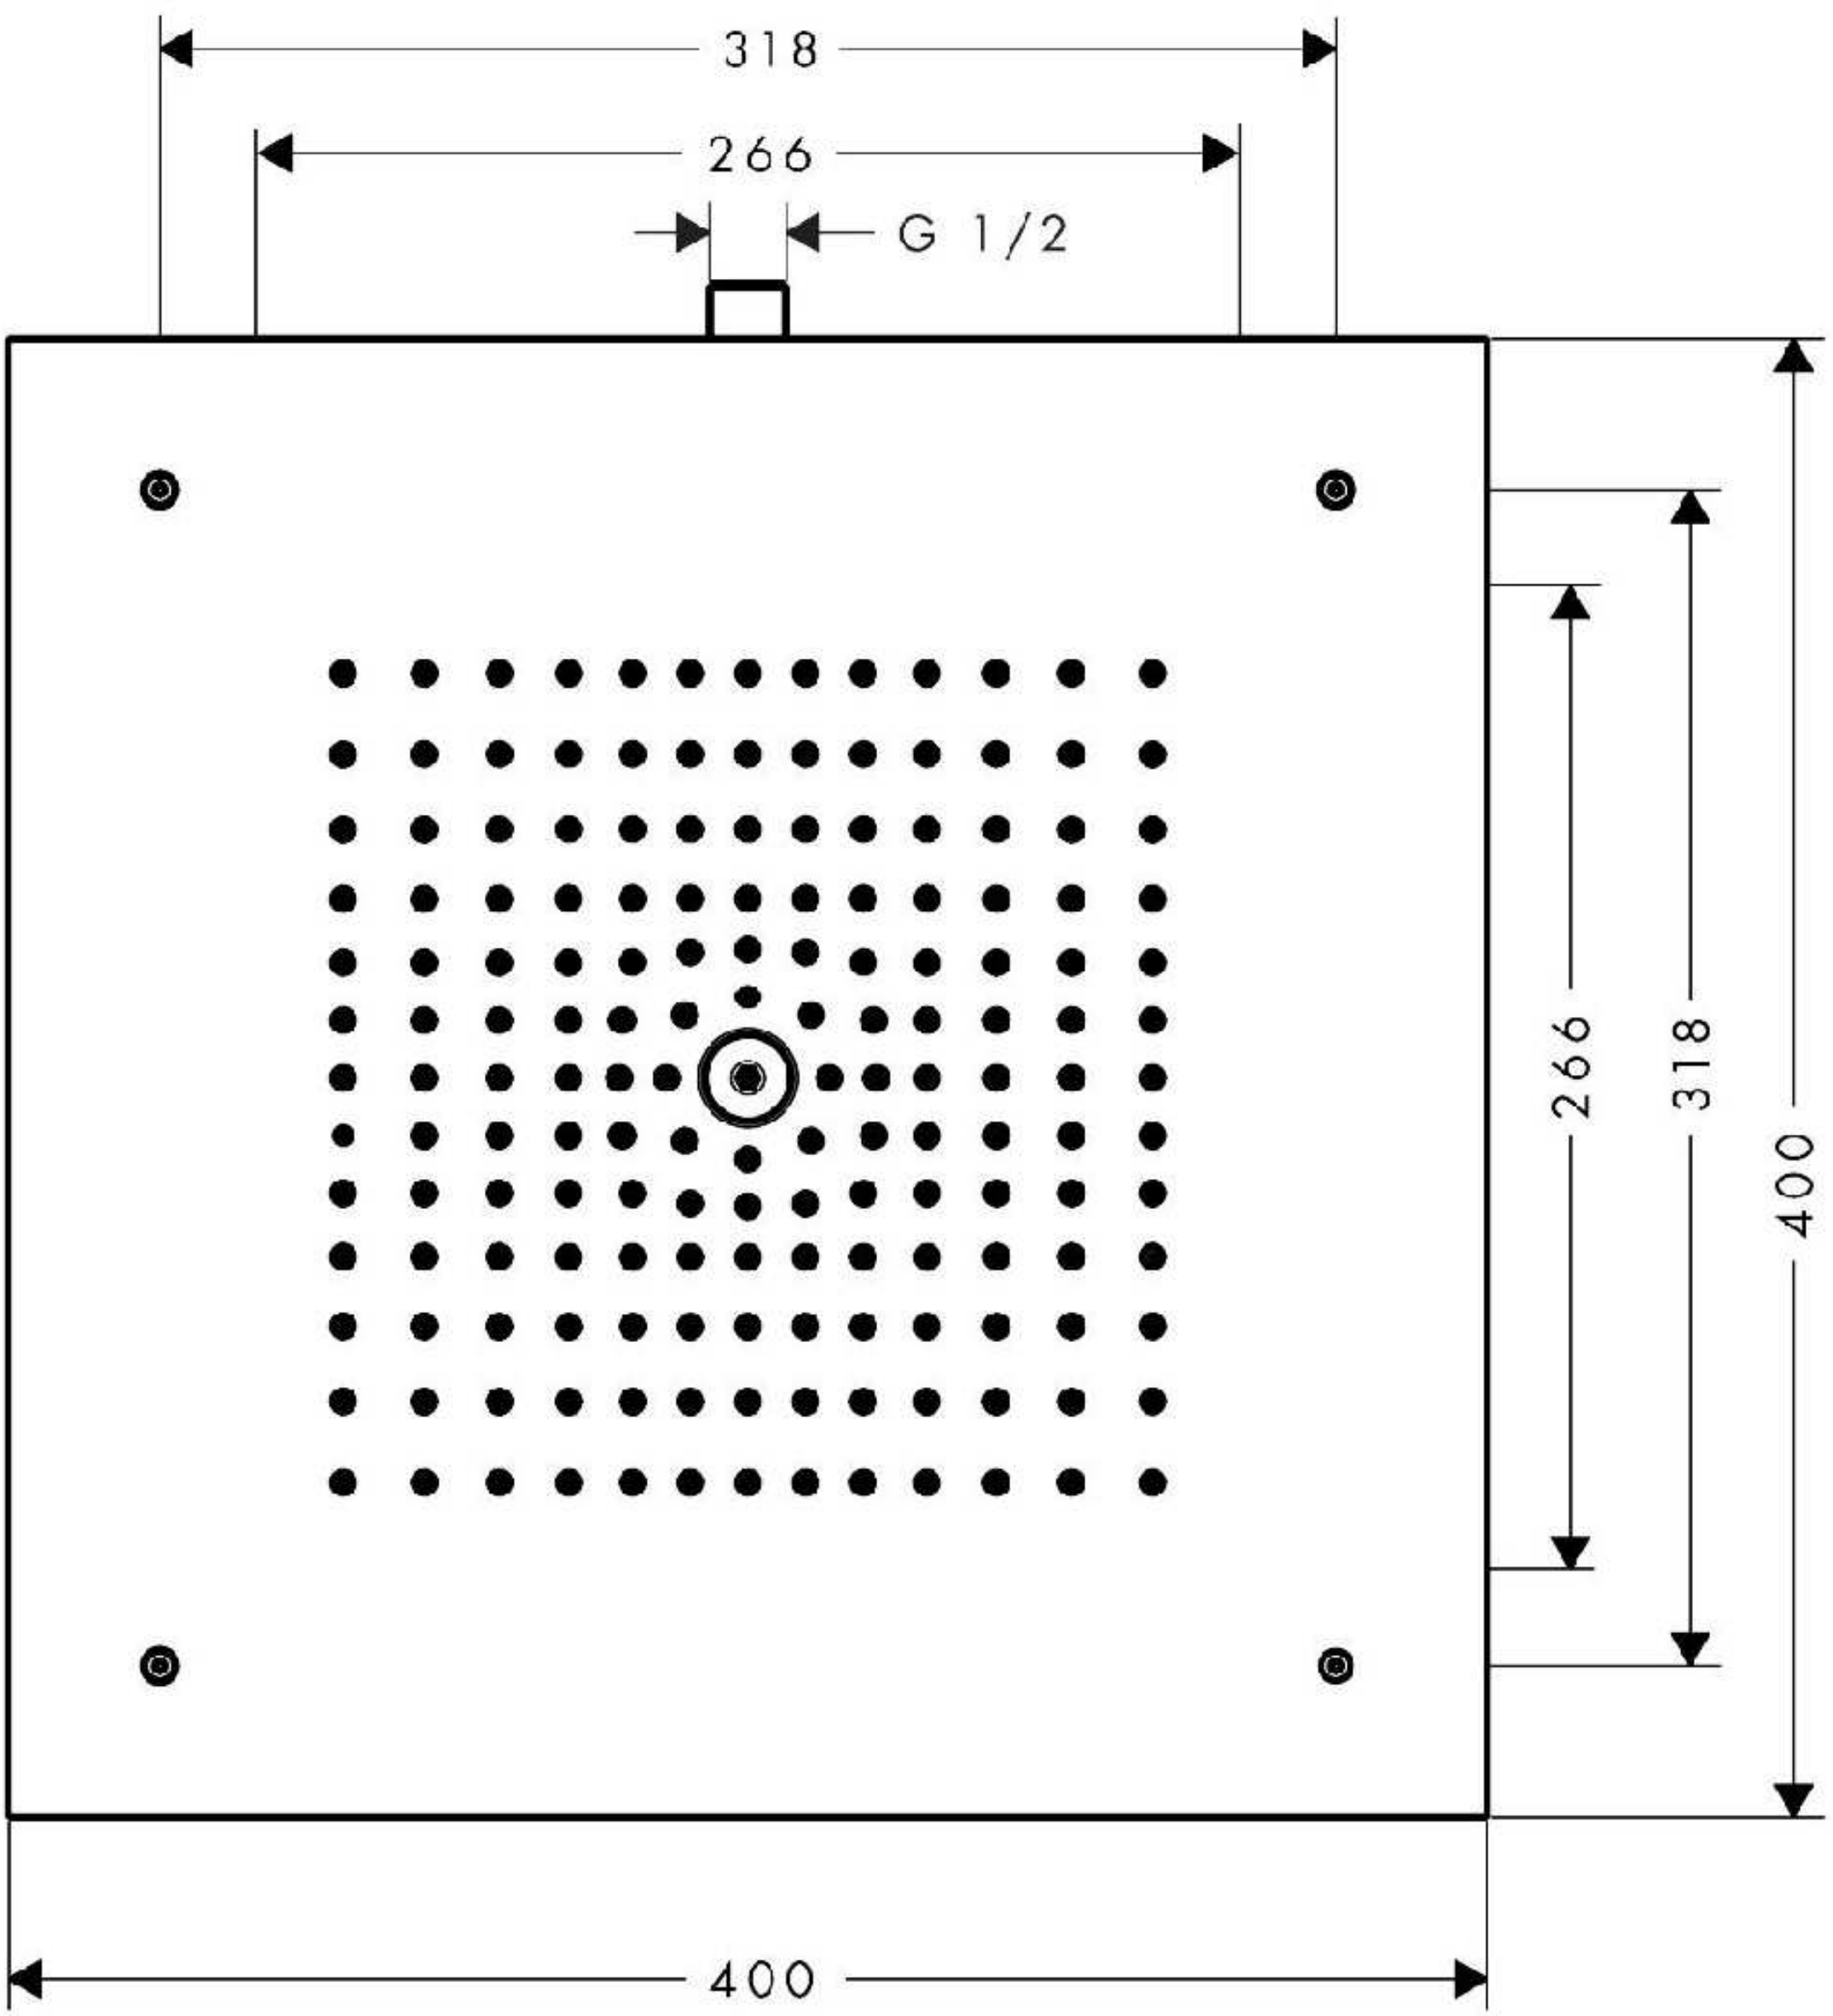
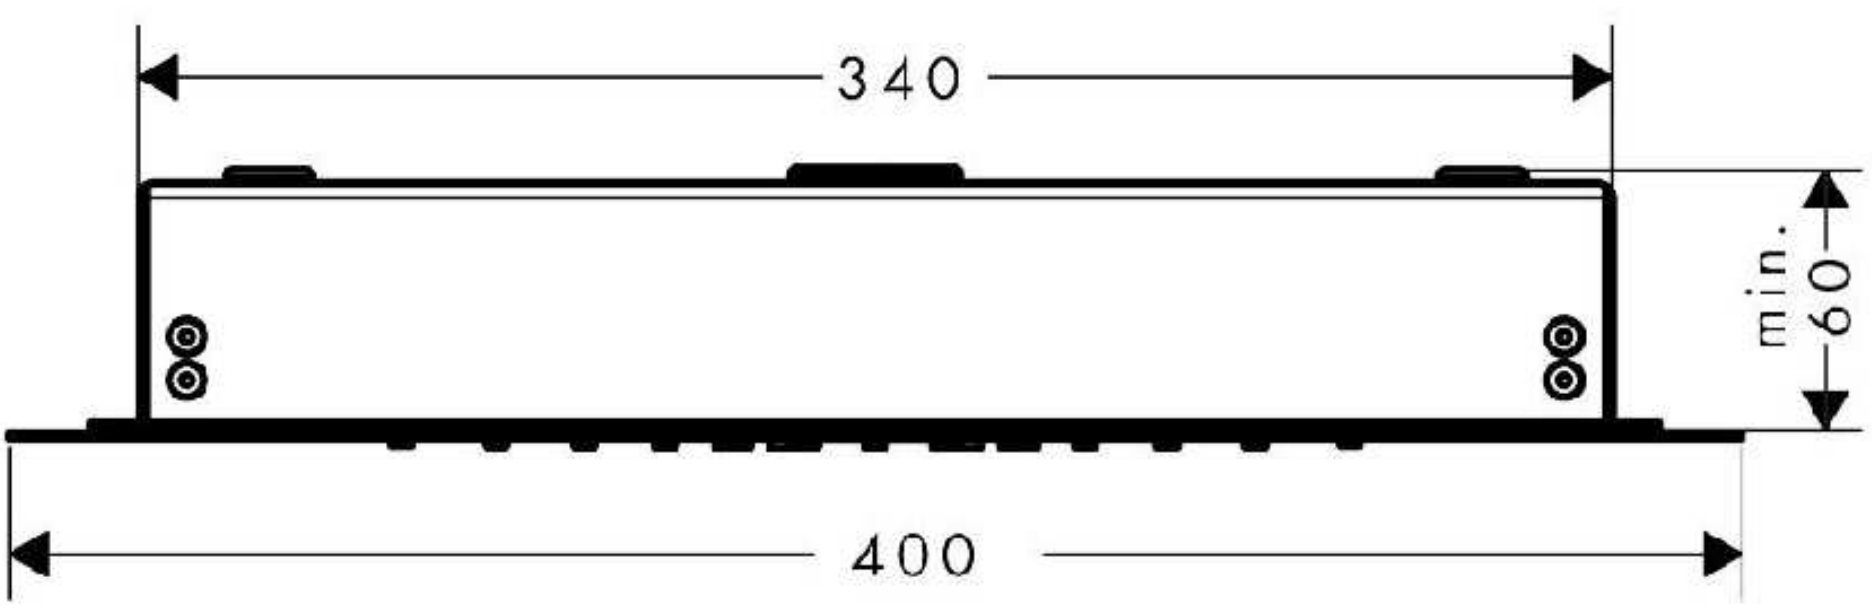
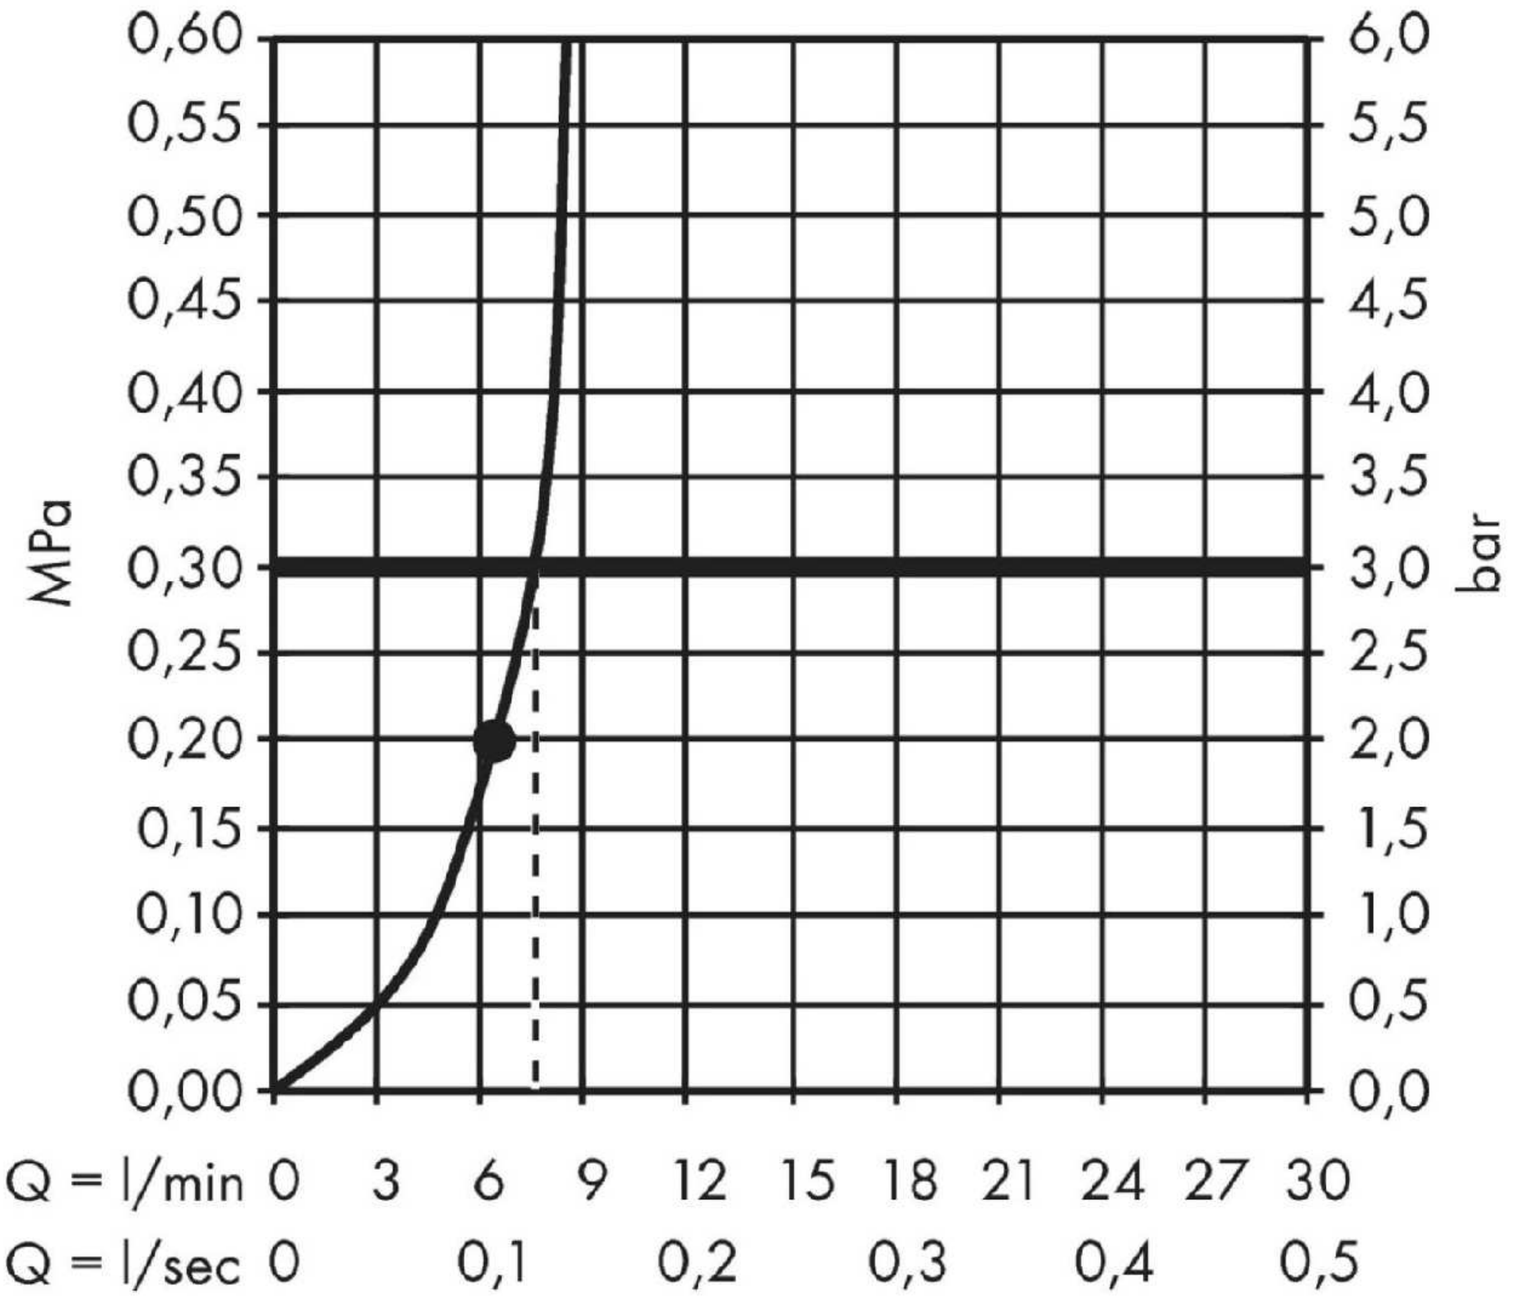

318
266
G 1/2
266
318
400
400


340
min.
60
400



The consumption was measured in combination with the appropriate fittings (thermostat/mixer/ in-wall valve) to reflect actual application in practice.