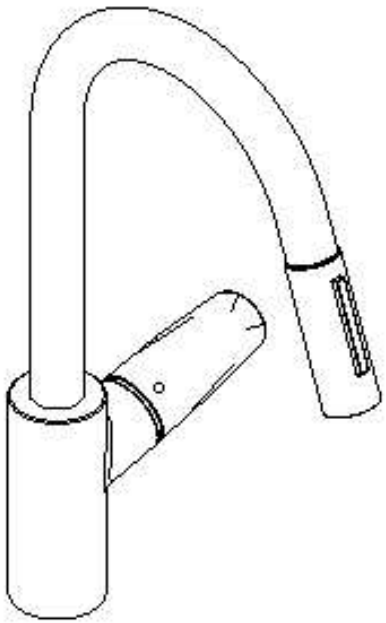
hansgrohe

EN Instructions for use / Assembly instructions 2
DE Gebrauchsanleitung / Montageanleitung 3



Decor 240 2jet
31815XX3

Safety Notes

⚠ Gloves should be worn during installation to prevent crushing and cutting injuries.

⚠ The product may only be used for bathing, hygienic and body cleaning purposes.

⚠ The hot and cold supplies must be of equal pressures.

Installation Instructions

- Prior to installation, inspect the product for transport damages. After it has been installed, no transport or surface damage will be honoured.
- The pipes and the fixture must be installed, flushed and tested as per the applicable standards.
- The plumbing codes applicable in the respective countries must be observed.

Technical Data

Operating pressure:	max. 1 MPa
Recommended operating pressure:	0,1 - 0,5 MPa
Test pressure:	1,6 MPa
	11 MPa = 10 bar = 147 PSI
Hot water temperature:	max. 70°C
Recommended hot water temp.:	65°C
Thermal disinfection:	max. 70 °C / 4 min

The product is exclusively designed for drinking water!

Symbol description

Do not use silicone containing acetic acid!

Adjustment (see page 6)

To adjust the hot water limiter. Using a hot water limiter in combination with a continuous flow water heater is not recommended.

Maintenance (see page 9)

The check valves must be checked regularly according to EN 806-5 in accordance with national or regional regulations (at least once a year).

Dimensions (see page 8)

Flow diagram (see page 8)

① Normal spray
② Regular

Spare parts (see page 7)

XX - Colors
00 - Chrome Plated
34 - Brushed Black Chrome
67 - Matt Black

Cleaning (see page 9)

Operation (see page 10)

- Hansgrohe recommends not to use as drinking water the first half liter of water drawn in the morning or after a prolonged period of non-use.
- Do not rotate the spout further than 360° or damage to the hose will result.

Fault	Cause	Remedy
Mixer stiff	· Cartridge defective, calcified	· Exchange cartridge
Mixer dripping	· Cartridge defective	· Exchange cartridge
Water escaping at the threaded base	· connection hoses not completely screwed into basic body	· Tighten connection hoses by hand
	· O-ring at the connection hose defective.	· Exchange O-ring
Hot water temperature too low	· Hot water limiter incorrectly set	· Set hot water limiter

Assembly (see page 4)

Sicherheitshinweise

⚠ Bei der Montage müssen zur Vermeidung von Quetsch- und Schnittverletzungen Handschuhe getragen werden.

⚠ Das Produkt darf nur zu Bade-, Hygiene- und Körperreinigungszwecken eingesetzt werden.

⚠ Große Druckunterschiede zwischen den Kalt- und Warmwasseranschlüssen müssen ausgeglichen werden.

Montagehinweise

- Vor der Montage muss das Produkt auf Transportschäden untersucht werden. Nach dem Einbau werden keine Transport- oder Oberflächenschäden anerkannt.
- Die Leitungen und die Armatur müssen nach den gültigen Normen montiert, gespült und geprüft werden.
- Die in den Ländern jeweils gültigen Installationsrichtlinien sind einzuhalten.

Technische Daten

Betriebsdruck:	max. 1 MPa
Empfohlener Betriebsdruck:	0,1 - 0,5 MPa
Prüfdruck:	1,6 MPa
	(1 MPa = 10 bar = 147 PSI)
Heißwassertemperatur:	max. 70°C
Empfohlene Heißwassertemperatur:	65°C
Thermische Desinfektion:	max. 70 °C / 4 min

Das Produkt ist ausschließlich für Trinkwasser konzipiert!

Symbolerklärung

Kein essigsäurehaltiges Silikon verwenden!

Justierung (siehe Seite 6)

Einstellen der Warmwasserbegrenzung. In Verbindung mit Durchlauferhitzern ist eine Warmwassersperre nicht zu empfehlen.

Wartung (siehe Seite 9)

Rückflussverhinderer müssen gemäß EN 806-5 regelmäßig in Übereinstimmung mit nationalen oder regionalen Bestimmungen auf ihre Funktion geprüft werden (mindestens einmal jährlich).

Maße (siehe Seite 8)

Durchflussdiagramm (siehe Seite 8)

① Normalstrahl
② Brausestrahl

Servicetaile (siehe Seite 7)

XX – Farboodierung
00 – Chrom
34 – Brushed Black Chrome
67 – Mattschwarz

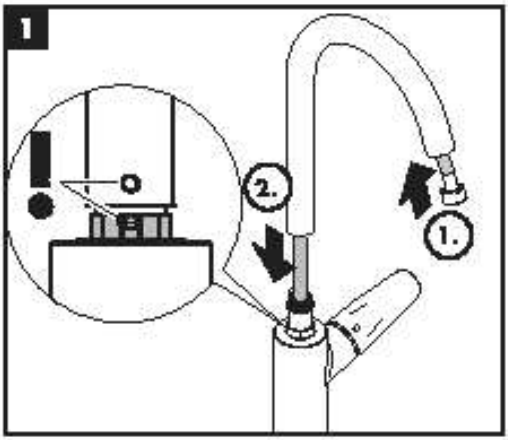
Reinigung (siehe Seite 9)

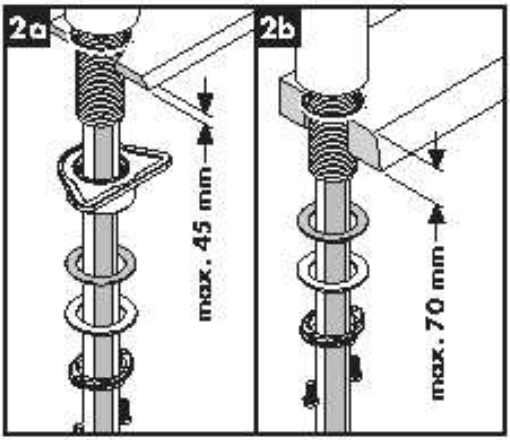
Bedienung (siehe Seite 10)

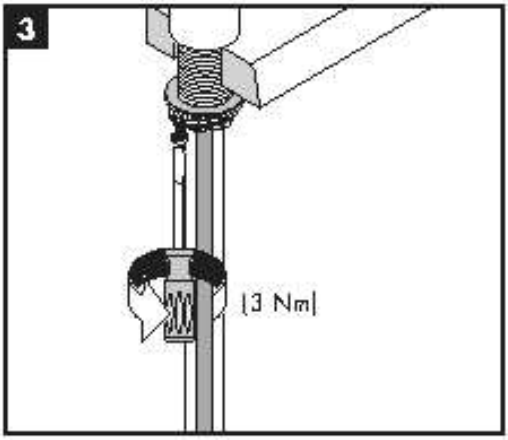
- Hansgrohe empfiehlt, morgens oder nach längeren Stagnationszeiten den ersten halben Liter nicht als Trinkwasser zu verwenden.
- Auslauf nicht weiter drehen als 360°, da sonst der Schlauch beschädigt werden kann.

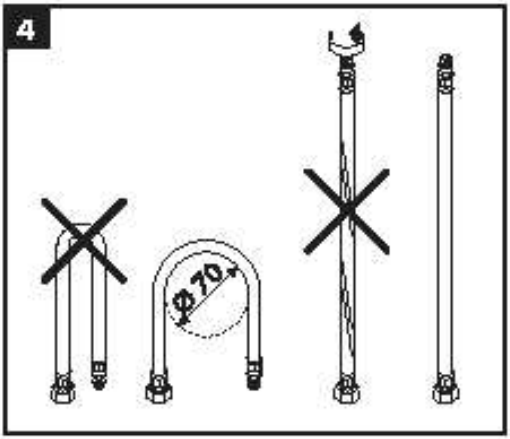
Störung	Ursache	Abhilfe
Armatur schwergängig	· Kartusche defekt, verkalkt	· Kartusche austauschen
Armatur tropft	· Kartusche defekt	· Kartusche austauschen
Wasseraustritt am Befestigungsschaft	· Anschlussschläuche nicht ganz in den Grundkörper eingeschraubt	· Anschlussschläuche von Hand festziehen
	· O-Ring am Anschlussschlauch defekt	· O-Ring austauschen
Zu niedrige Warmwassertemperatur	· Warmwasserbegrenzung falsch eingestellt	· Warmwasserbegrenzung einstellen

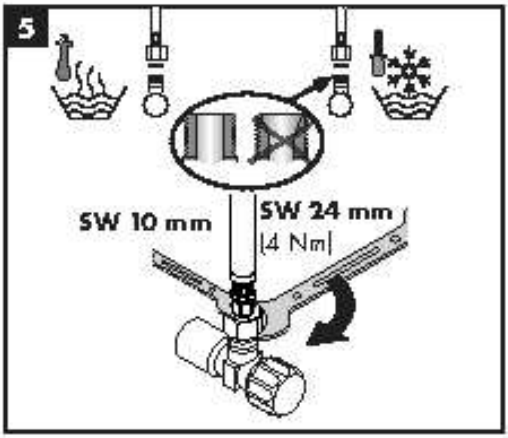
Montage (siehe Seite 4)

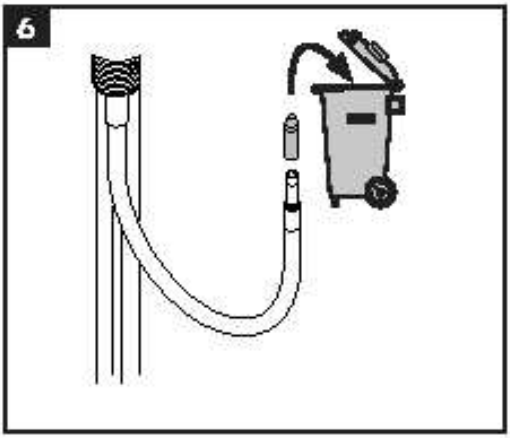

1
2.
1.

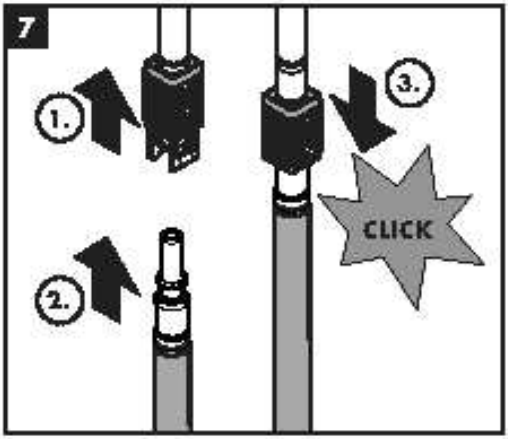

2a
max. 45 mm
2b
max. 70 mm

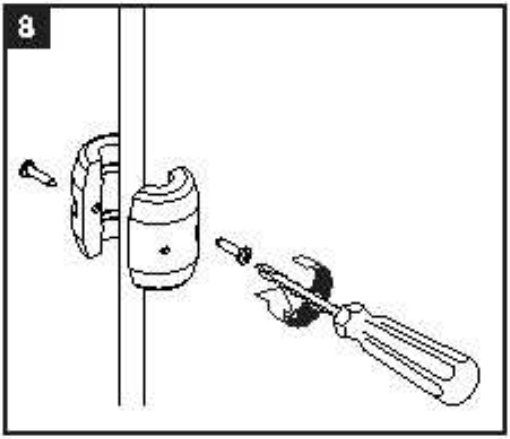

3
(3 Nm)

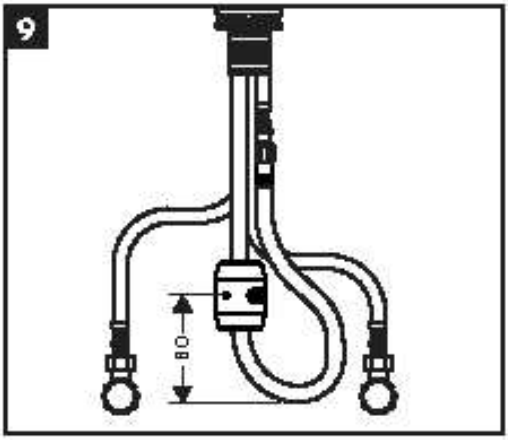

4
ø70

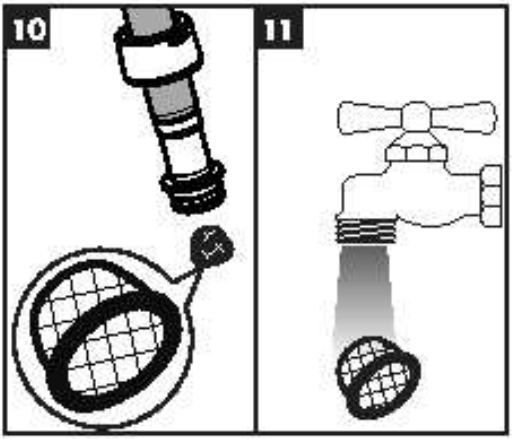

5
SW 10 mm
SW 24 mm
(4 Nm)

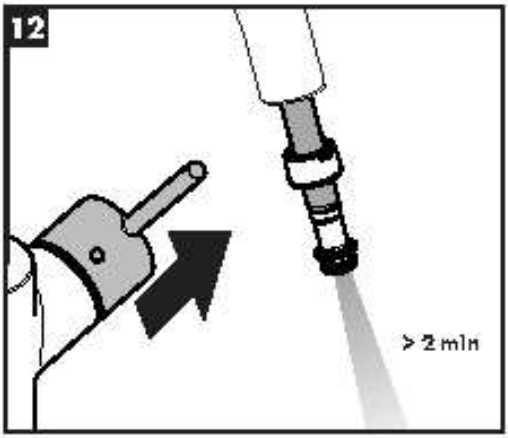

6

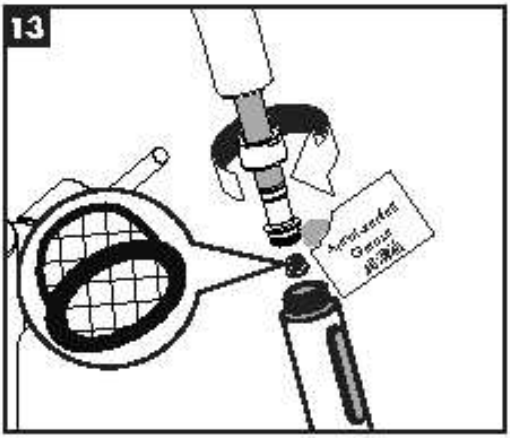

7
1.
2.
3.
CLICK


8


9
80


10
11

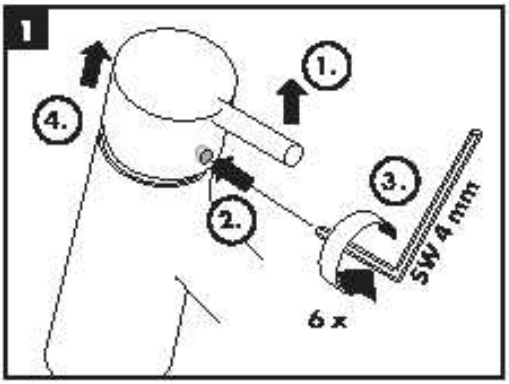

12
> 2 min

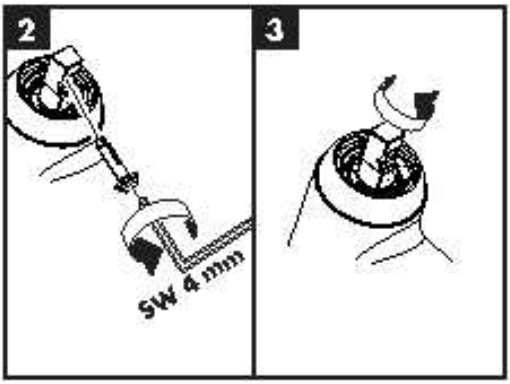

13

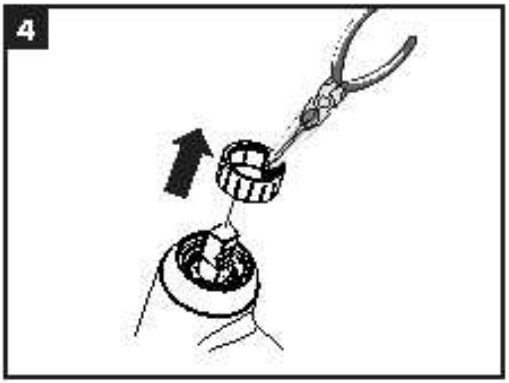

60 °C

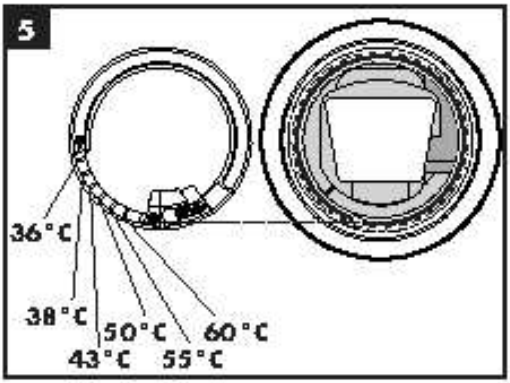

10 °C

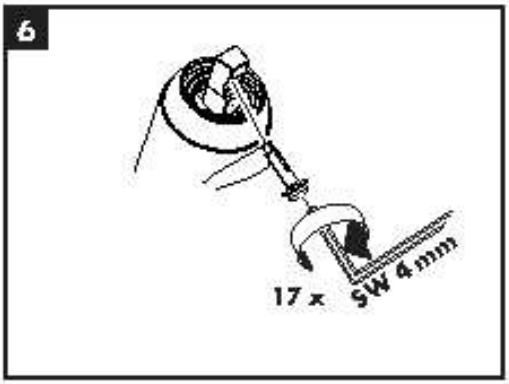

0,3 MPa

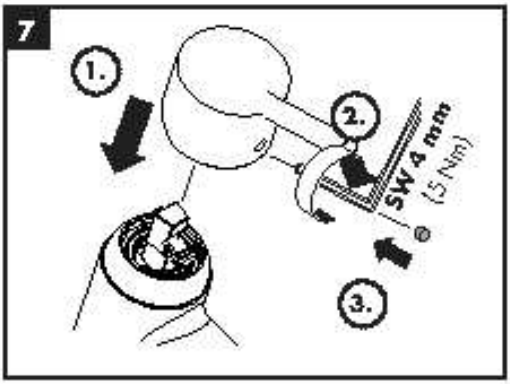

1
4.
1.
2.
3.
SW 4 mm
6 x

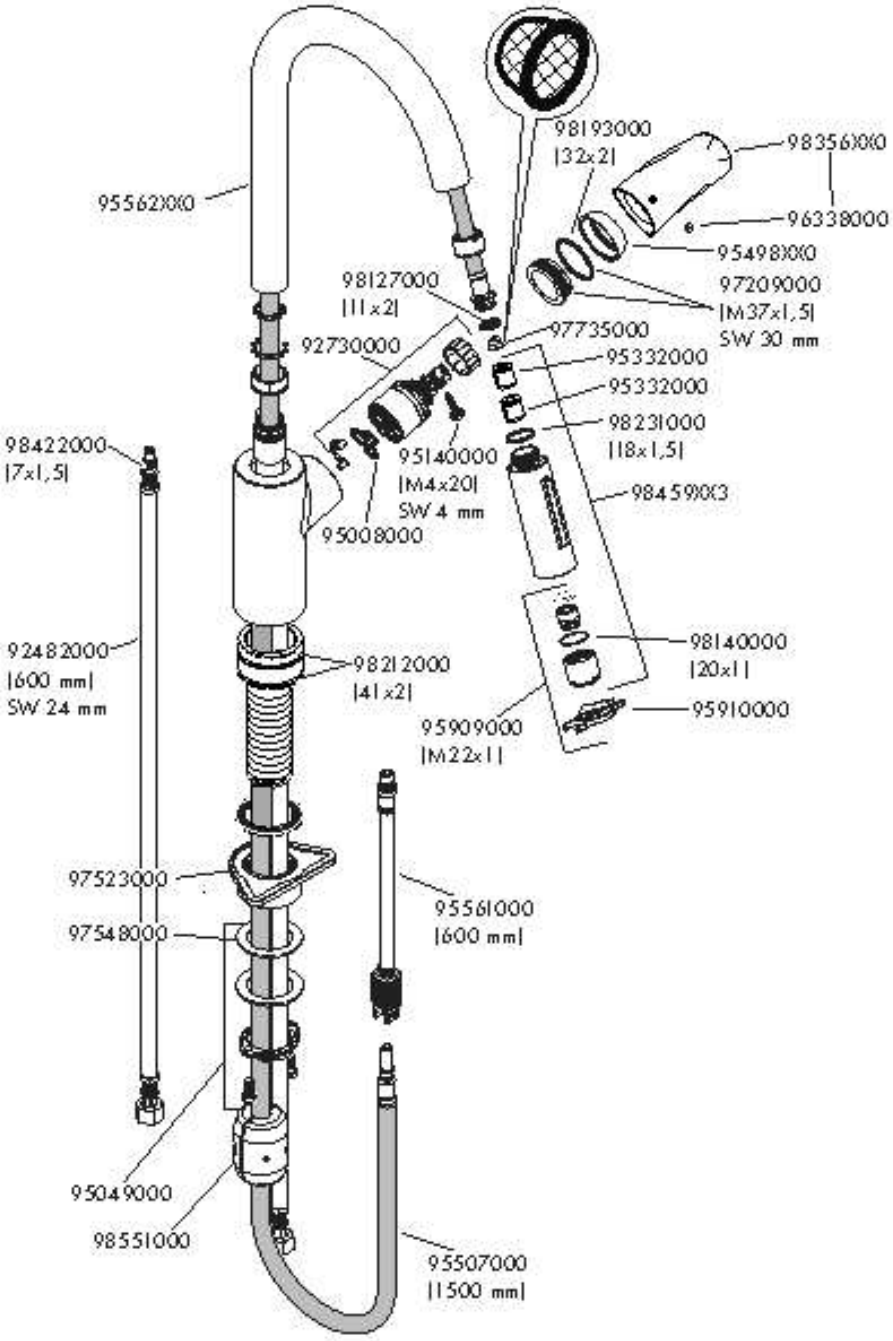

2
SW 4 mm
3

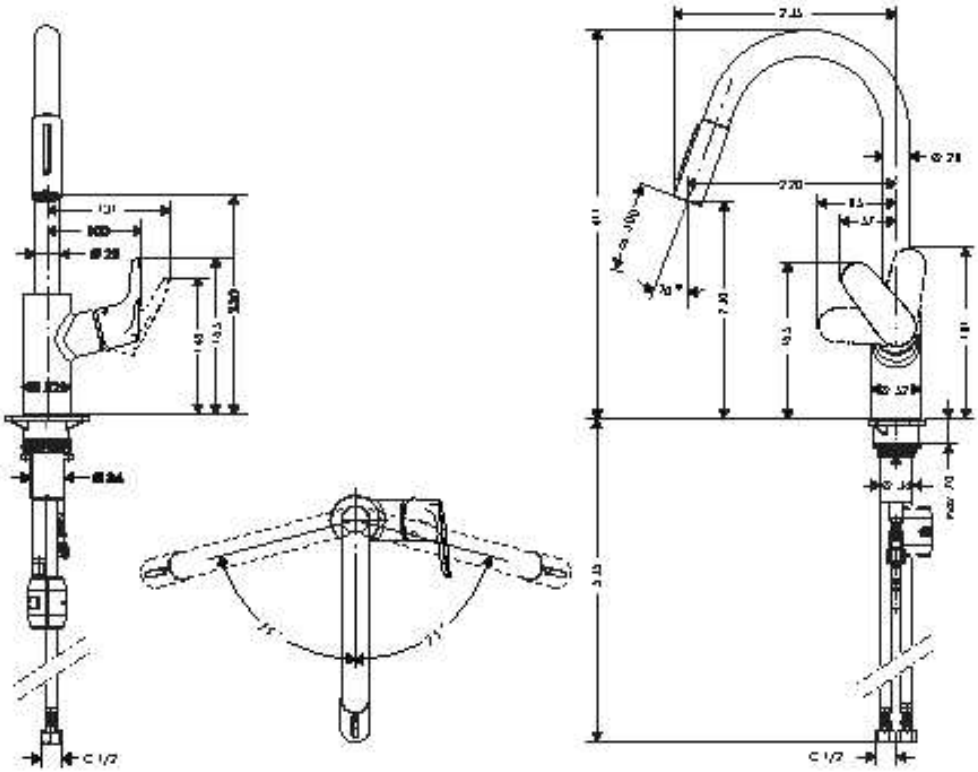

4

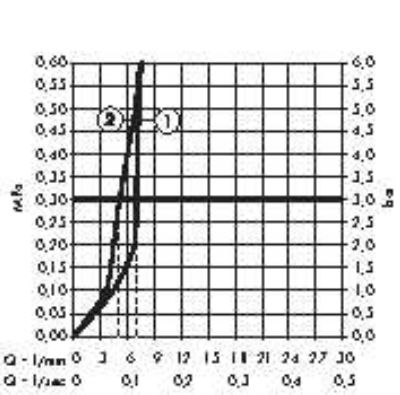

5
36 °C
38 °C
43 °C
50 °C
55 °C
60 °C


6
17 x
SW 4 mm


7
1.
2.
SW 4 mm
(5 Nm)
3.


95562000
98193000
(32x2)
98356000
96338000
95498000
97209000
(M37x1,5)
SW 30 mm
98127000
(11x2)
97735000
92730000
95332000
95332000
98231000
(18x1,5)
98422000
(7x1,5)
95140000
(M4x20)
SW 4 mm
95008000
98459003
98140000
(20x1)
92482000
(600 mm)
SW 24 mm
98212000
(41x2)
95909000
(M22x1)
95910000
97523000
95561000
(600 mm)
97548000
95049000
98551000
95507000
(1500 mm)




0,60
0,55
0,50
0,45
0,40
0,35
0,30
0,25
0,20
0,15
0,10
0,05
0,00
6,0
5,5
5,0
4,5
4,0
3,5
3,0
2,5
2,0
1,5
1,0
0,5
0,0
MPa
bar
2
1
Q - l/min 0 3 6 9 12 15 18 21 24 27 30
Q - l/sec 0 0,1 0,2 0,3 0,4 0,5


1
2

www.hansgrohe.com/
cleaning-recommendation



www.hansgrohe.com/
cleaning-recommendation



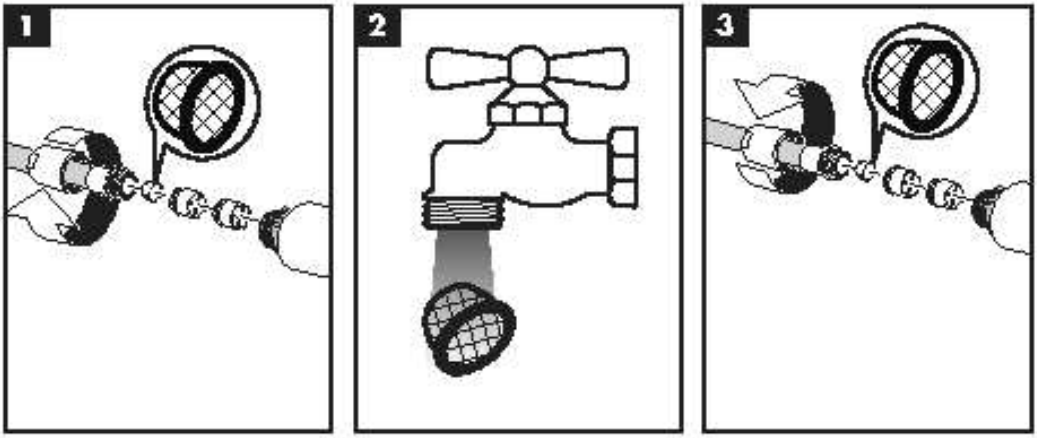
www.hansgrohe.com/
cleaning-recommendation

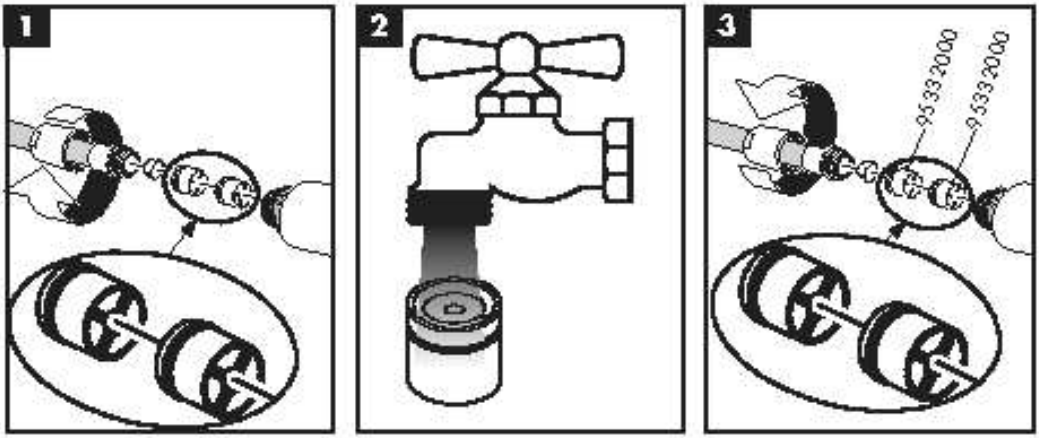


www.hansgrohe.com/
cleaning-recommendation

EN Cleaning recommendation / Warranty / Contact

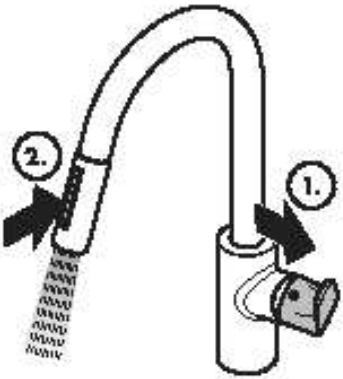
DE Reinigungsempfehlung / Garantie / Kontakt







open / öffnen



open / öffnen



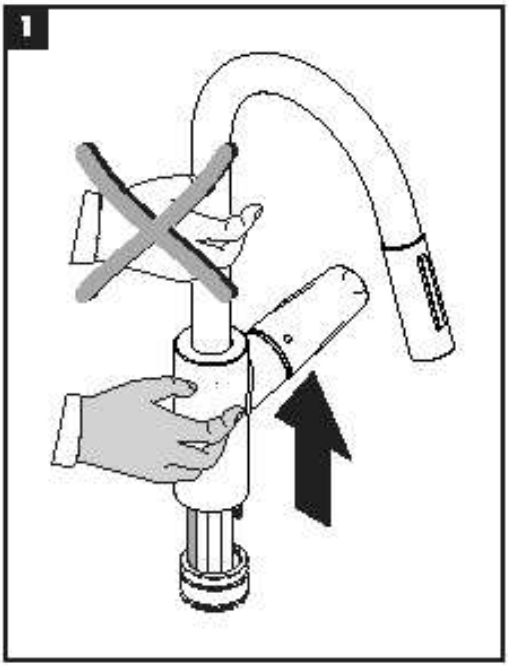
close / schließen

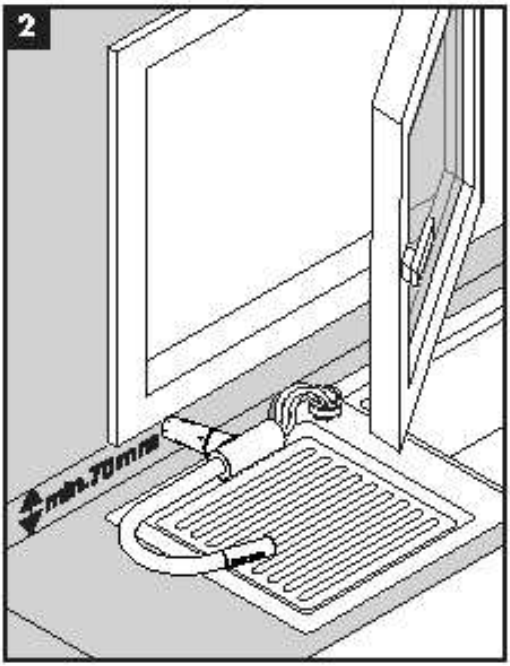


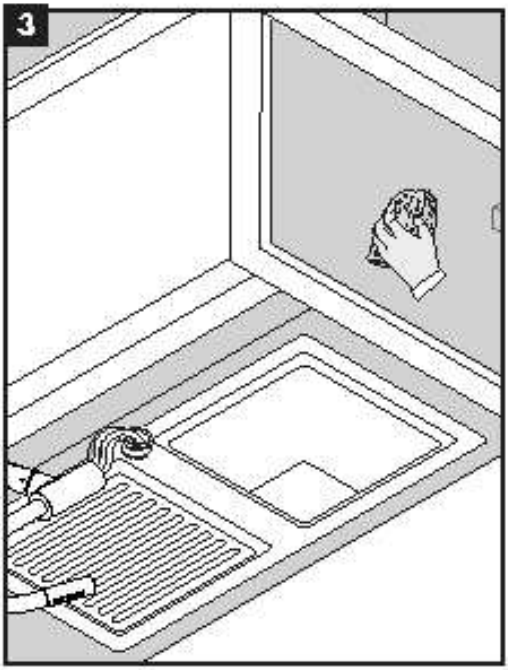
hot / warm

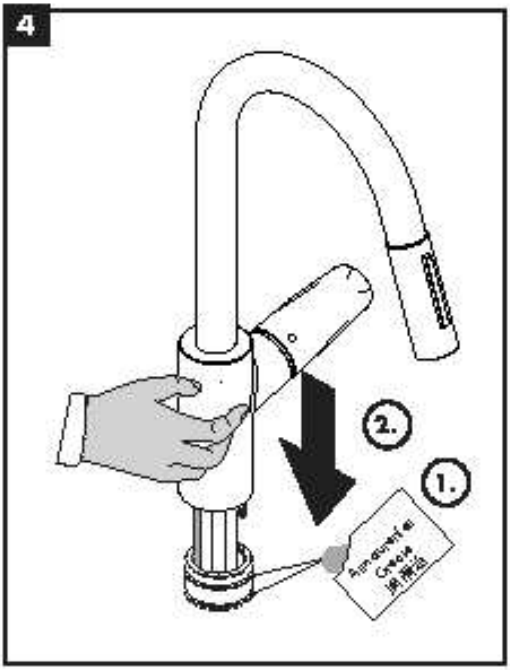


cold / kalt


1


2
min.70mm


3


4
2.
1.

hansgrohe

Hansgrohe · Auestraße 5 - 9 · D-77761 Schiltach · Telefon +49 (0) 7836/51-1212 · Telefax +49 (0) 7836/511440
E-Mail: info@hansgrohe.com · Internet: www.hansgrohe.com

06/2000
96 554 612