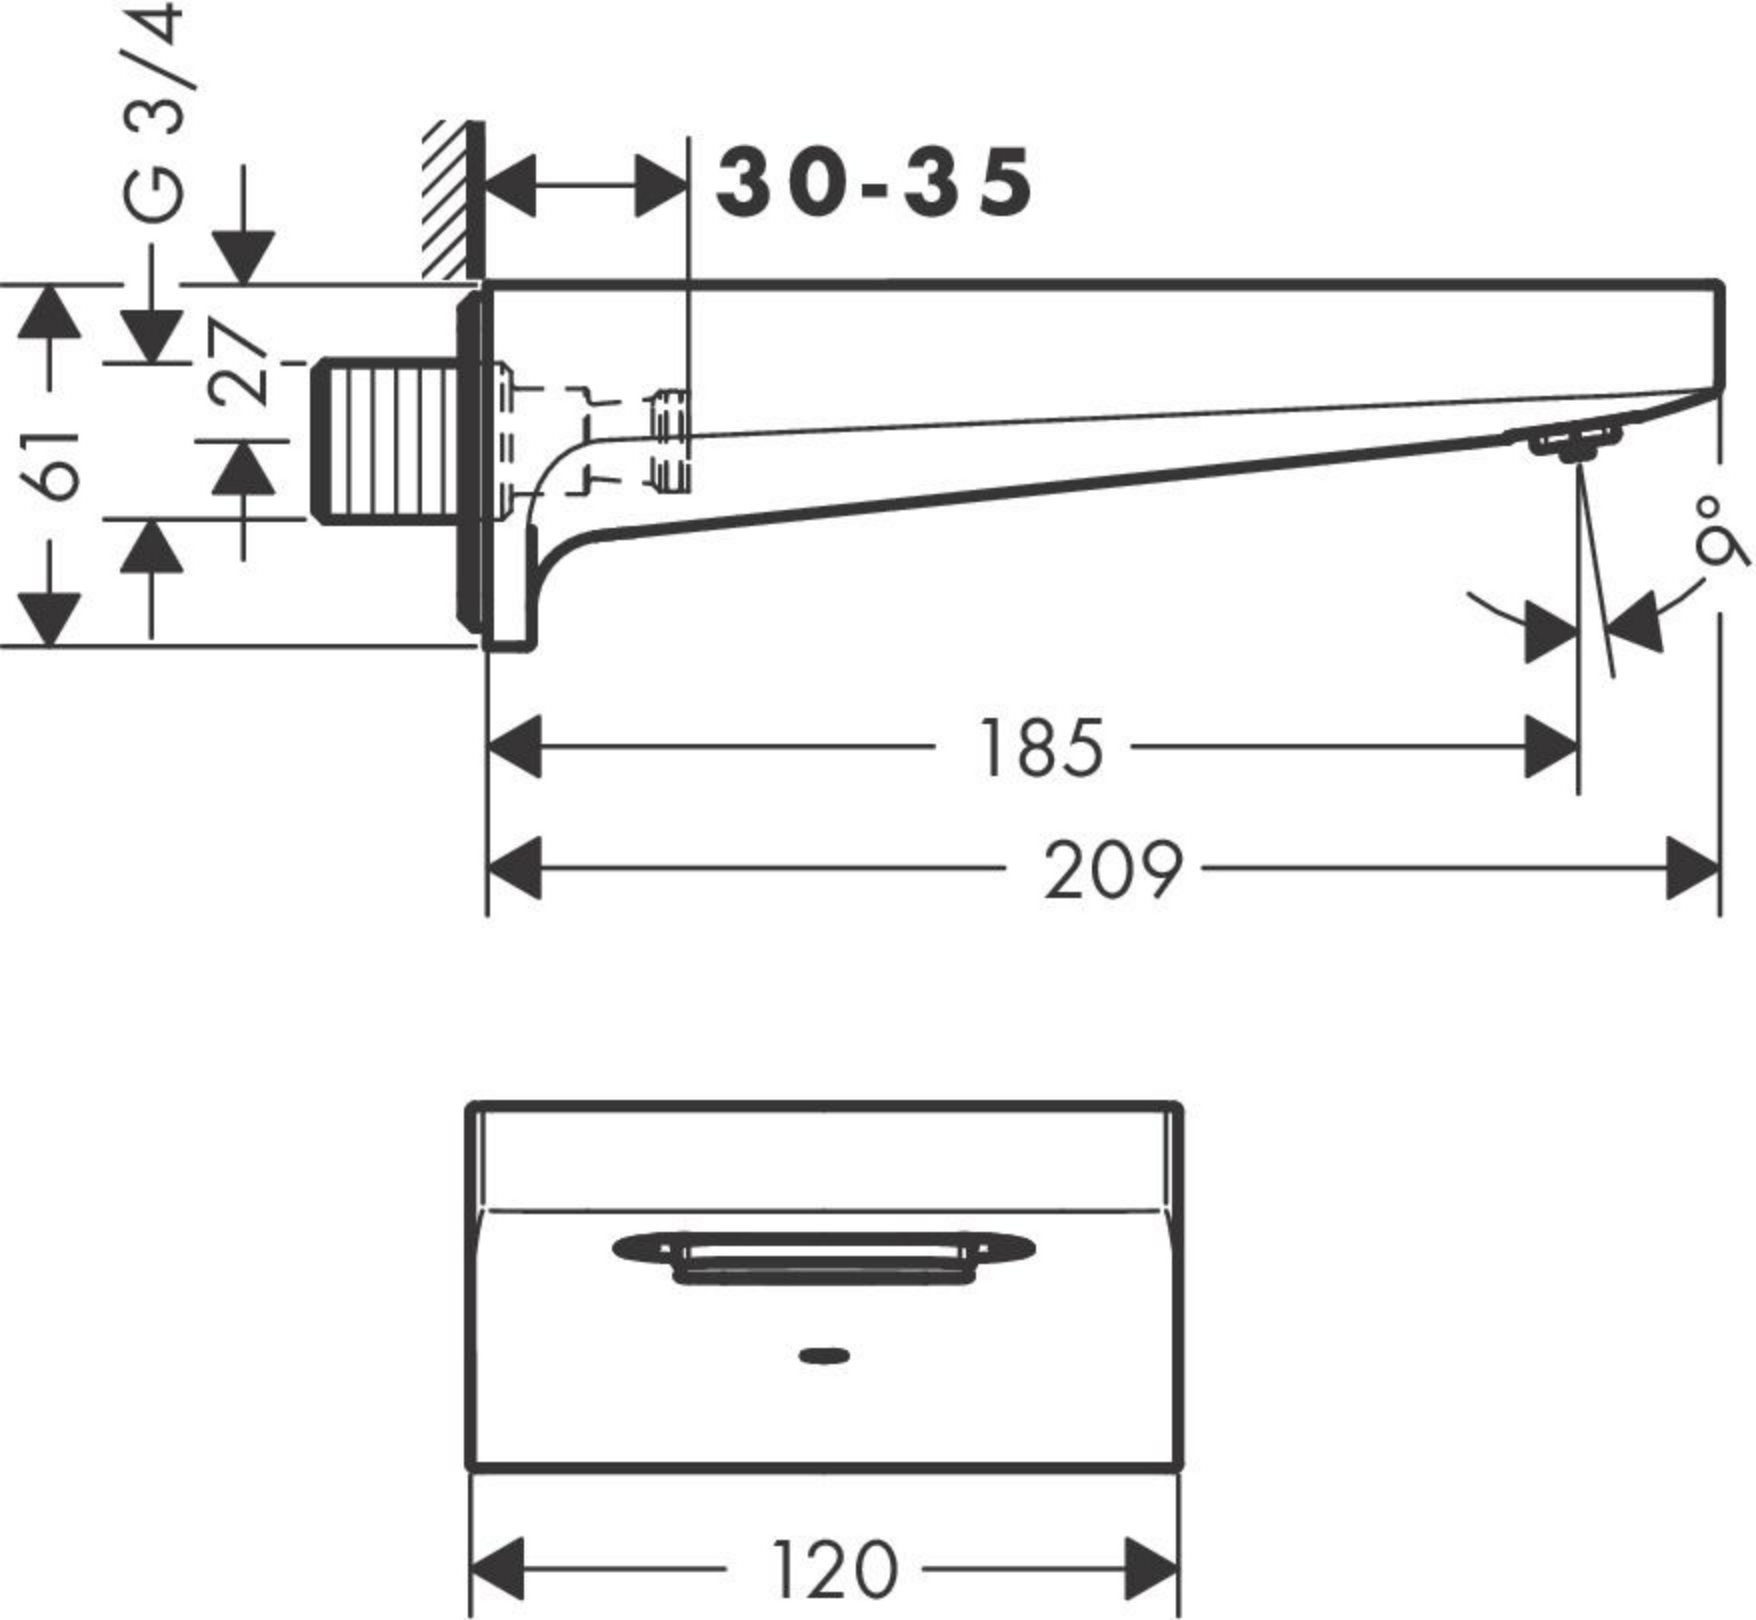
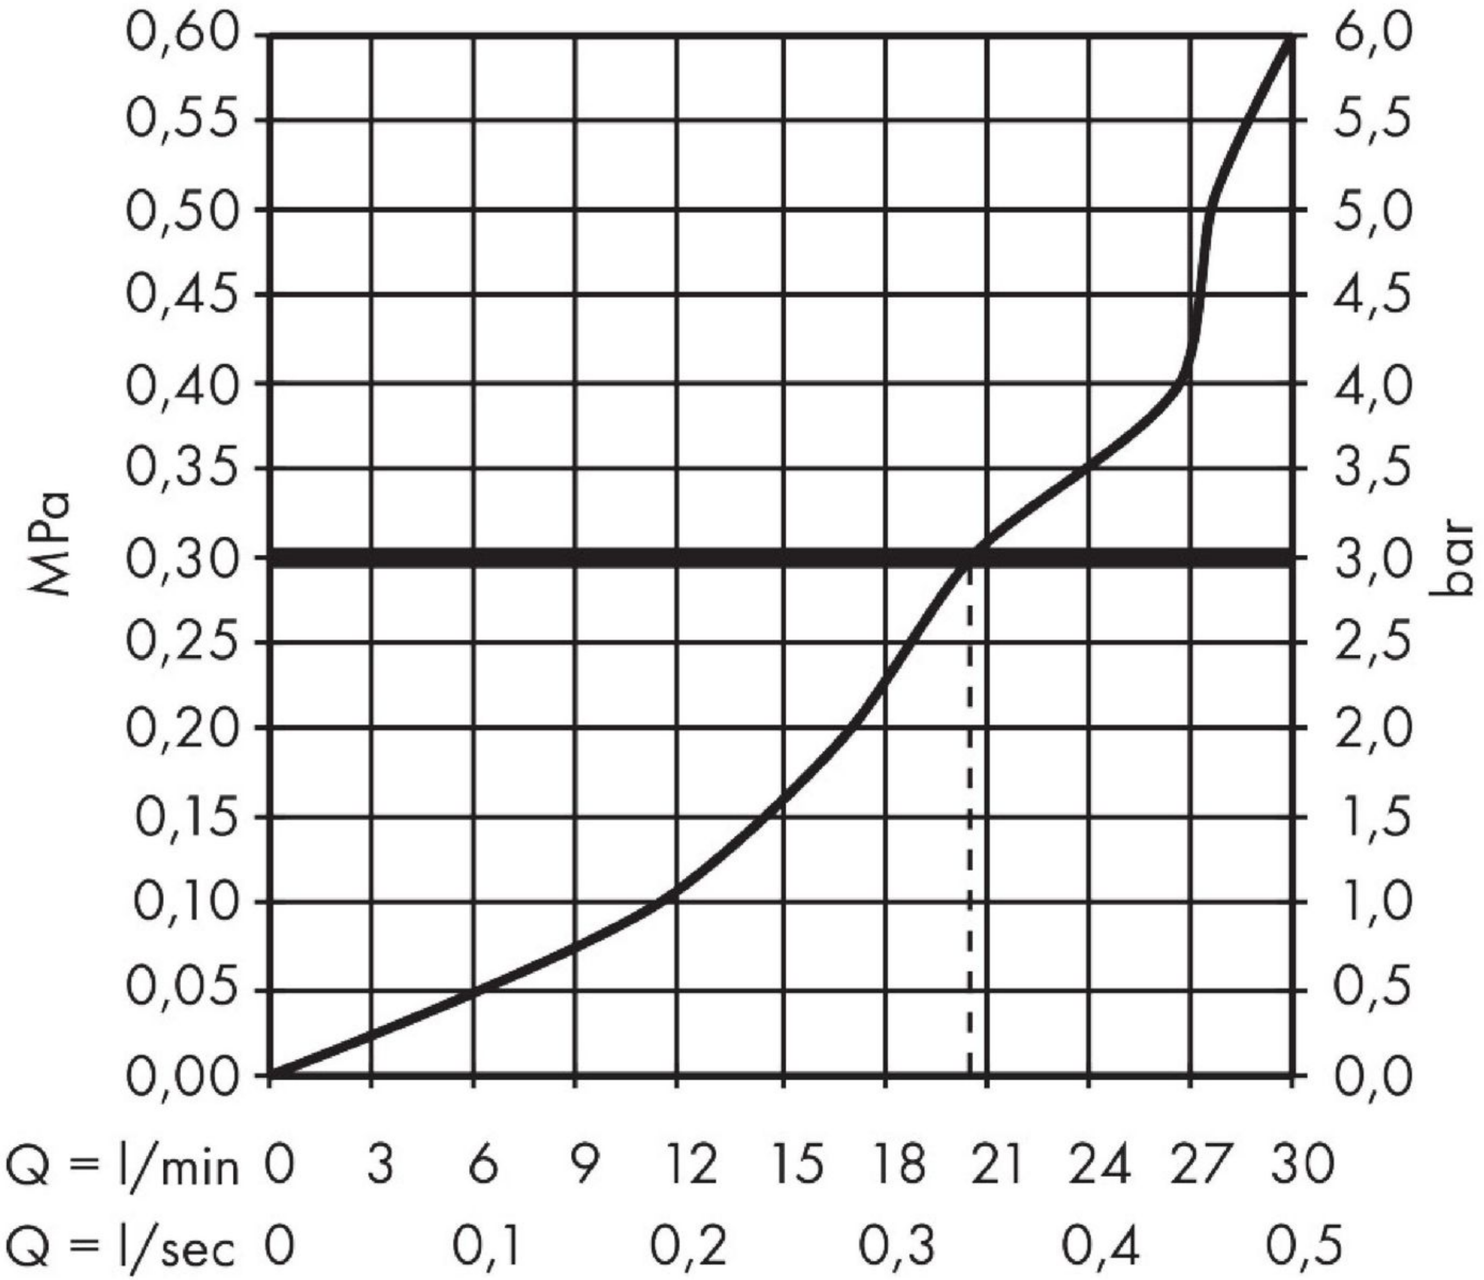

G 3/4
30-35
61
27
9°
185
209
120



The consumption was measured in combination with the appropriate fittings (thermostat/mixer/in-wall valve) to reflect actual application in practice.