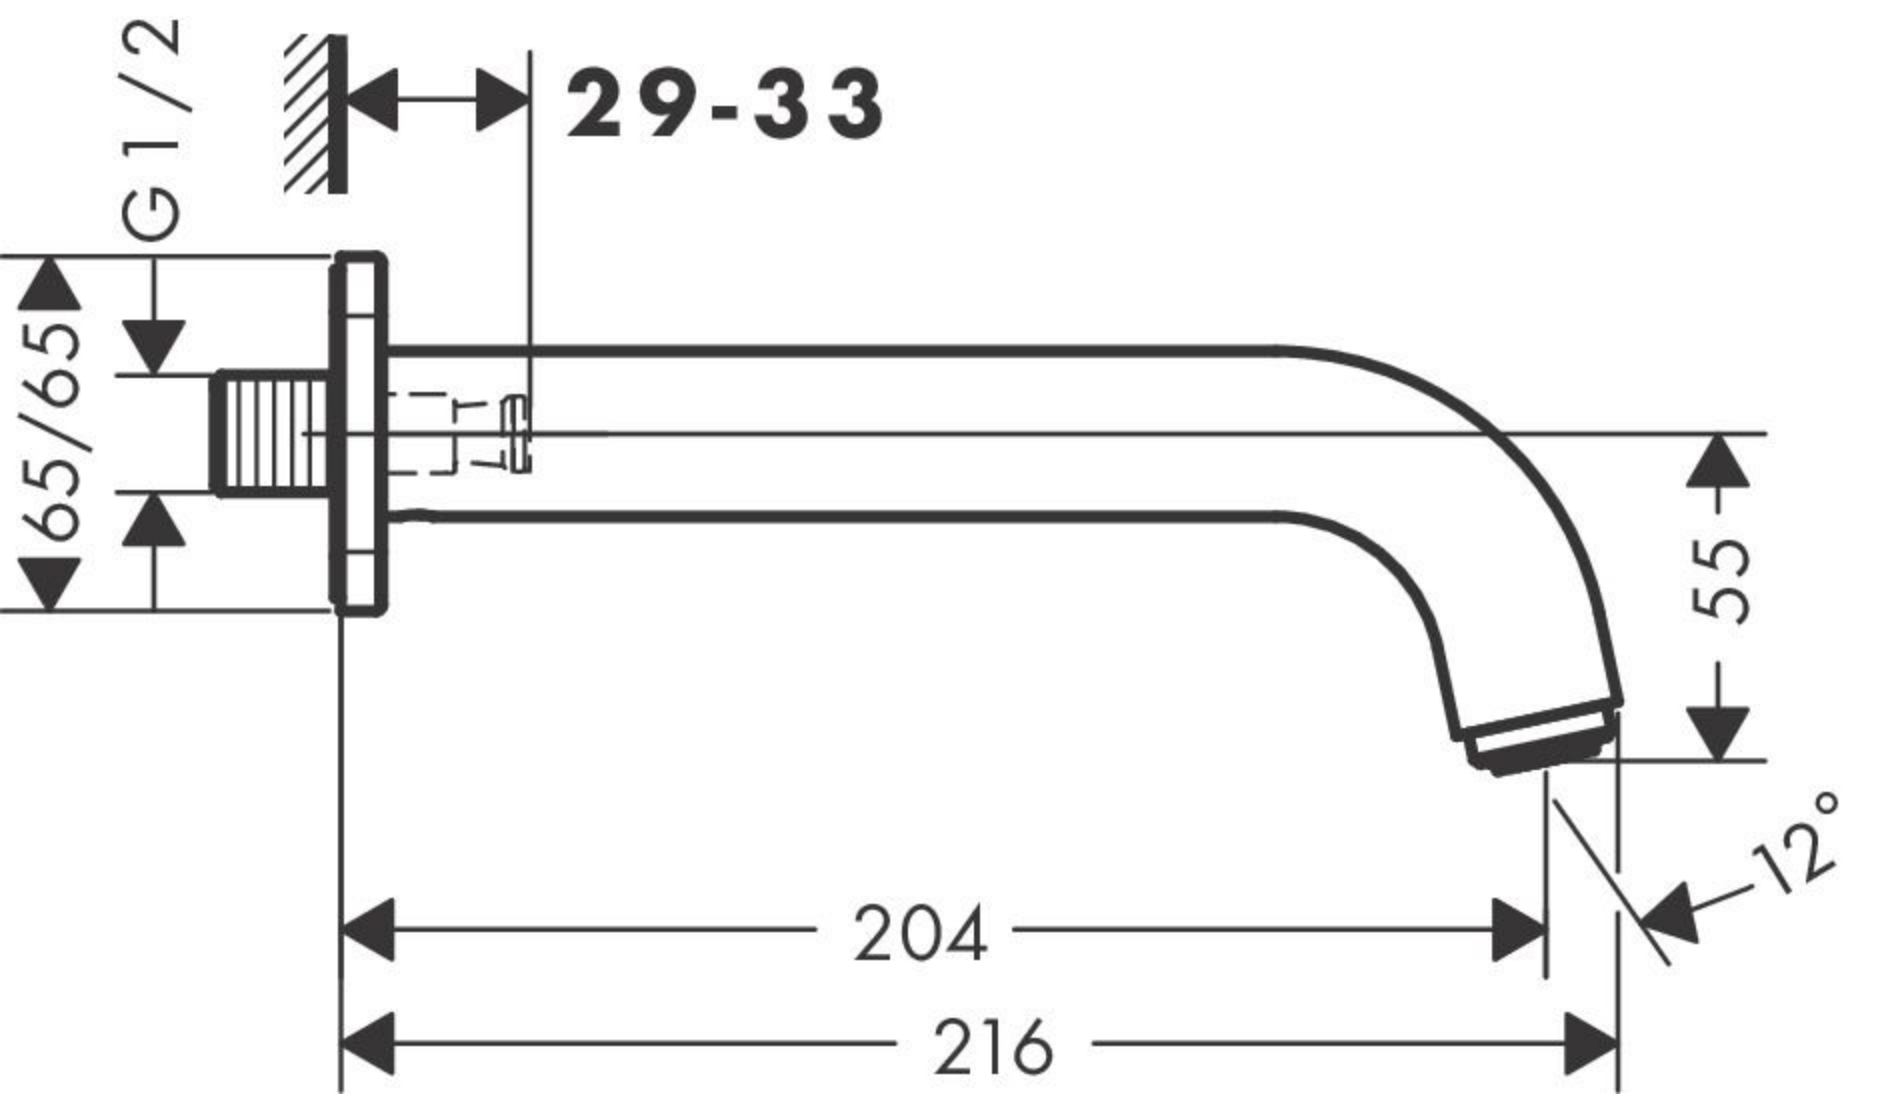
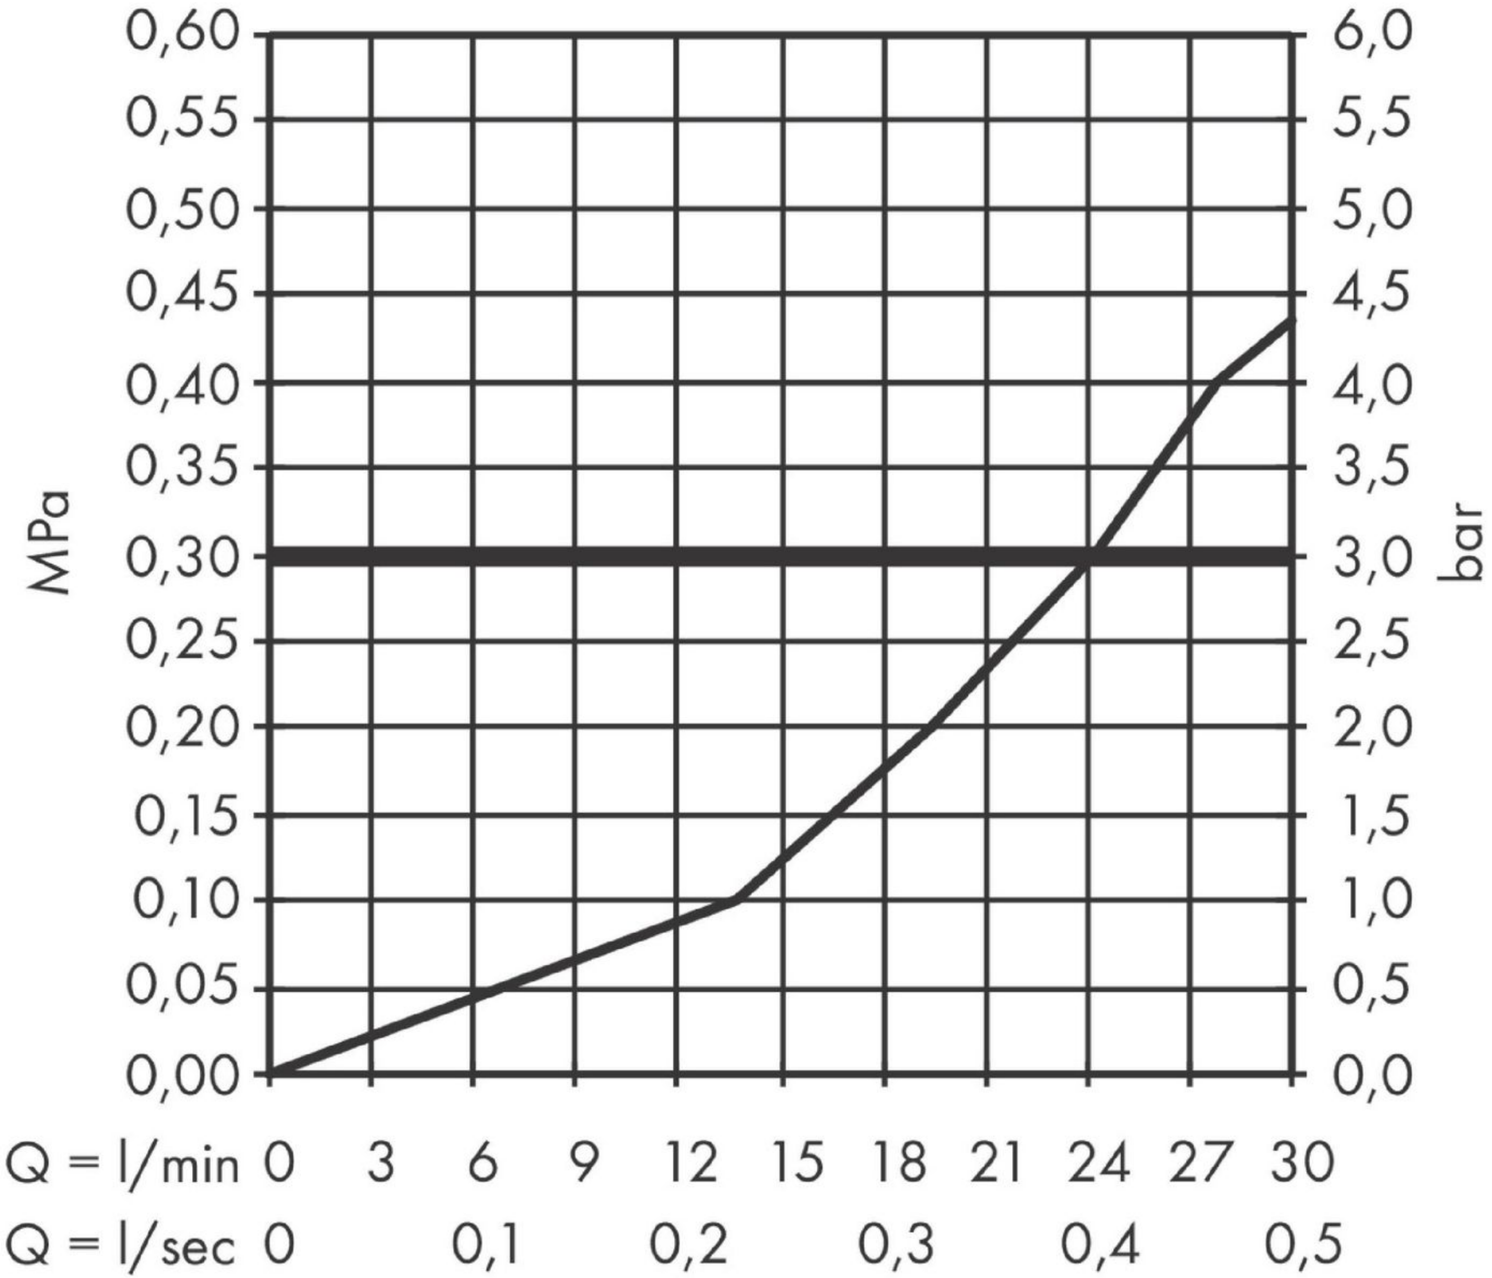

G 1/2
29-33
65/65
55
12°
204
216



The consumption was measured in combination with the appropriate fittings (thermostat/mixer/ in-wall valve) to reflect actual application in practice.