hansgrohe

EN Instructions for use / assembly instructions 2

DE Gebrauchsanleitung / Montageanleitung 3

Talis S 80
72012XX3



Talis S 100
72021XX3



Talis E 80
71702003



Talis E 110
71712XX3

Safety Notes

⚠ Gloves should be worn during installation to prevent crushing and cutting injuries.

⚠ The product may only be used for bathing, hygienic and body cleaning purposes.

⚠ The hot and cold supplies must be of equal pressures.

Installation Instructions

- Prior to installation, inspect the product for transport damages. After it has been installed, no transport or surface damage will be honoured.
- The pipes and the fixture must be installed, flushed and tested as per the applicable standards.
- The plumbing codes applicable in the respective countries must be observed.

Technical Data

Operating pressure:	max. 1 MPa
Recommended operating pressure:	0,1 - 0,5 MPa
Test pressure:	1,6 MPa
	(1 MPa = 10 bar = 147 PSI)
Hot water temperature:	max. 60°C
Thermal disinfection:	70 °C / 4 min

The product is exclusively designed for drinking water!

Symbol description

Do not use silicone containing acetic acid!

Adjustment (see page 5)

To adjust the hot water limiter. Using a hot water limiter in combination with a continuous flow water heater is not recommended.

Dimensions (see page 6)

Flow diagram (see page 7)

Spare parts (see page 8)

XX - Colors
00 - Chrome Plated
34 - Brushed Black Chrome
67 - Matt Black

Special accessories (order as an extra)

seal #98996000 (see page 4)

Cleaning (see page 11)

Operation (see page 10)

- Hansgrohe recommends not to use as drinking water the first half liter of water drawn in the morning or after a prolonged period of non-use.
- After periods of prolonged non-use, but at least every third day, the fittings must be opened with the handle in hot and cold position to prevent stagnation in the connecting lines. let the water run until the water temperature is constant.

Assembly (see page 4)

Sicherheitshinweise

⚠ Bei der Montage müssen zur Vermeidung von Quetsch- und Schnittverletzungen Handschuhe getragen werden.

⚠ Das Produkt darf nur zu Bade-, Hygiene- und Körperreinigungszwecken eingesetzt werden.

⚠ Große Druckunterschiede zwischen den Kalt- und Warmwasseranschlüssen müssen ausgeglichen werden.

Montagehinweise

- Vor der Montage muss das Produkt auf Transportschäden untersucht werden. Nach dem Einbau werden keine Transport- oder Oberflächenschäden anerkannt.
- Die Leitungen und die Armatur müssen nach den gültigen Normen montiert, gespült und geprüft werden.
- Die in den Ländern jeweils gültigen Installationsrichtlinien sind einzuhalten.

Technische Daten

Betriebsdruck:	max. 1 MPa
Empfohlener Betriebsdruck:	0,1 - 0,5 MPa
Prüfdruck:	1,6 MPa
	(1 MPa = 10 bar = 147 PSI)
Heißwassertemperatur:	max. 60°C
Thermische Desinfektion:	70 °C / 4 min

Das Produkt ist ausschließlich für Trinkwasser konzipiert!

Symbolerklärung

Kein essigsäurehaltiges Silikon verwenden!

Justierung (siehe Seite 5)

Einstellen der Warmwasserbegrenzung. In Verbindung mit Durchlauferhitzern ist eine Warmwassersperre nicht zu empfehlen.

Maße (siehe Seite 6)

Durchflussdiagramm (siehe Seite 7)

Servicateile (siehe Seite 8)

XX - Farbcodierung
00 - Chrom
34 - Brushed Black Chrome
67 - Mattschwarz

Sonderzubehör

(nicht im Lieferumfang enthalten)

Dichtung #98996000 (siehe Seite 4)

Reinigung (siehe Seite 11)

Bedienung (siehe Seite 10)

- Hansgrohe empfiehlt, morgens oder nach längeren Stagnationszeiten den ersten halben Liter nicht als Trinkwasser zu verwenden.
- Um eine Stagnation in den Anschlussleitungen zu vermeiden, muss nach längeren Gebrauchspausen, mindestens aber jeden dritten Tag, die Armatur in Griffstellung heiß und kalt geöffnet werden bis eine gleichbleibende Auslauftemperatur erreicht ist.

Montage (siehe Seite 4)

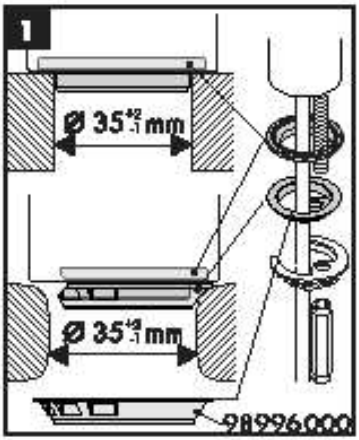
1
Ø 35+1 mm
Ø 35+1 mm
98996000

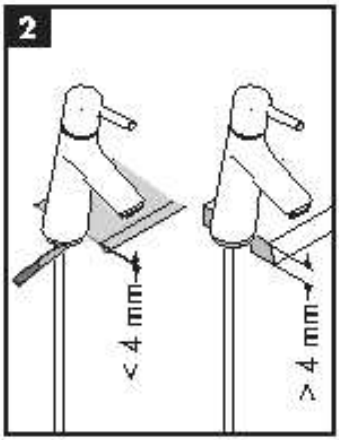
2
< 4 mm
> 4 mm

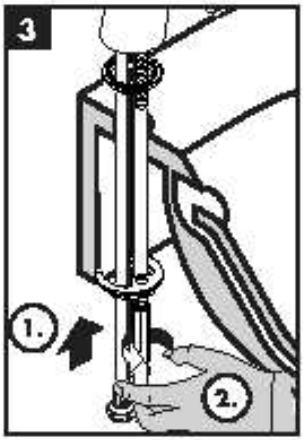
3
1.
2.

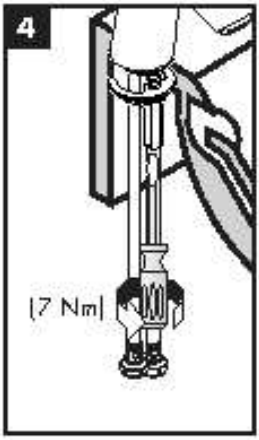
4
17 Nm

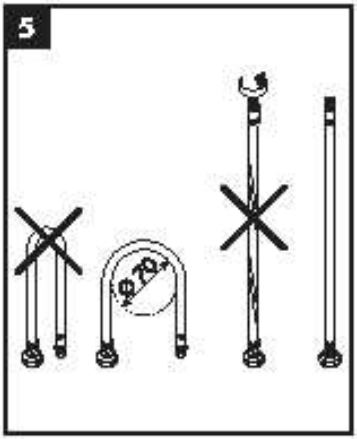
5
≥ 70°

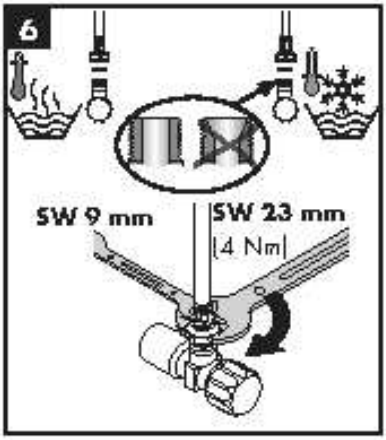
6
SW 9 mm
SW 23 mm
4 Nm

7
SW 22 mm

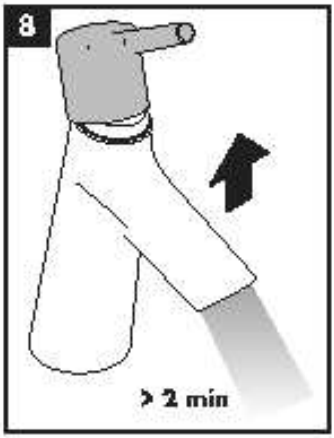
8
> 2 min

9
SW 22 mm
12 Nm

60 °C

10 °C

0,3 MPa

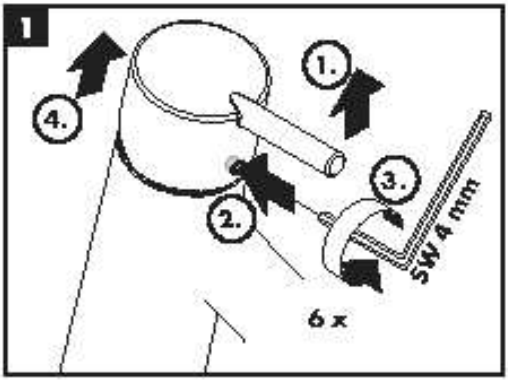
1
4.
1.
3.
2.
SW 4 mm
6 x

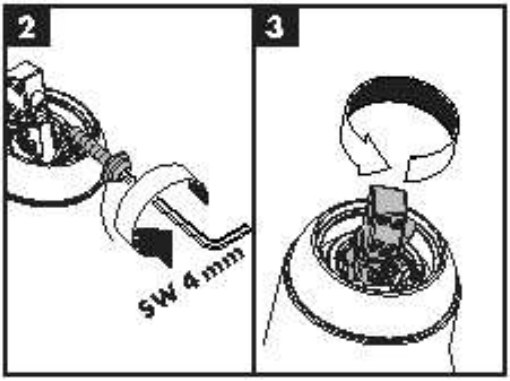
2
SW 4 mm
3

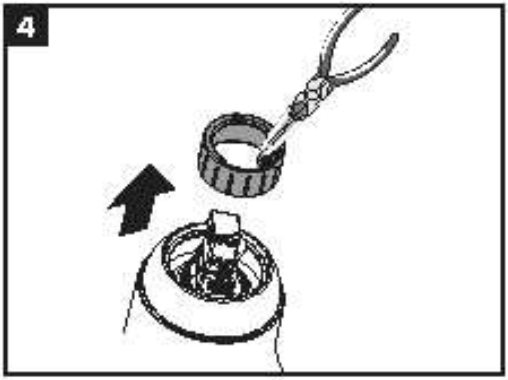
4

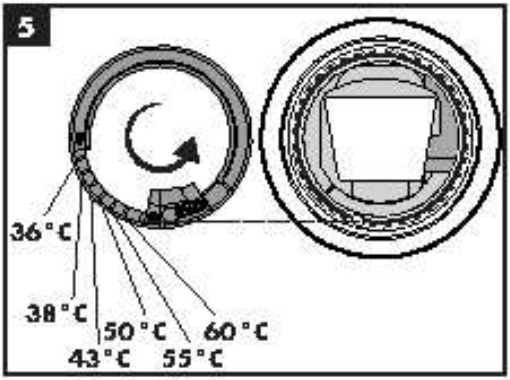
5
36 °C
38 °C
43 °C
50 °C
55 °C
60 °C

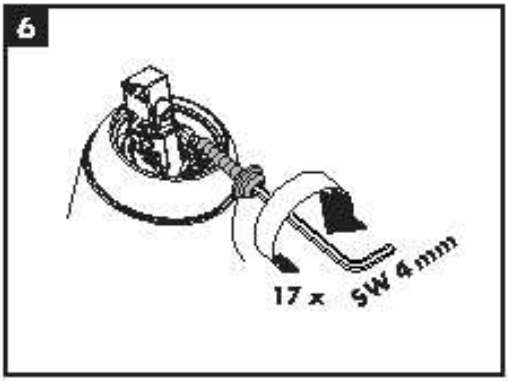
6
17 x SW 4 mm

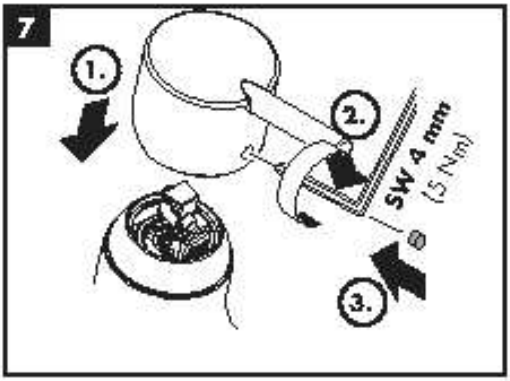
7
1.
2.
SW 4 mm
(5 Nm)
3.

Talis S 80
72012003

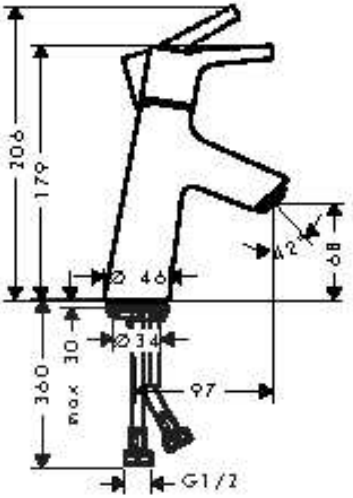

Talis S 100
72021003

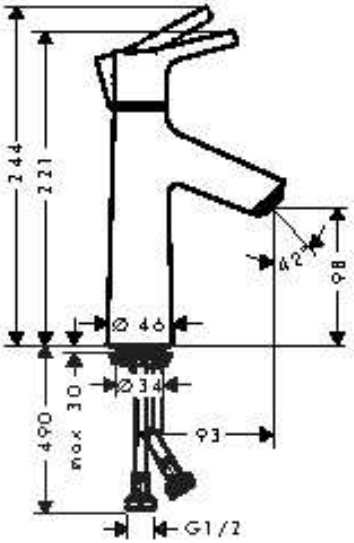

Talis E 80
71702003

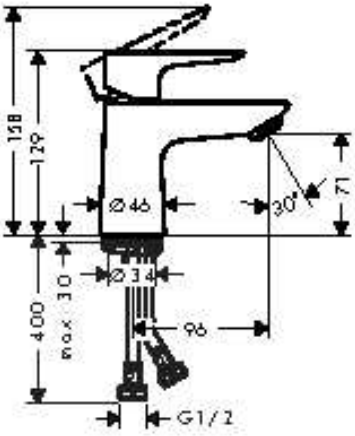

Talis E 110
71712003

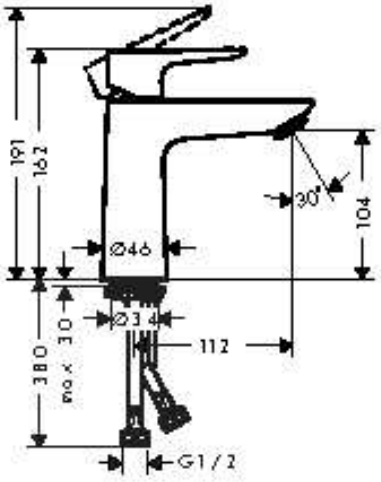

Talla S 80 7201200X3
Talla S 100 7202100X3
Talla E 80 7170200X3
Talla E 110 7171200X3

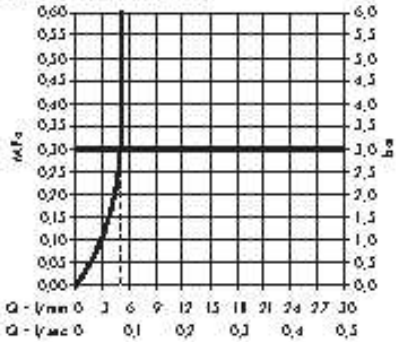

Talis S 80
72012XX3
Talis S 100
72021XX3

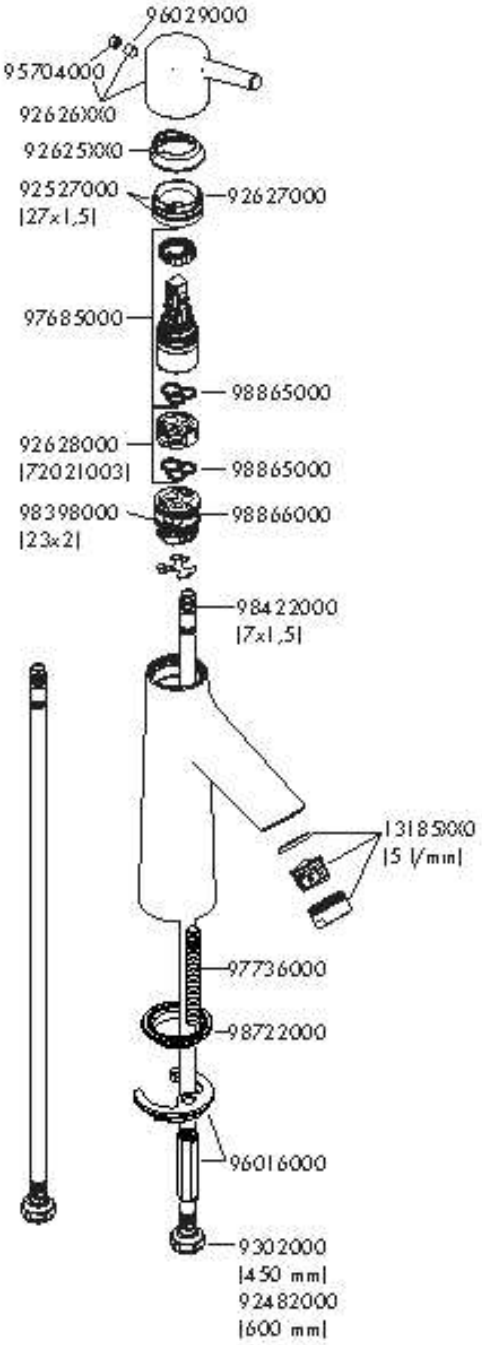

Talis E 80
71702003
Talis E 110
71712XX3

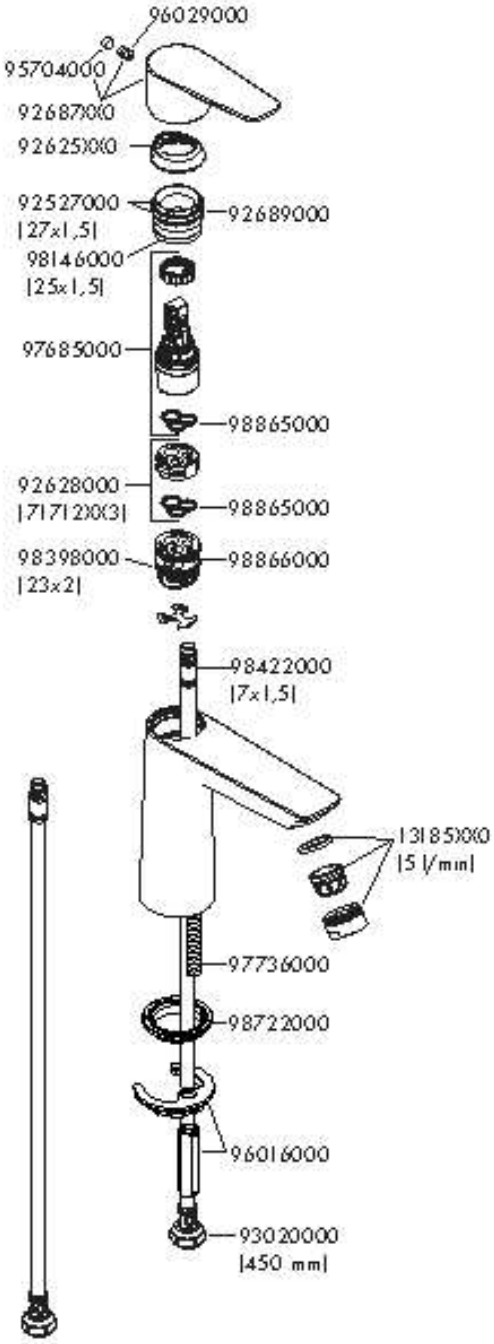



open / öffnen

close / schließen

cold / kalt



hot / warm

EN Cleaning recommendation / Warranty / Contact

DE Reinigungsempfehlung / Garantie / Kontakt

www.hansgrohe.com/
cleaning-recommendation

www.hansgrohe.com/
cleaning-recommendation

www.hansgrohe.com/
cleaning-recommendation

www.hansgrohe.com/
cleaning-recommendation

hansgrohe

Hansgrohe SE · Klaus-Grohe-Str. 5-9 · D-77761 Schiltach · T +49 (0) 7836/51-1212 · F +49 (0) 7836/511440
E-Mail: info@hansgrohe.com · Internet: www.hansgrohe.com

01/2009
9 09916 27