hansgrohe


EN Instructions for use / Assembly instructions 2
DE Gebrauchsanleitung / Montageanleitung 3

**Metris**
31456003

**Metris**
31685003

**Decor**
31965XX3

**Metropol**
32565003

**MySport**
71269000

**Logis**
71605003

**Talis E**
71765XX3

**Talis S**
72605003

**Rebris S**
72667XX3

**Rebris E**
72668XX3

**Taris**
72669XX3



**Metropol**
74565003

**Zasis S**
74616XX3



**Vivanis**
75615XX3



**Finoris**
76615XX3

## Safety Notes

- Gloves should be worn during installation to prevent crushing and cutting injuries.
- The product may only be used for bathing, hygienic and body cleaning purposes.
- The hot and cold supplies must be of equal pressures.

## Installation Instructions

- Prior to installation, inspect the product for transport damages. After it has been installed, no transport or surface damage will be honoured.
- The pipes and the fixture must be installed, flushed and tested as per the applicable standards.
- The plumbing codes applicable in the respective countries must be observed.

## Technical Data

| | |
|---|---|
| Operating pressure: | max. 1 MPa |
| Recommended operating pressure: | 0,1 - 0,5 MPa |
| Test pressure: | 1,6 MPa (1 MPa = 10 bar = 145 PSI) |
| Hot water temperature: | max. 60 °C |
| Thermal disinfection: | 70 °C / 4 min |

The product is exclusively designed for drinking water!

## Symbol description

Do not use silicone containing acetic acid!

**Adjustment** (see page 8)

To adjust the hot water limiter. Using a hot water limiter in combination with a continuous flow water heater is not recommended.

**Dimensions** (see page 4)

**Flow diagram** (see page 5)

free flow

**Spare parts** (see page 9)

XX = Colors
00 = Chrome Plated
14 = Brushed Bronze
34 = Brushed Black Chrome
67 = Matt Black
70 = Matt White
82 = Brushed Nickel
99 = Polished Gold-Optic

**Special accessories** (see page 11)

order as an extra

- extension 25 mm #13595000
- Extension Set 22 mm (when wall is not deep enough) #13597000, #13593000, #15597000

**Cleaning** (see page 12)

**Operation** (see page 4)

| Fault | Cause | Remedy |
|---|---|---|
| Mixer stiff | · Cartridge defective, calcified | · Exchange cartridge |
| Mixer dripping | · Cartridge defective | · Exchange cartridge |
| Hot water temperature too low, no cold water. Instantaneous water heater starts up when cold water is selected. | · Hot water limiter incorrectly set | · Set hot water limiter |
| | · Crossflow | · Exchange cartridge |



**Assembly** (see page 6)

## Sicherheitshinweise

- Bei der Montage müssen zur Vermeidung von Quetsch- und Schnittverletzungen Handschuhe getragen werden.
- Das Produkt darf nur zu Bade-, Hygiene- und Körperreinigungszwecken eingesetzt werden.
- Große Druckunterschiede zwischen den Kalt- und Warmwasseranschlüssen müssen ausgeglichen werden.

## Montagehinweise

- Vor der Montage muss das Produkt auf Transportschäden untersucht werden. Nach dem Einbau werden keine Transport- oder Oberflächenschäden anerkannt.
- Die Leitungen und die Armatur müssen nach den gültigen Normen montiert, gespült und geprüft werden.
- Die in den Ländern jeweils gültigen Installationsrichtlinien sind einzuhalten.

## Technische Daten

| | |
|---|---|
| Betriebsdruck: | max. 1 MPa |
| Empfohlener Betriebsdruck: | 0,1 - 0,5 MPa |
| Prüfdruck: | 1,6 MPa |
| | (1 MPa = 10 bar = 145 PSI) |
| Heißwassertemperatur: | max. 60 °C |
| Thermische Desinfektion: | 70 °C / 4 min |

Das Produkt ist ausschließlich für Trinkwasser konzipiert

## Symbolerklärung

Kein essigsäurehaltiges Silikon verwenden!

**Justierung** (siehe Seite 8)

Einstellen der Warmwasserbegrenzung. In Verbindung mit Durchlauferhitzern ist eine Warmwassersperre nicht zu empfehlen.

**Maße** (siehe Seite 4)

**Durchflussdiagramm** (siehe Seite 5)

freier Durchfluss

**Serviceteile** (siehe Seite 9)

XX – Farbcodierung
00 – Chrom
14 – Brushed Bronze
34 – Brushed Black Chrome
67 – Mattschwarz
70 – Mattweiß
82 – Brushed Nickel
99 – Polished Gold-Optic

**Sonderzubehör** (siehe Seite 11)

nicht im Lieferumfang enthalten

- Verlängerung 25 mm #13595000
- Verlängerung 22 mm (bei geringer Einbautiefe) #13597000, #13593000, #15597000

**Reinigung** (siehe Seite 12)

**Bedienung** (siehe Seite 4)

| Störung | Ursache | Abhilfe |
|---|---|---|
| Armatur schwergängig | · Kartusche defekt, verkalkt | · Kartusche austauschen |
| Armatur tropft | · Kartusche defekt | · Kartusche austauschen |
| Zu niedrige Warmwassertemperatur, kein Kaltwasser. Durchlauferhitzer springt an, wenn Kaltwasser angewählt wird. | · Warmwasserbegrenzung falsch eingestellt | · Warmwasserbegrenzung einstellen |
| | · Kreuzfluss | · Kartusche austauschen |

**Montage** (siehe Seite 6)

**Metris**
31456003



**Metris**
31685003



**Decor**
31965XX3



**Metropol**
32565XX3 / 74565003



**MySport**
71269000



**Logis**
71605003



**Talis E**
71765XX3



**Talis S**
72605XX3



**Rebris S**
72667XX3



**Rebris E**
72668XX3



**Taris**
72669XX3



**Vivanis**
75615XX3



**Zesis S**
74616XX3



**Finoris**
76615XX3



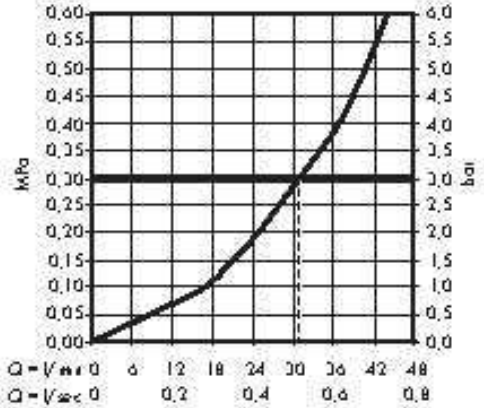
MPa
bar
0,60
0,55
0,50
0,45
0,40
0,35
0,30
0,25
0,20
0,15
0,10
0,05
0,00
6,0
5,5
5,0
4,5
4,0
3,5
3,0
2,5
2,0
1,5
1,0
0,5
0,0
Q = l/min 0 6 12 18 24 30 36 42 48
Q = l/sec 0 0,2 0,4 0,6 0,8

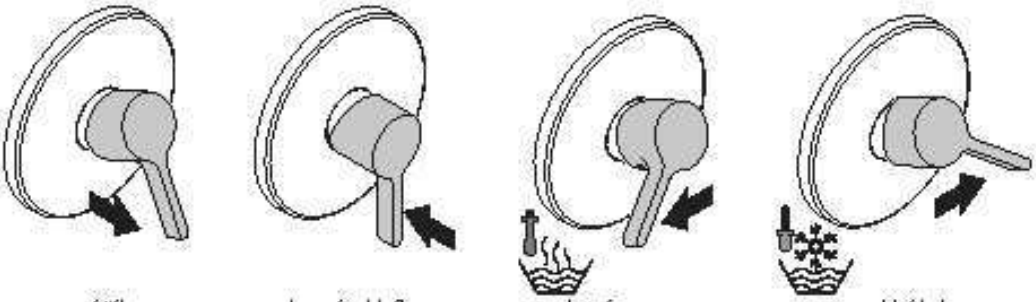
open / öffnen
close / schließen
hot / warm
cold / kalt

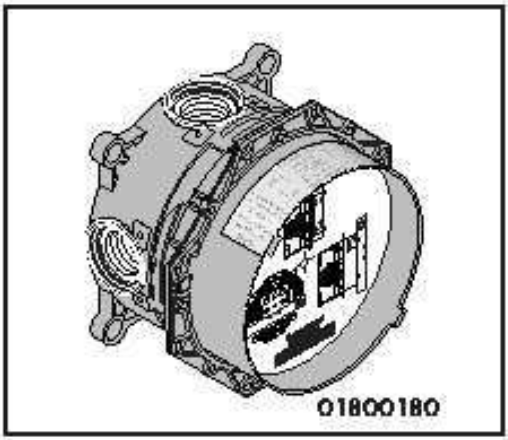
01800180

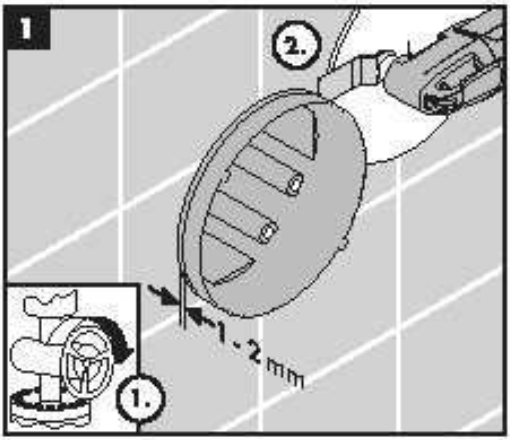
1
2.
1 - 2 mm
1.

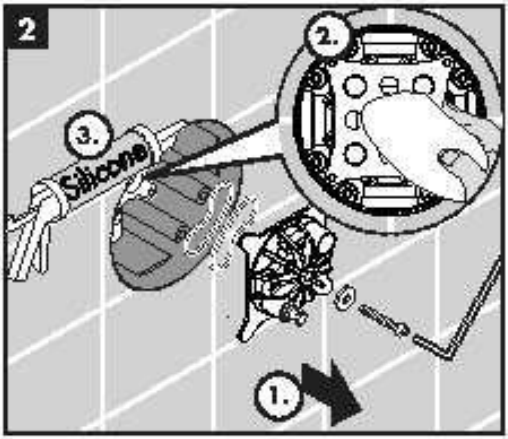
2
2.
3.
Silicone
1.

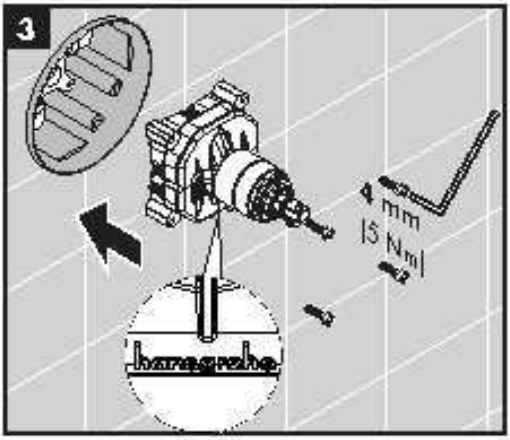
3
4 mm
15 Nm
hansgrohe

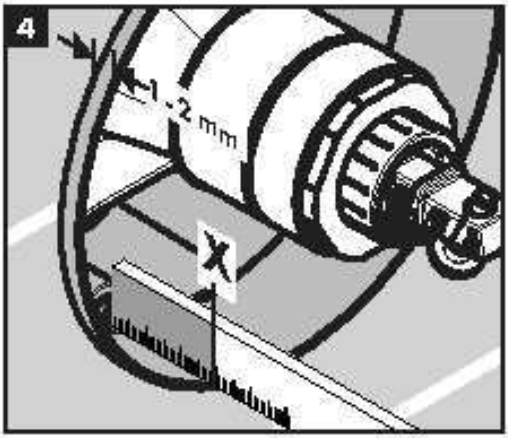
4
1 - 2 mm
X

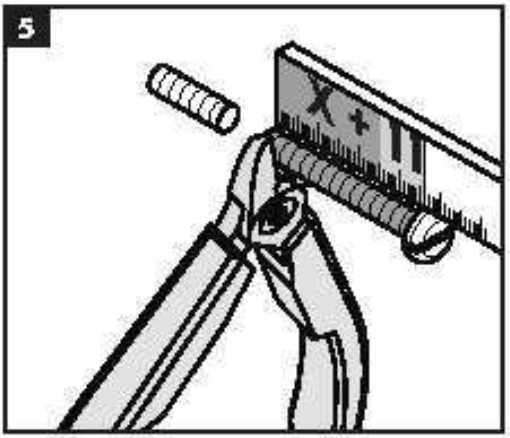
5
X + 11

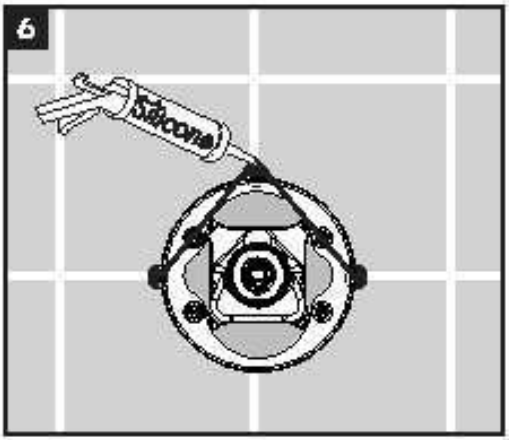


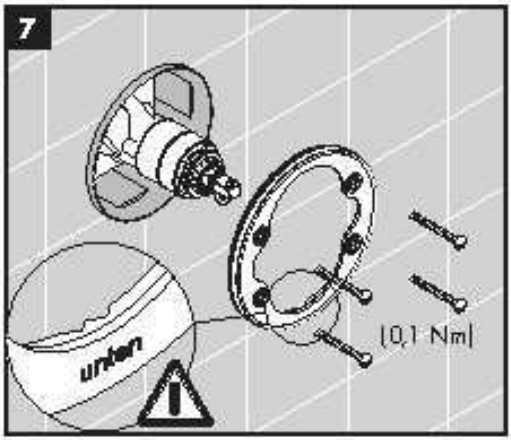


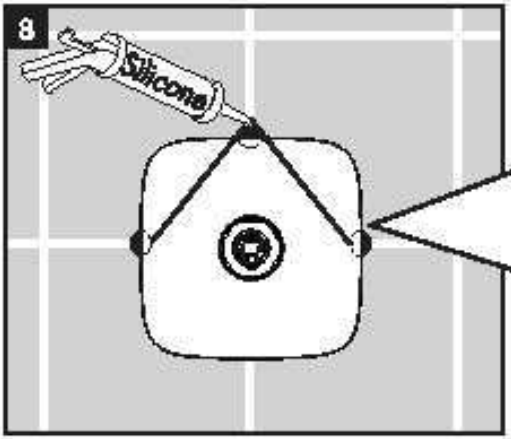


| | |
|---|---|
| **Metris** | 31456003 |
| **Metropol** | 32565XX3 / 74565003 |
| **Logis** | 71605003 |
| **Talis E** | 71765XX3 |
| **Vivanis** | 75615XX3 |
| **Finoris** | 76615XX3 |

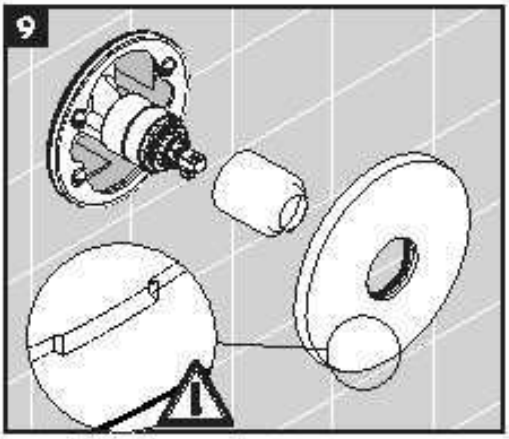


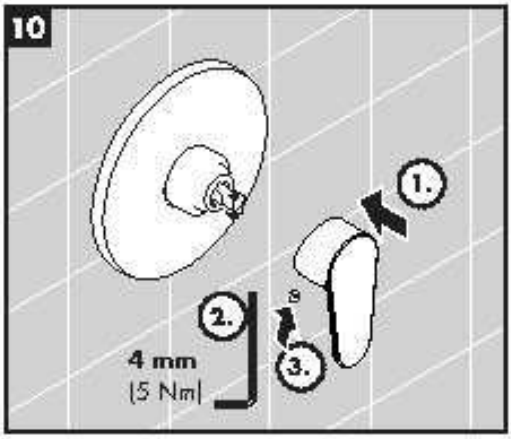

60 °C

10 °C

0,3 MPa

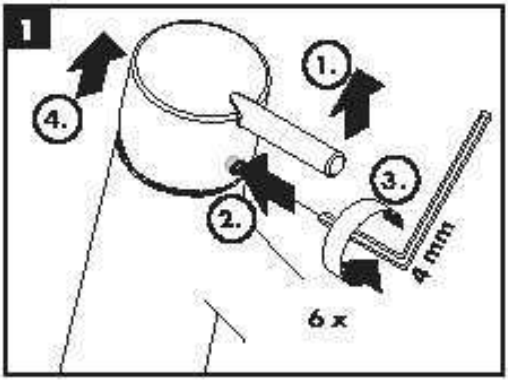
1
4.
1.
3.
2.
4 mm
6 x

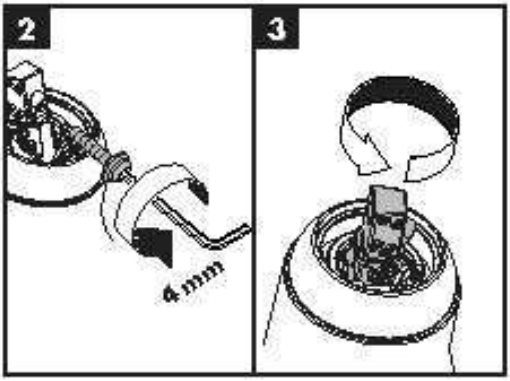
2
4 mm
3

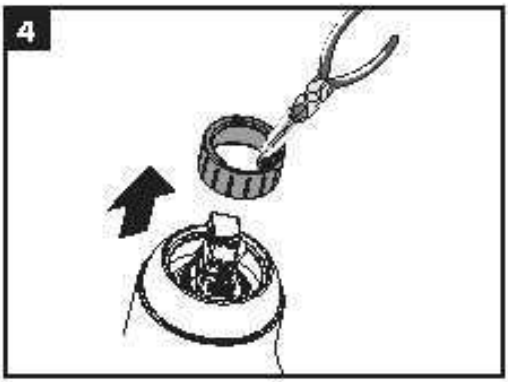
4

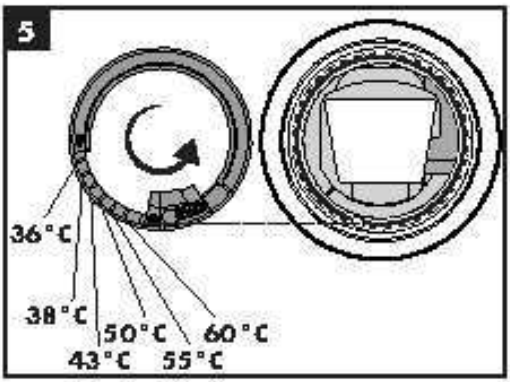
5
36 °C
38 °C
43 °C
50 °C
55 °C
60 °C

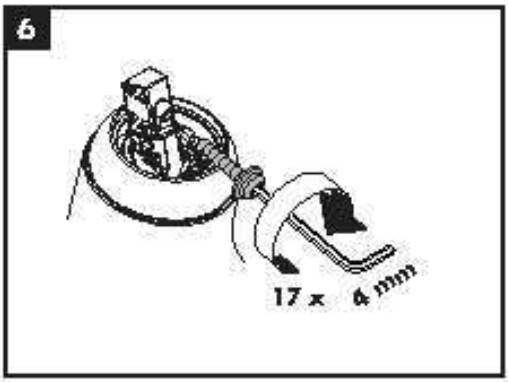
6
17 x 4 mm

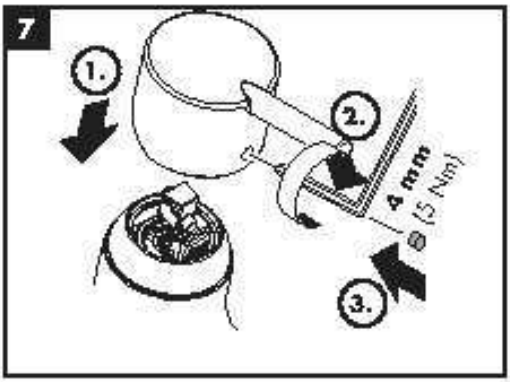
7
1.
2.
4 mm
(5 Nm)
3.

**Metris**
31685003
**Decor**
31965XX3
**MySport**
71269000
**Talis S**
72605XX3
**Rebris S**
72667XX3
**Taris**
72669XX3
**Rebris E**
72668XX3
**Zesis S**
74616XX3

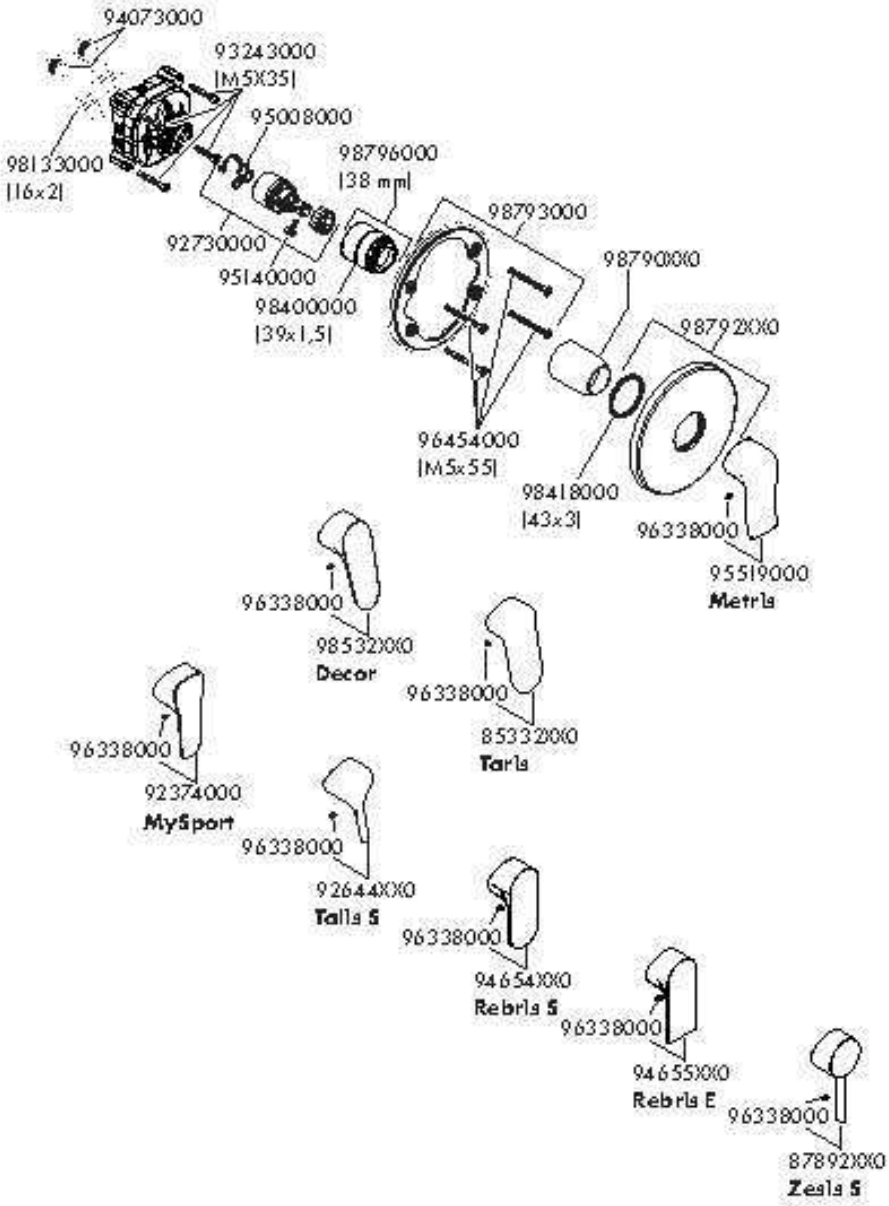

**Metris**
31456003
**Logis**
71605003
**Talis E**
71765XX3

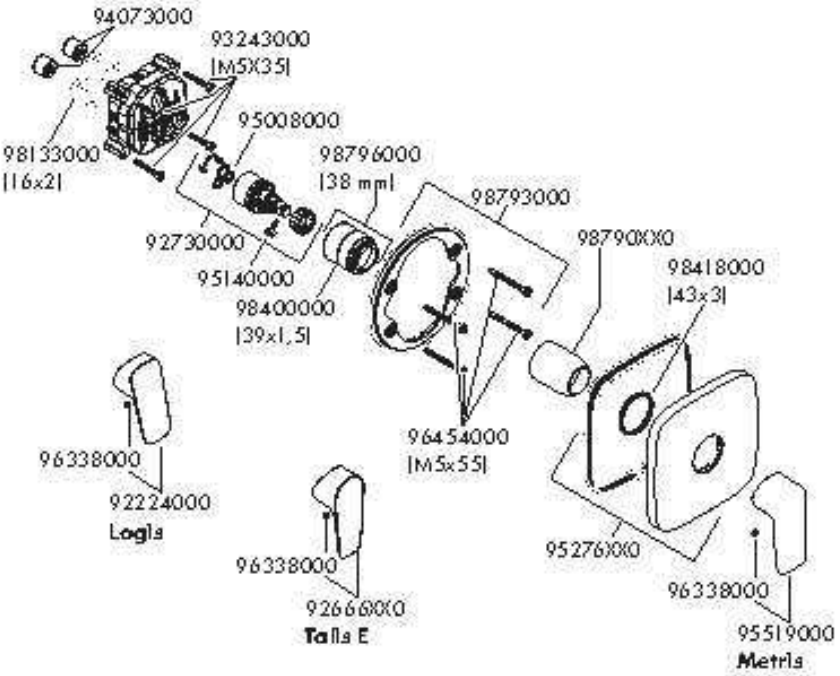


**Metropol**
32565XX3
74565003

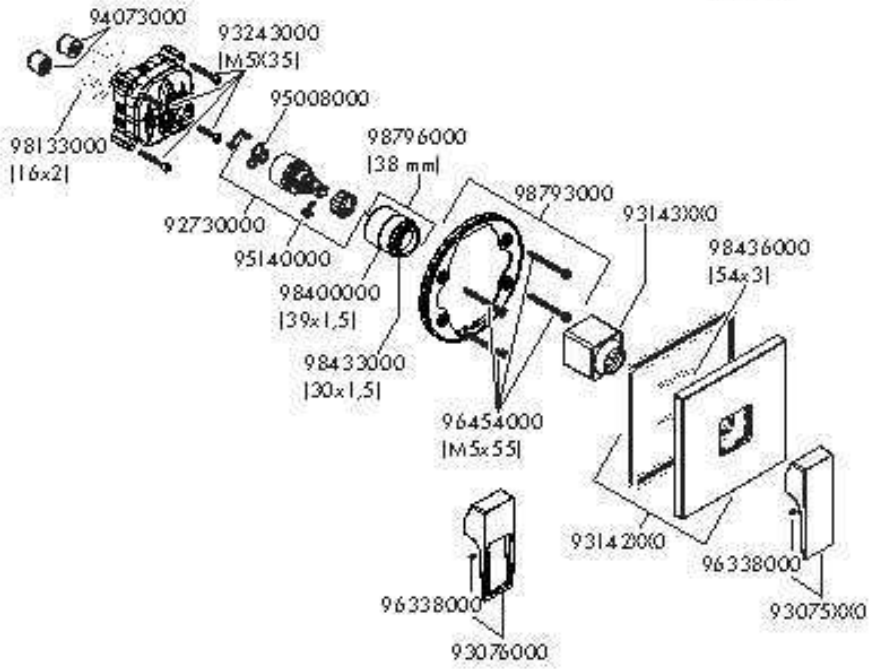

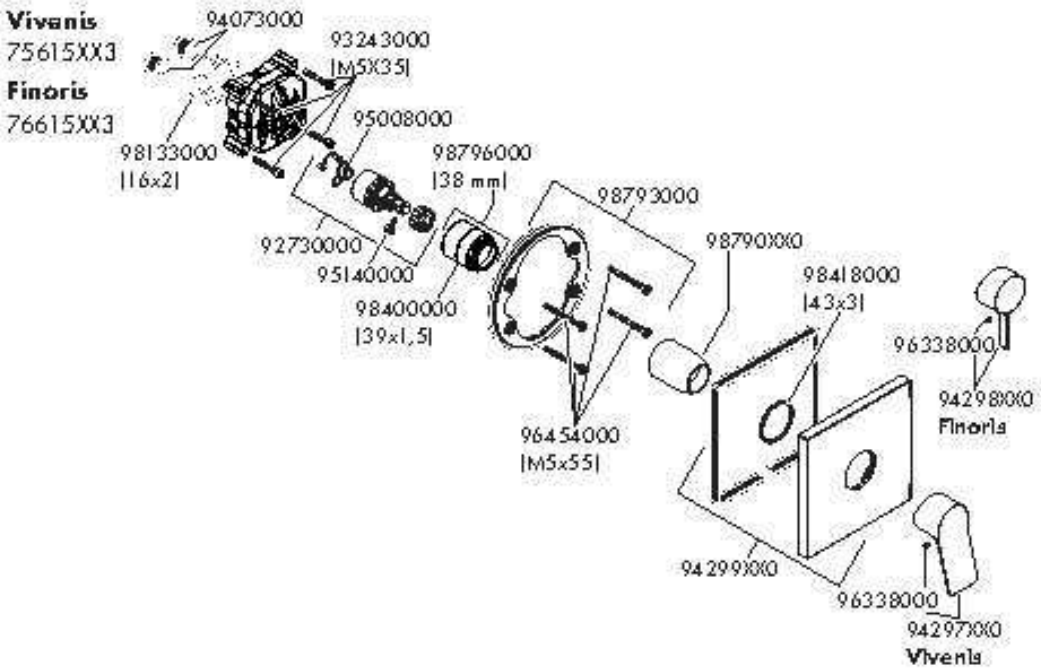


**Ecos**
14630000
**MySport**
71269000
**Metris S**
31665XX3
**Talis S**
72605XX3
**Metris**
31685003
**Rebris S**
72667XX3
**Decor**
31965XX3
31965223
**Rebris E**
72668XX3
**Novus**
71065003
**Zesis S**
74616XX3




**Metropol**
32565XX3
74565003
**Vivanis**
75615XX3
**Finoris**
76615XX3

**Metris**
31456003
**Logis**
71605003
**Talis E**
71765XX3

www.hansgrohe.com/cleaning-recommendation

*www.hansgrohe.com/warranty

EN Cleaning recommendation / Warranty / Contact

DE Reinigungsempfehlung / Garantie / Kontakt



hansgrohe
Hansgrohe SE · Klaus-Grohe-Str. 5 - 9 · D-77761 Schiltach · T +49 (0) 7836/51-1212 · F +49 (0) 7836/511660
E-Mail: info@hansgrohe.com · Internet: www.hansgrohe.com

04/2025
96041111