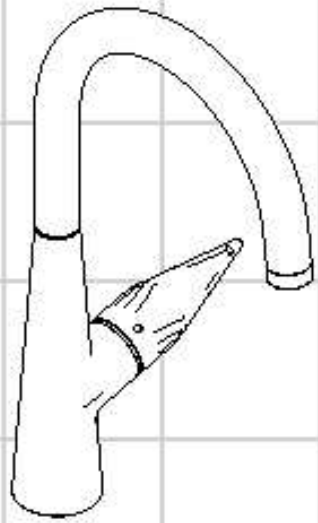
hansgrohe

EN Instructions for use / assembly instructions 2
DE Gebrauchsanleitung / Montageanleitung 3



Talis S 260
72810003

Safety Notes

⚠ Gloves should be worn during installation to prevent crushing and cutting injuries.

⚠ The hot and cold supplies must be of equal pressures.

Installation Instructions

- Prior to installation, inspect the product for transport damages. After it has been installed, no transport or surface damage will be honoured.
- The pipes and the fixture must be installed, flushed and tested as per the applicable standards.
- The plumbing codes applicable in the respective countries must be observed.

Technical Data

Operating pressure:	max. 1 MPa
Recommended operating pressure:	0,1 - 0,5 MPa
Test pressure:	1,6 MPa
(1 MPa = 10 bar = 147 PSI)	
Hot water temperature:	max. 70 °C
Recommended hot water temp.:	65 °C
Thermal disinfection:	max. 70 °C / 4 min

The product is exclusively designed for drinking water!

Symbol description

Do not use silicone containing acetic acid!

Adjustment (see page 8)
To adjust the hot water limiter. Using a hot water limiter in combination with a continuous flow water heater is not recommended.

Dimensions (see page 9)

Flow diagram (see page 9)

Operation (see page 10)
Hansgrohe recommends not to use as drinking water the first half liter of water drawn in the morning or after a prolonged period of non-use.

Spare parts (see page 11)

Cleaning (see page 12)

Assembly see page 4

⚠ Sicherheitshinweise

⚠ Bei der Montage müssen zur Vermeidung von Quetsch- und Schnittverletzungen Handschuhe getragen werden.

⚠ Große Druckunterschiede zwischen den Kalt- und Warmwasseranschlüssen müssen ausgeglichen werden.

Montagehinweise

- Vor der Montage muss das Produkt auf Transportschäden untersucht werden. Nach dem Einbau werden keine Transport- oder Oberflächenschäden anerkannt.
- Die Leitungen und die Armatur müssen nach den gültigen Normen montiert, gespült und geprüft werden.
- Die in den Ländern jeweils gültigen Installationsrichtlinien sind einzuhalten.

Technische Daten

Betriebsdruck:	max. 1 MPa
Empfohlener Betriebsdruck:	0,1 - 0,5 MPa
Prüfdruck:	1,6 MPa
(1 MPa = 10 bar = 147 PSI)	
Heißwassertemperatur:	max. 70 °C
Empfohlene Heißwassertemperatur:	65 °C
Thermische Desinfektion:	max. 70 °C / 4 min

Das Produkt ist ausschließlich für Trinkwasser konzipiert!

Symbolerklärung



Kein essigsäurehaltiges Silikon verwenden!



Justierung (siehe Seite 8)
Einstellen der Warmwasserbegrenzung. In Verbindung mit Durchlauferhitzern ist eine Warmwassersperre nicht zu empfehlen.



Maße (siehe Seite 9)



Durchflussdiagramm
(siehe Seite 9)



Bedienung (siehe Seite 10)
Hansgrohe empfiehlt, morgens oder nach längeren Stagnationszeiten den ersten halben Liter nicht als Trinkwasser zu verwenden.

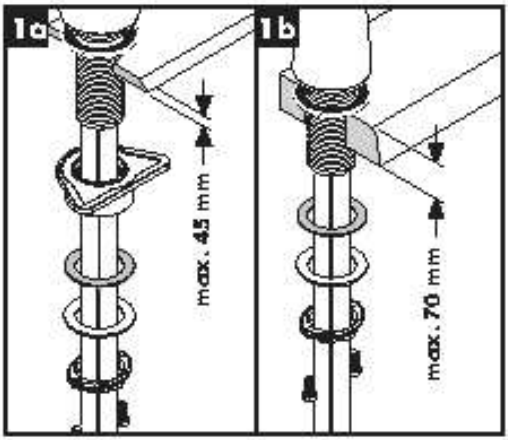


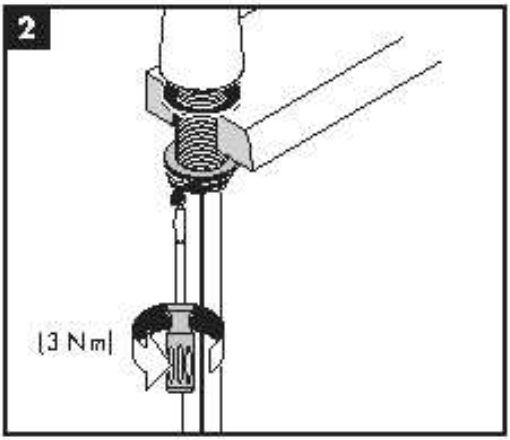
Serviceteile (siehe Seite 11)

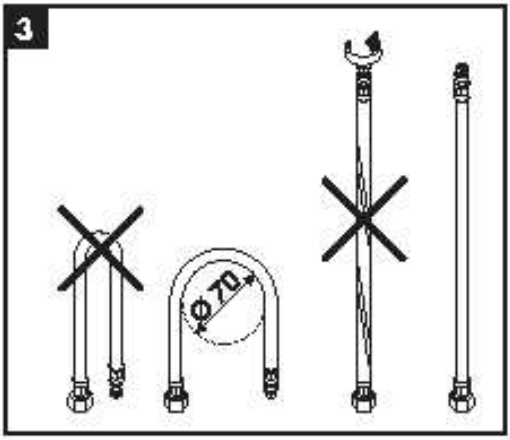


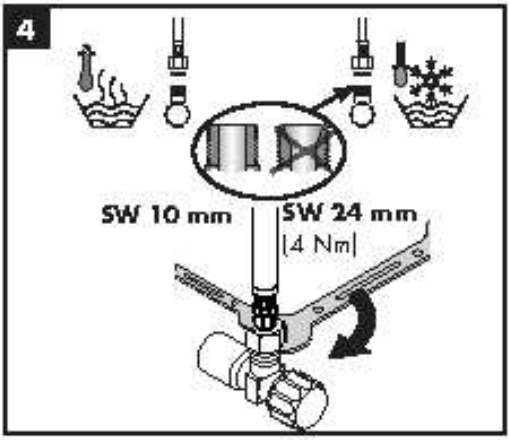
Reinigung (siehe Seite 12)

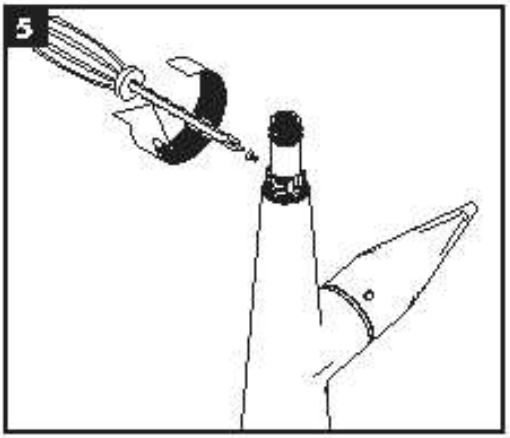
Montage siehe Seite 4

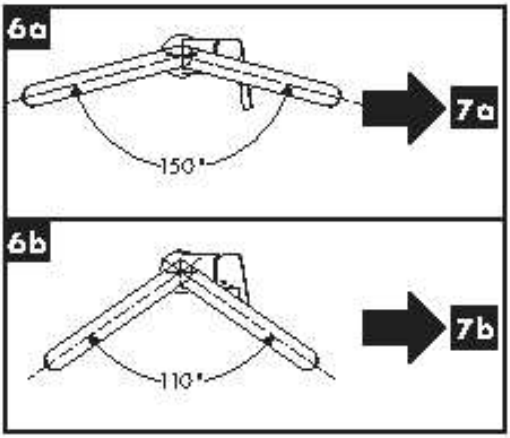

1a
max. 45 mm
1b
max. 70 mm

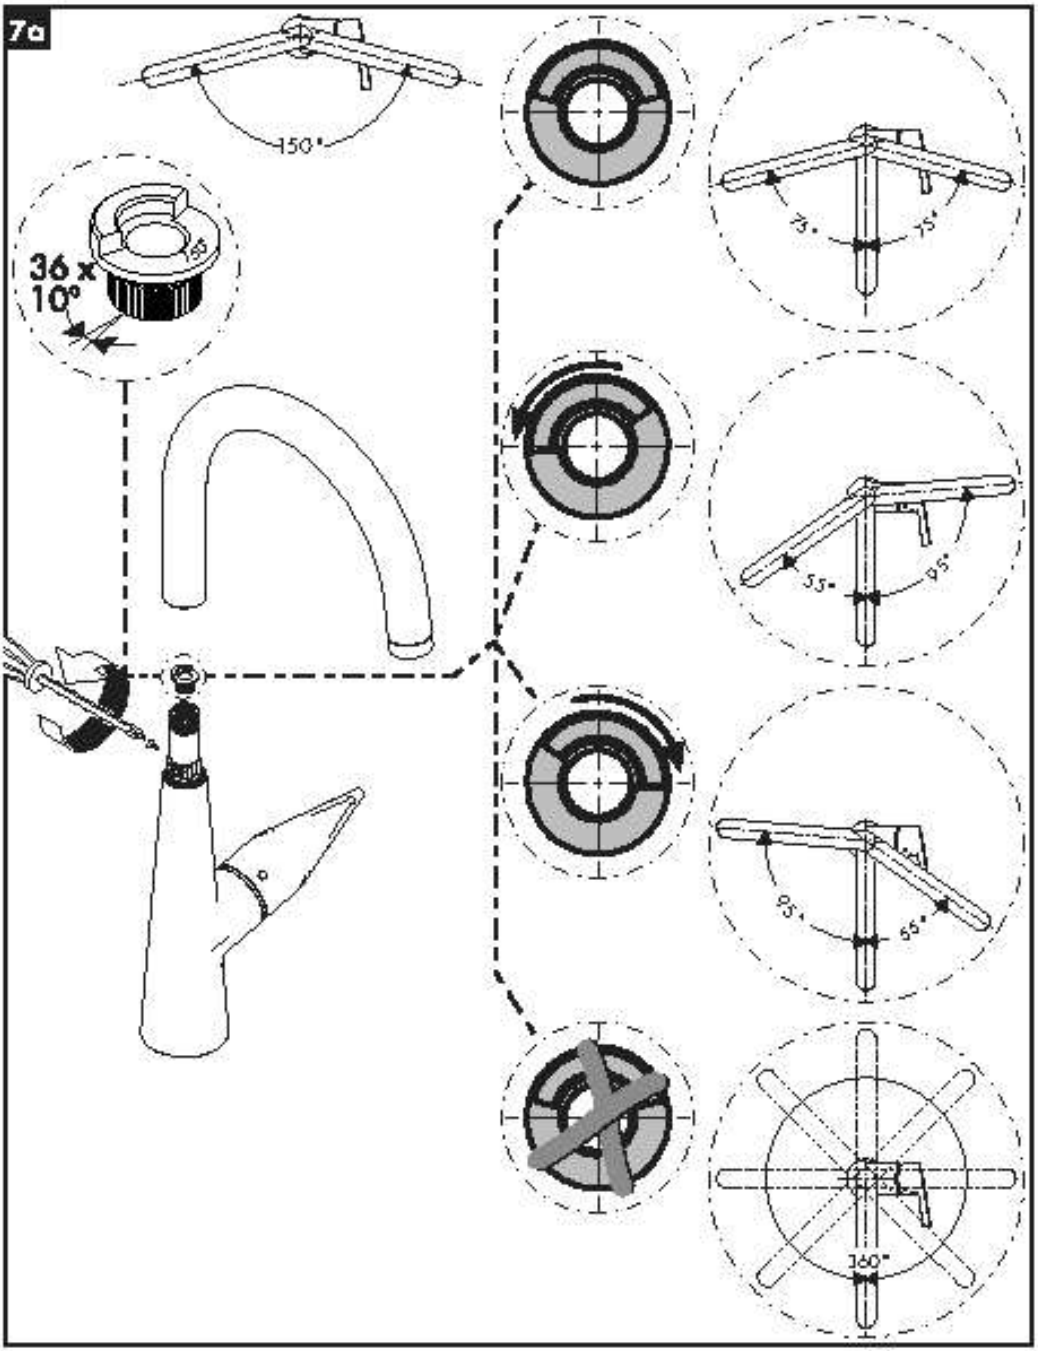

2
(3 Nm)

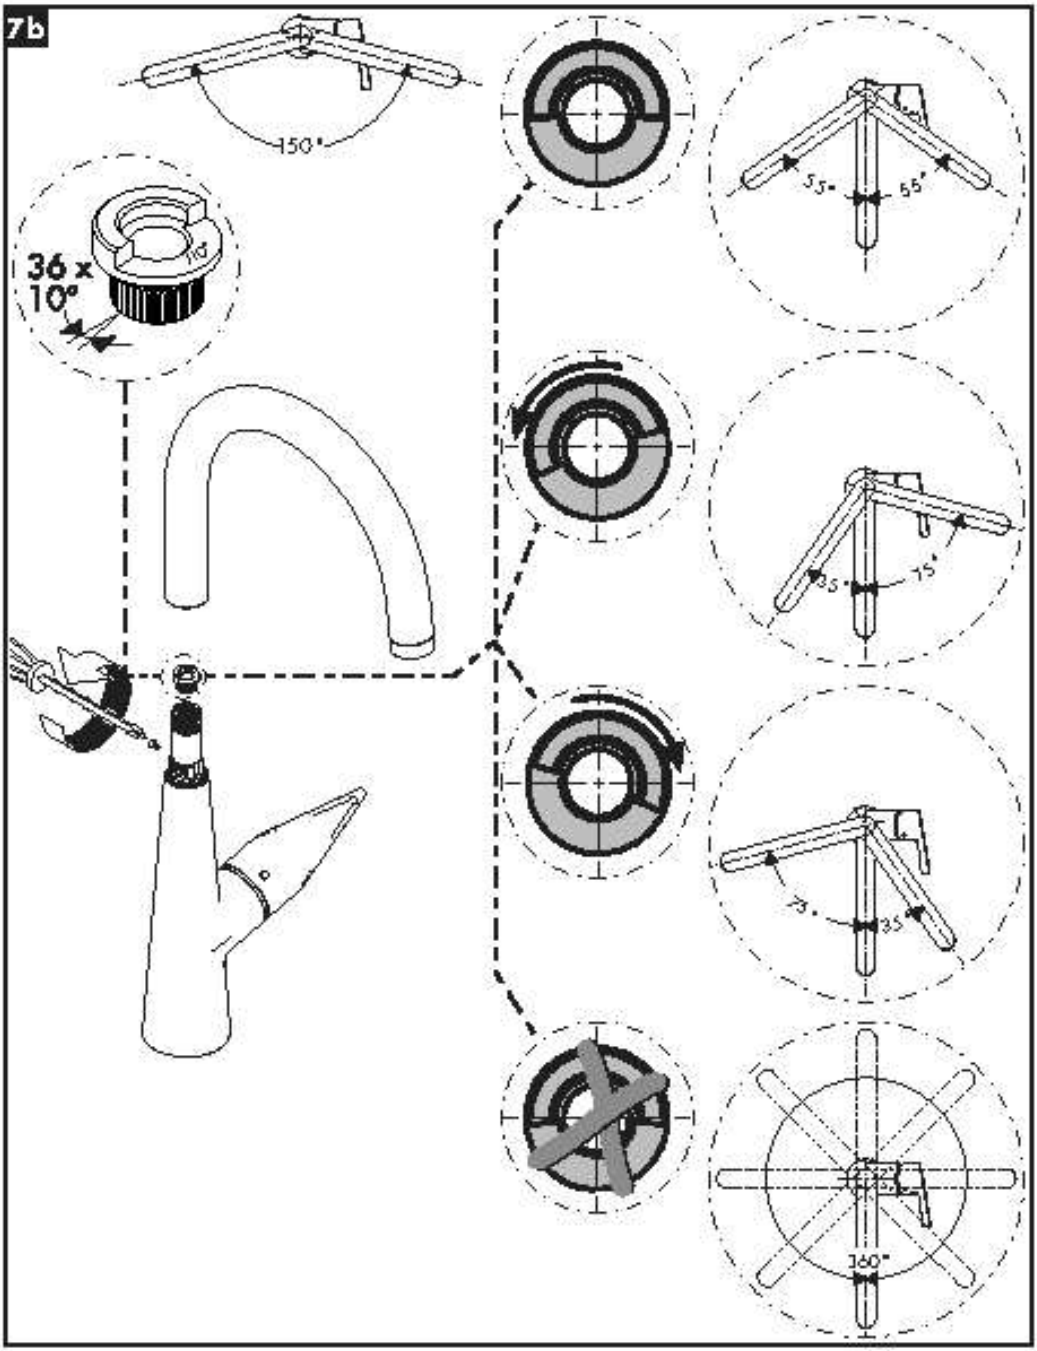

3
Ø 70

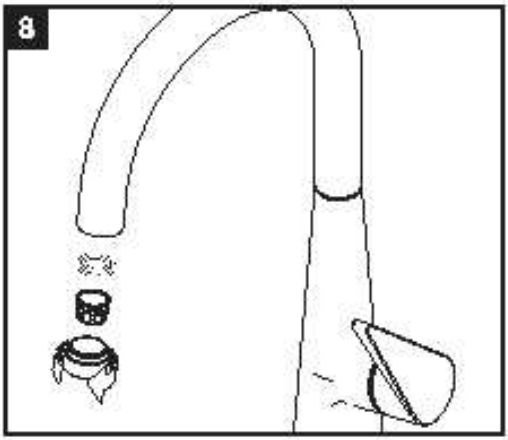

4
SW 10 mm
SW 24 mm
(4 Nm)

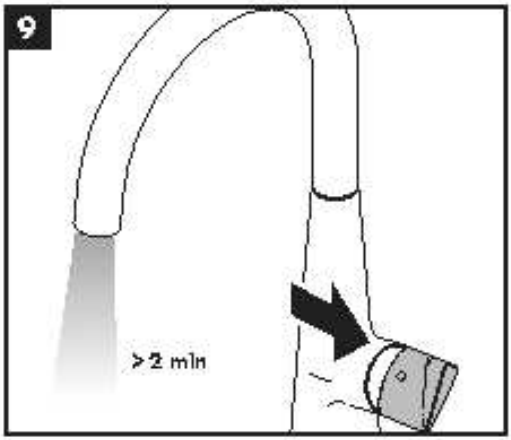

5

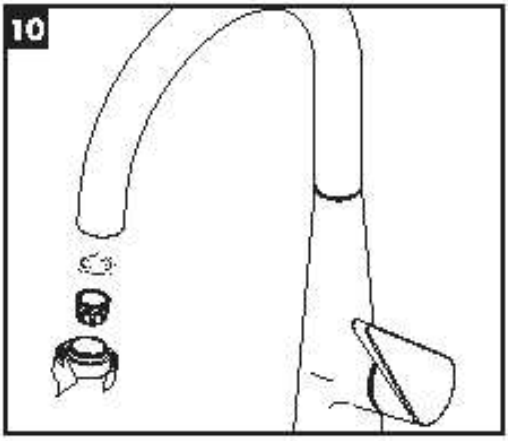

6a
150°
7a
6b
110°
7b


7a
150°
36 x
10°
Ø35
73°
75°
55°
95°
93°
55°
360°


7b
150°
36 x
10°
55°
55°
35°
75°
75°
35°
360°


8

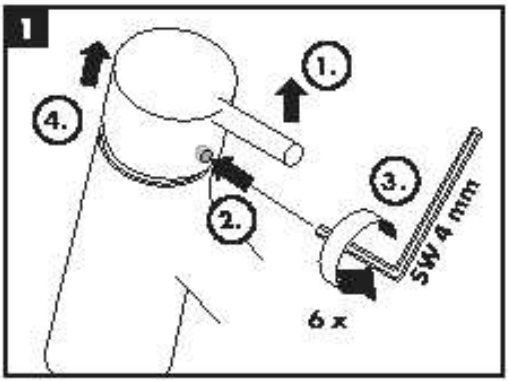

9
> 2 min

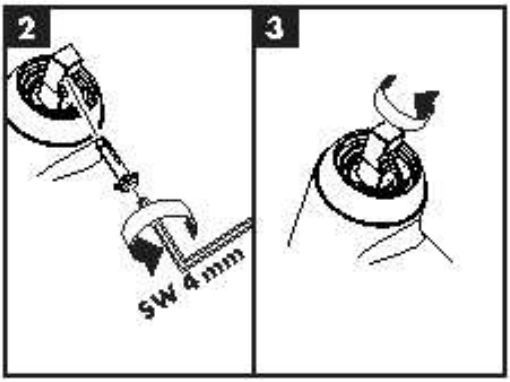

10

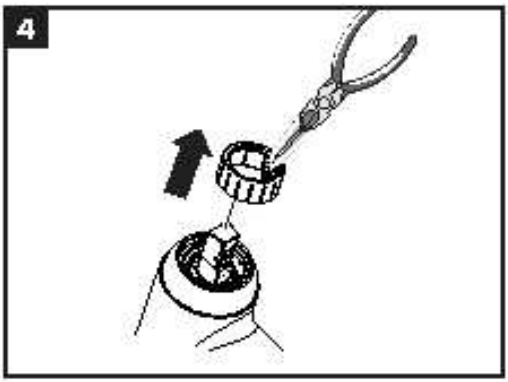

60 °C

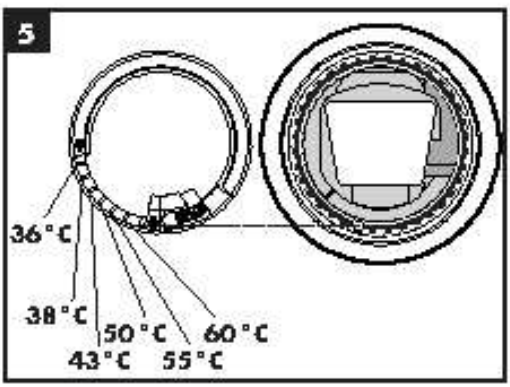

10 °C

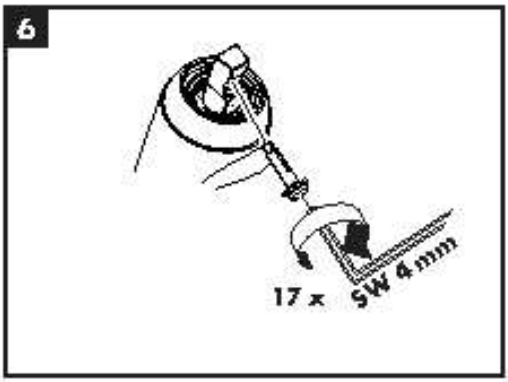

0,3 MPa

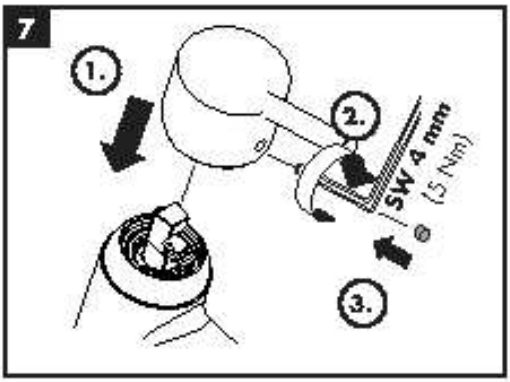

1
4.
1.
2.
3.
SW 4 mm
6 x


2
SW 4 mm
3

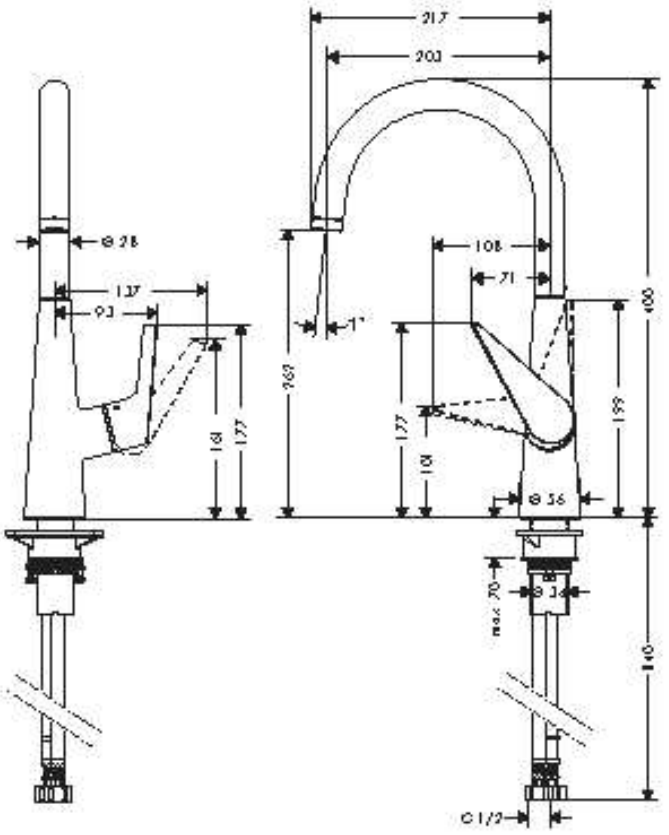

4

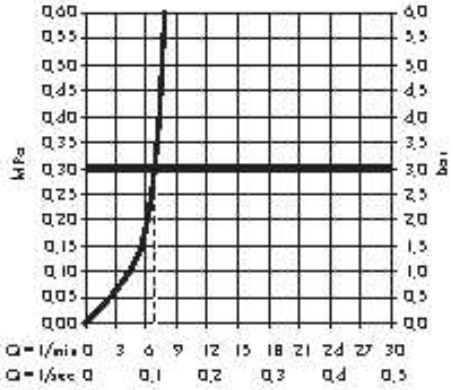

5
36 °C
38 °C
43 °C
50 °C
55 °C
60 °C


6
17 x
SW 4 mm

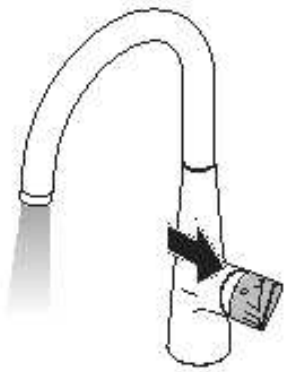

7
1.
2.
SW 4 mm
(5 Nm)
3.

Talis S 260
72810003

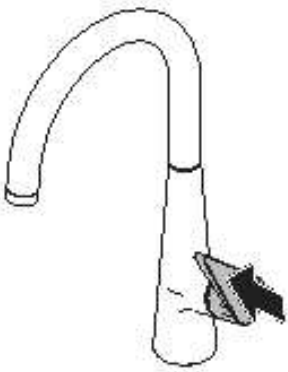








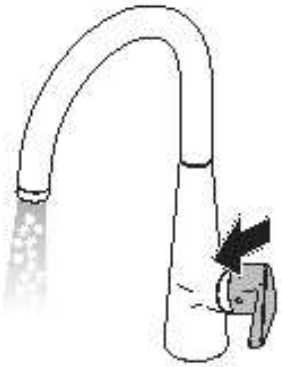
open / öffnen



close / schließen

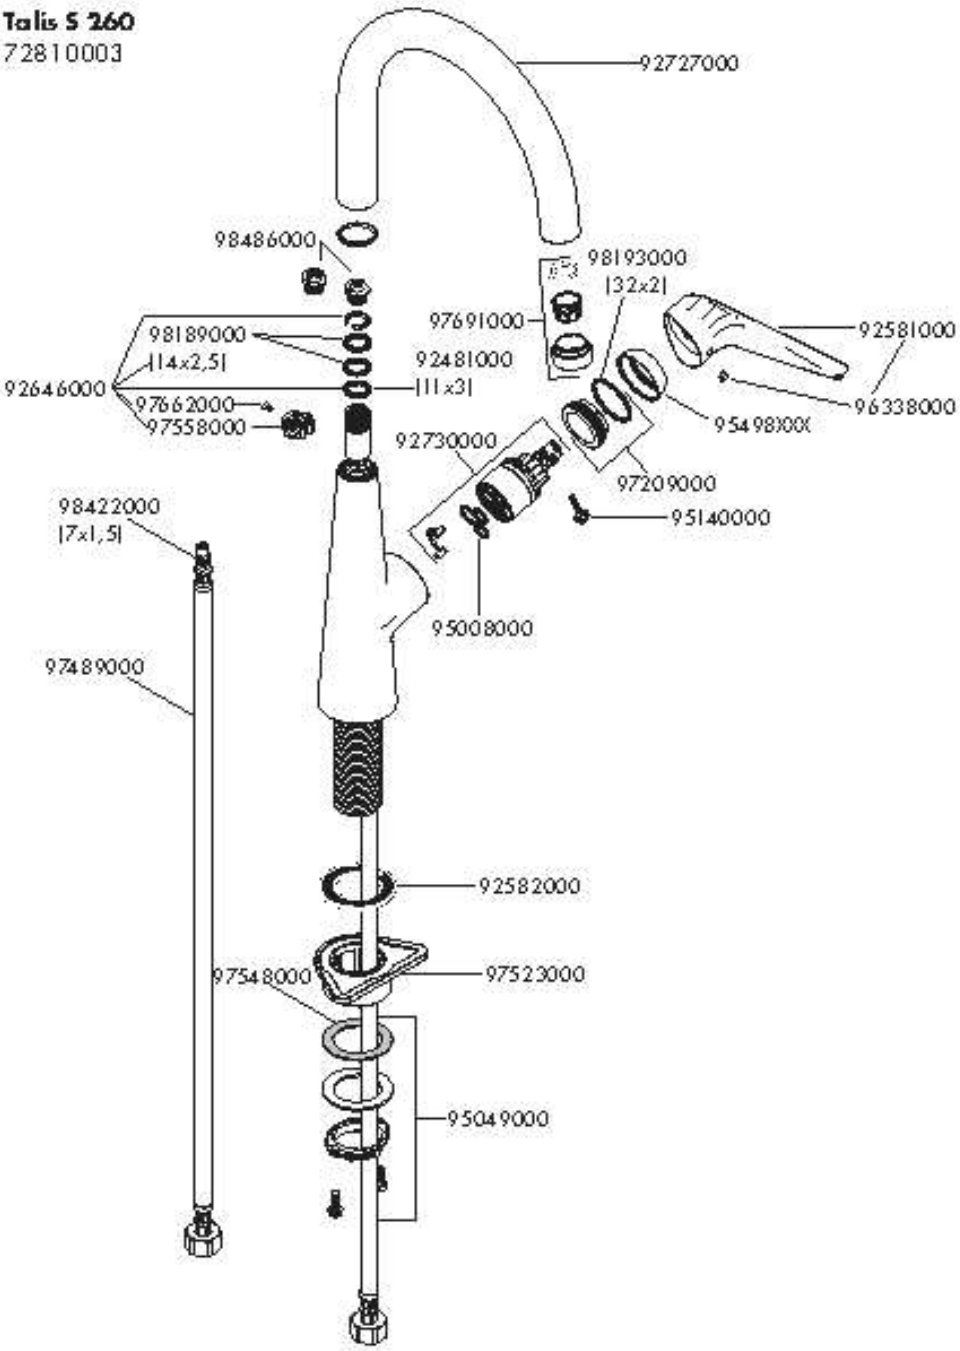


hot / warm



cold / kalt

Talis S 260
72810003



EN Cleaning recommendation / Warranty / Contact

DE Reinigungsempfehlung / Garantie / Kontakt

www.hansgrohe.com/
cleaning-recommendation



www.hansgrohe.com/
cleaning-recommendation



www.hansgrohe.com/
cleaning-recommendation



www.hansgrohe.com/
cleaning-recommendation

hansgrohe

Hansgrohe SE · Klaus-Grohe-Str. 5 · 9 · D-77761 Schiltach · T +49 (0) 7836/51-1212 · F +49 (0) 7836/511440
E-Mail: info@hansgrohe.com · Internet: www.hansgrohe.com

06/2014
9 01 259 31