



EN Assembly instructions

DE Montageanleitung

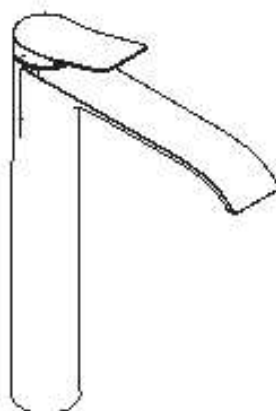


Vivanis 250

75040XX9 / 75042XX3 / 75045XX3



Vivanis 110

75020XX9 / 75022XX3 / 75024XX3






Vivanis 80






75010XX9 / 75012XX3



EN 1717 | EN 806 | DIN 1988


	P max. 1 MPa (10 bar)	0,1 - 0,5 MPa (1 - 5 bar)	
	T max. 60 °C	< 50 °C	
	V	1,5 GPM 00000XX3 0,1 MPa (1 bar) ≈ 3 l/min 0,3 MPa (3 bar) ≈ 5 l/min 1,0 GPM 00000XX9 0,1 MPa (1 bar) ≈ 2,4 l/min 0,3 MPa (3 bar) ≈ 3,5 l/min	

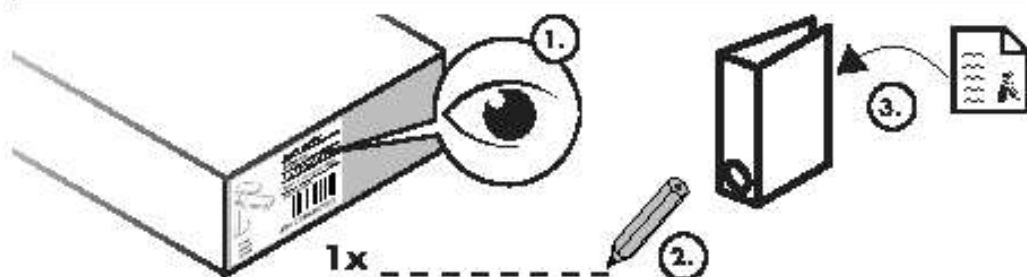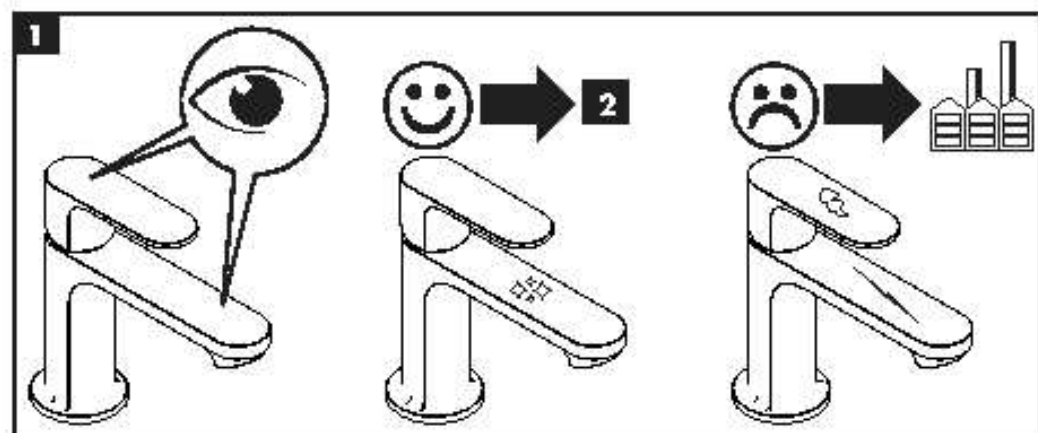

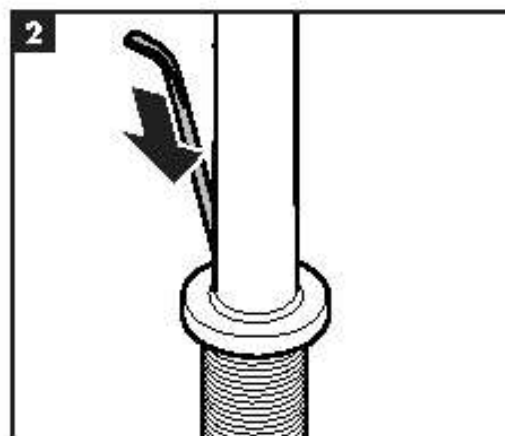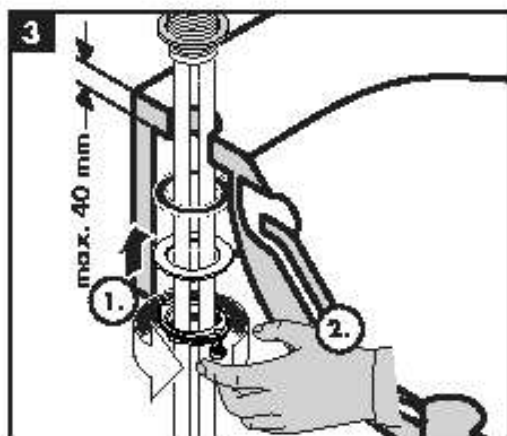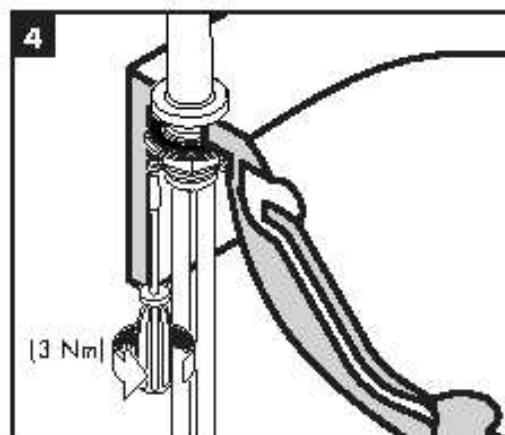
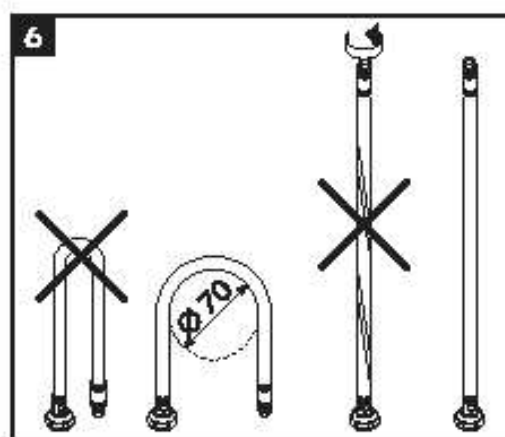
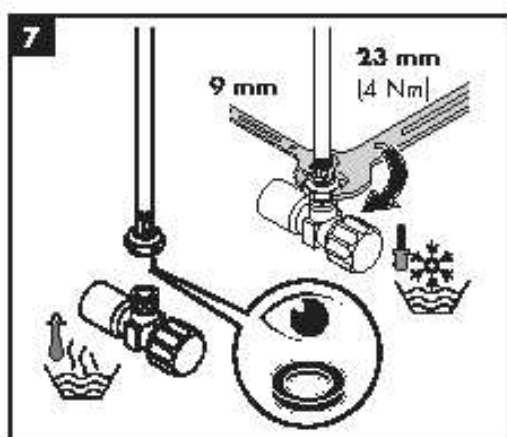




www.hansgrohe.com/search



* www.hansgrohe.com/warranty



Special Text for AUS

This product is in compliance with the lead free requirements of the clause A5G4 of National Construction Code (NCC) 2022 Volume Three - Plumbing Code of Australia.

hansgrohe

Hansgrohe - Australia S. P. - 077761 Schlach - Telefon +49 (0) 71 36/51-1212 - Telefax +49 (0) 71 36/51-1440
E-Mail: info@hansgrohe.com - Internet: www.hansgrohe.com

01/2016
9-07156-07