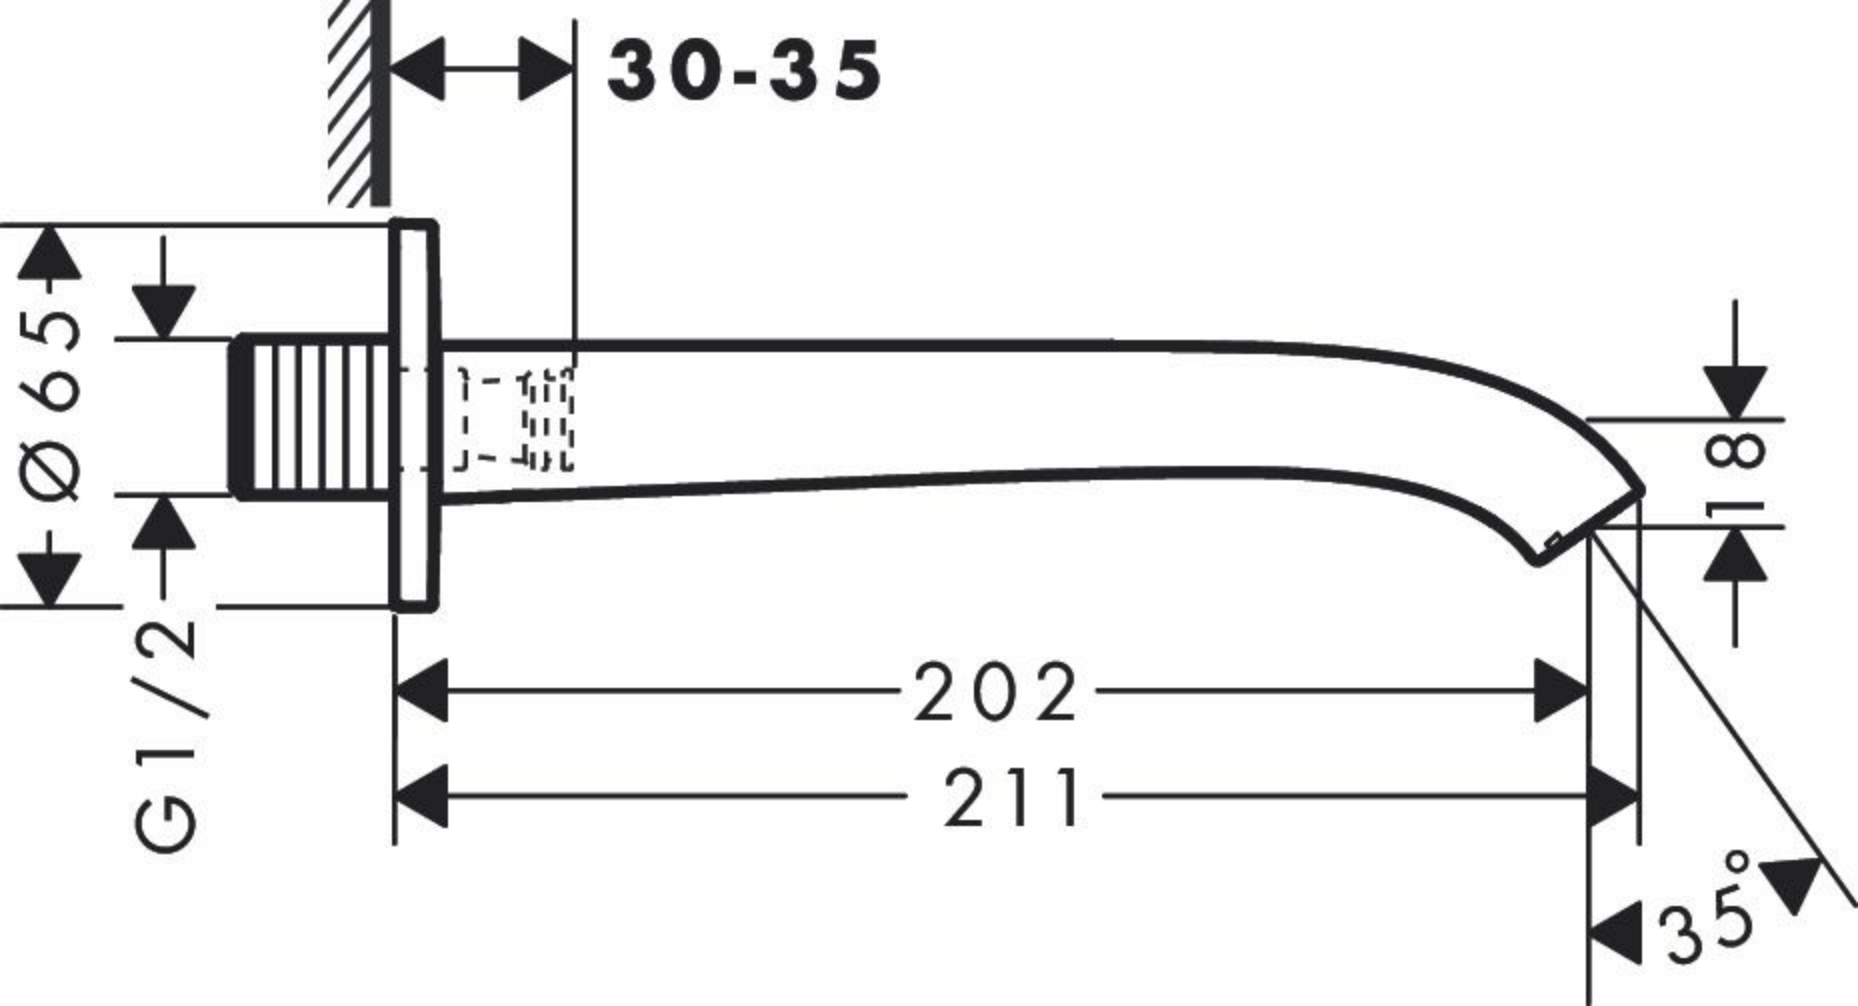
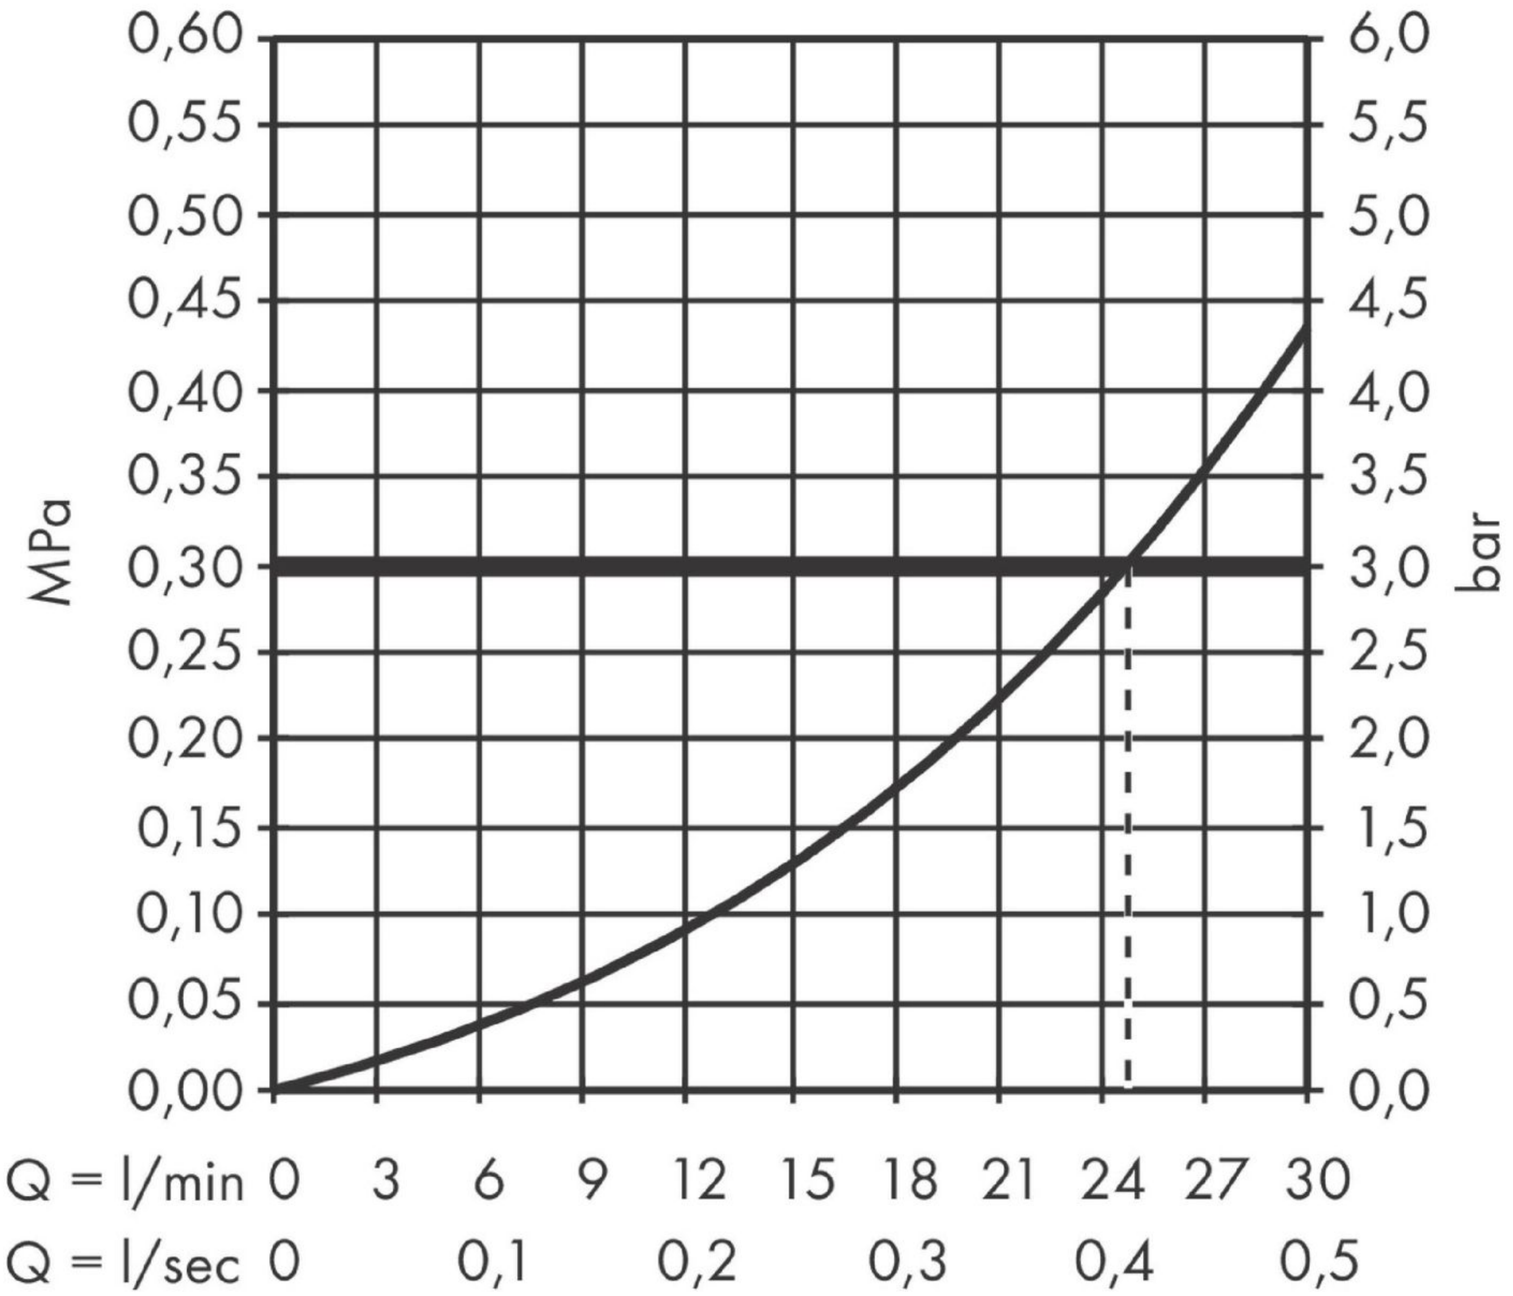

30-35
Ø65
G1/2
202
211
18
35°



The consumption was measured in combination with the appropriate fittings (thermostat/mixer/ in-wall valve) to reflect actual application in practice.