


EN Instructions for use / Assembly instructions

DE Gebrauchsanleitung / Montageanleitung

2

3

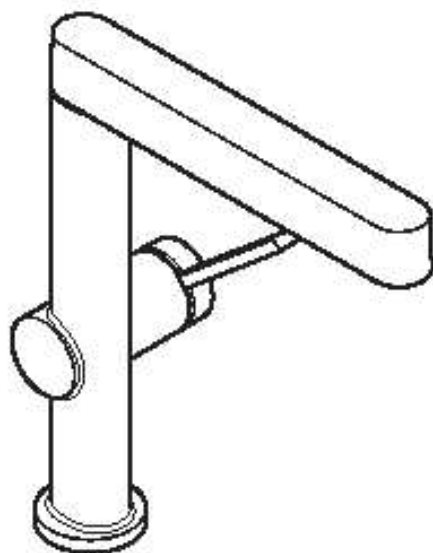

Finoris 230 2jet
76063XX3 / 76063XX9

**Safety Notes**

- ⚠️ Gloves should be worn during installation to prevent crushing and cutting injuries.
- ⚠️ The product may only be used for bathing, hygienic and body cleaning purposes.
- ⚠️ The hot and cold supplies must be of equal pressures.

Installation Instructions

- Prior to installation, inspect the product for transport damages. After it has been installed, no transport or surface damage will be honoured.
- The pipes and the fixture must be installed, flushed and tested as per the applicable standards.
- The plumbing codes applicable in the respective countries must be observed.
- The drain valve may only be installed in basins with an overflow opening.
- The drain valve must only be used as intended. It is not allowed to attach other objects to the drain valve, for example a semipedestal.

Technical Data

Operating pressure:	max. 1 MPa
Recommended operating pressure:	0,1 - 0,5 MPa
Test pressure:	1,6 MPa
	11 MPa - 10 bar - 145 PSII
Hot water temperature:	max. 60 °C
Thermal disinfection:	70 °C / 4 min
The product is exclusively designed for drinking water!	

Symbol description

Do not use silicone containing acetic acid!

**Adjustment** (see page 7)

To adjust the hot water limiter. Using a hot water limiter in combination with a continuous flow water heater is not recommended.

**Maintenance** (see page 11)

The check valves must be checked regularly according to EN 806-5 in accordance with national or regional regulations (at least once a year).

**Dimensions** (see page 8)**Flow diagram** (see page 8)**Spare parts** (see page 9)

- 100 - Colors
- 00 - Chrome Plated
- 14 - Brushed Bronze
- 34 - Brushed Black Chrome
- 67 - Matt Black
- 70 - Matt White

**Cleaning** (see page 10)**Operation** (see page 11)

Hansgrohe recommends not to use as drinking water the first half liter of water drawn in the morning or after a prolonged period of non-use.

Fault	Cause	Remedy
Insufficient water	• Aerator calcified, dirty	• Clean aerator, replace as necessary
Mixer stiff	• Cartridge defective, calcified	• Exchange cartridge
Mixer dripping	• Cartridge defective	• Exchange cartridge
Water escaping in area of swivel spout	• O-ring defective	• Exchange O-ring
Water escaping at the threaded base	• connection hoses not completely screwed into basic body	• Tighten connection hoses by hand
	• O-ring at the connection hose defective.	• Exchange O-ring
Hot water temperature too low	• Hot water limiter incorrectly set	• Set hot water limiter

Sicherheitshinweise

- ⚠ Bei der Montage müssen zur Vermeidung von Quetsch- und Schnittverletzungen Handschuhe getragen werden.
- ⚠ Das Produkt darf nur zu Bade-, Hygiene- und Körperreinigungszwecken eingesetzt werden.
- ⚠ Große Druckunterschiede zwischen den Kalt- und Warmwasserschläuchen müssen ausgeglichen werden.

Montagehinweise

- Vor der Montage muss das Produkt auf Transportschäden untersucht werden. Nach dem Einbau werden keine Transport- oder Oberflächenschäden anerkannt.
- Die Leitungen und die Armatur müssen nach den gültigen Normen montiert, gespült und geprüft werden.
- Die in den Ländern jeweils gültigen Installationsrichtlinien sind einzuhalten.
- Das Ablaufventil darf nur in Waschbecken mit Überlauf eingesetzt werden.
- Das Ablaufventil darf nur zum bestimmungsgemäßen Gebrauch verwendet werden. Das Befestigen von anderen Gegenständen z. B. einer Halbsäule an dem Ablaufventil ist nicht zulässig.

Technische Daten

Betriebsdruck:	max. 1 MPa
Empfohlener Betriebsdruck:	0,1 - 0,5 MPa
Prüfdruck:	1,6 MPa
	11 MPa - 10 bar - 145 PSI
Heißwassertemperatur:	max. 60 °C
Thermische Desinfektion:	70 °C / 4 min
Das Produkt ist ausschließlich für Trinkwasser konzipiert!	

Symbolerklärung



Kein essigsäurehaltiges Silikon verwenden!



Justierung (siehe Seite 7)

Einstellen der Warmwasserbegrenzung. In Verbindung mit Durchlauferhitzer ist eine Warmwassersperre nicht zu empfehlen.



Wartung (siehe Seite 11)

Rückflussverhinderer müssen gemäß EN 806-5 regelmäßig in Übereinstimmung mit nationalen oder regionalen Bestimmungen auf ihre Funktion geprüft werden (mindestens einmal jährlich).



Maße (siehe Seite 8)



Durchflussdiagramm (siehe Seite 8)



Serviceteile (siehe Seite 9)

- XX - Farbcodierung
- 00 - Chrom
- 14 - Brushed Bronze
- 34 - Brushed Black Chrome
- 67 - Mattschwarz
- 70 - Mattweiß



Reinigung (siehe Seite 10)



Bedienung (siehe Seite 11)

Hansgrohe empfiehlt, morgens oder nach längeren Stagnationszeiten den ersten halben Liter nicht als Trinkwasser zu verwenden.







Störung






Ursache





Abhilfe

Wenig Wasser	• Luftspindler verkalzt, verschmutzt	• Luftspindler reinigen / austauschen
Armatur schwiegig	• Kartusche defekt, verkalzt	• Kartusche austauschen
Armatur tropft	• Kartusche defekt	• Kartusche austauschen
Wasseraustritt im Bereich des Schwenklaufes	• O-Ring defekt	• O-Ring austauschen
Wasseraustritt am Befestigungsschaft	• Anschlussschläuche nicht ganz in den Grundkörper eingeschraubt	• Anschlussschläuche von Hand festziehen
	• O-Ring am Anschlussschlauch defekt	• O-Ring austauschen
Zu niedrige Warmwassertemperatur	• Warmwasserbegrenzung falsch eingestellt	• Warmwasserbegrenzung einstellen



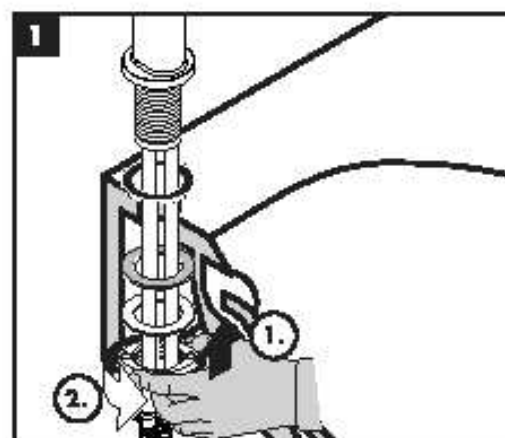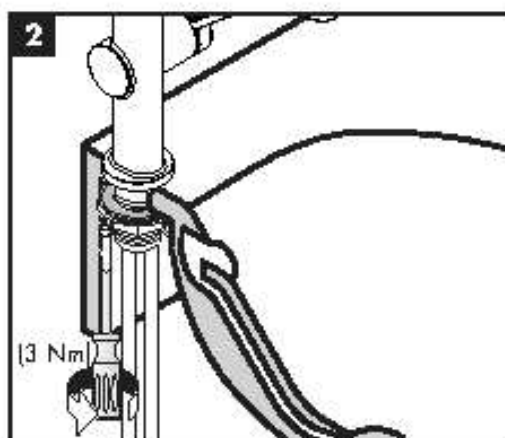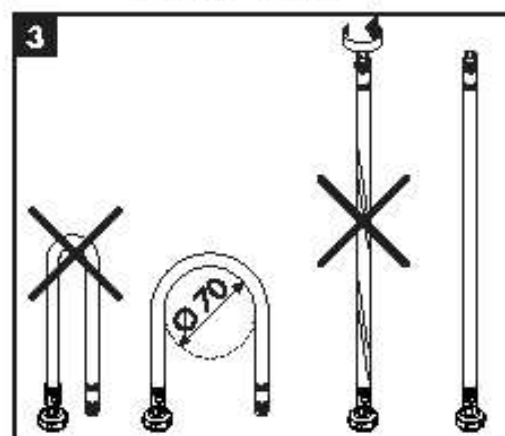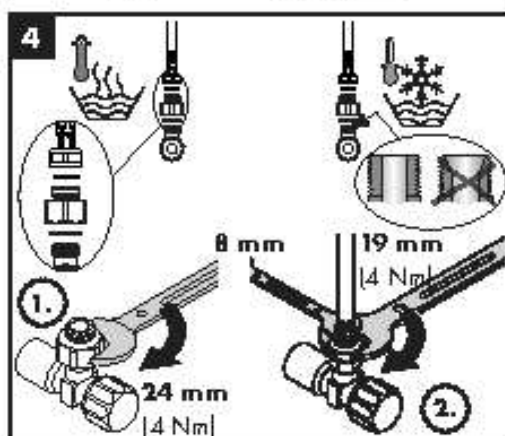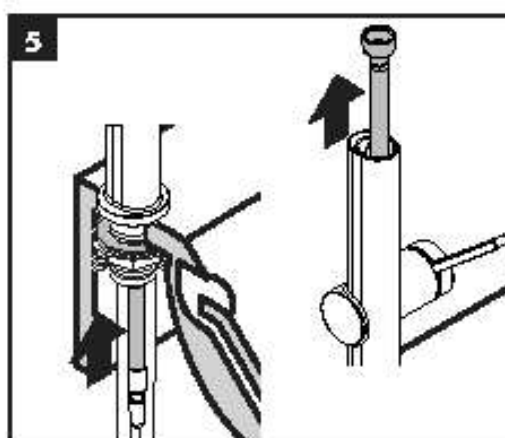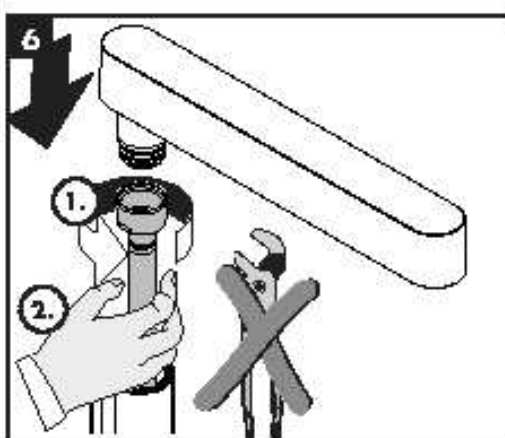

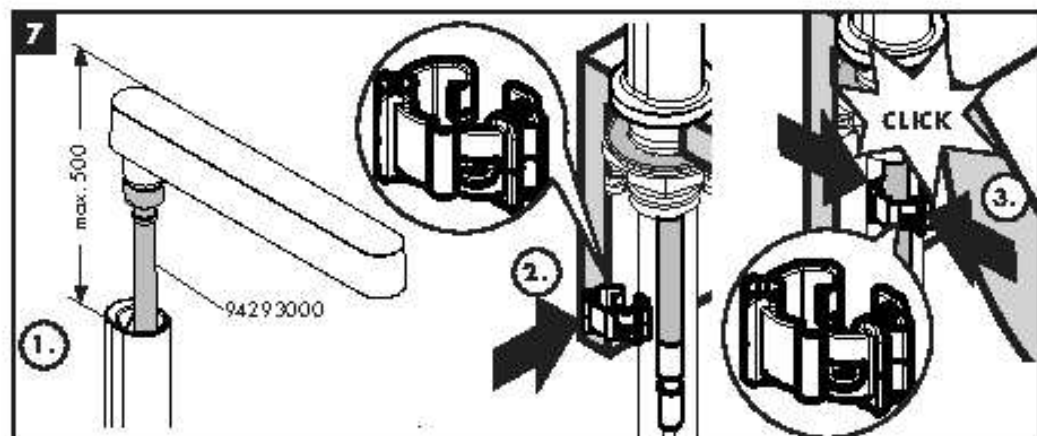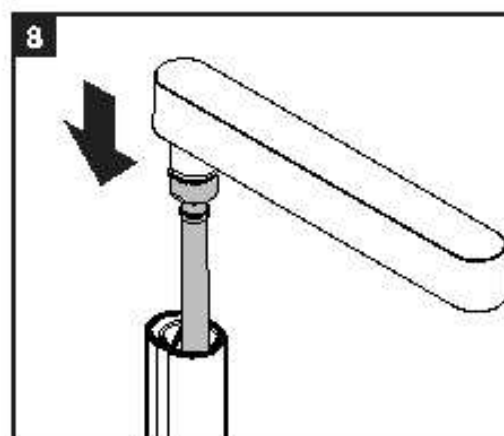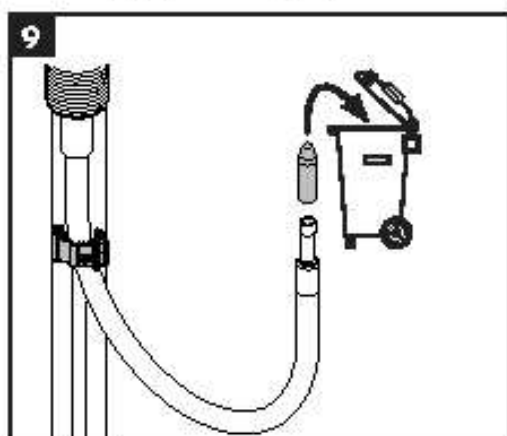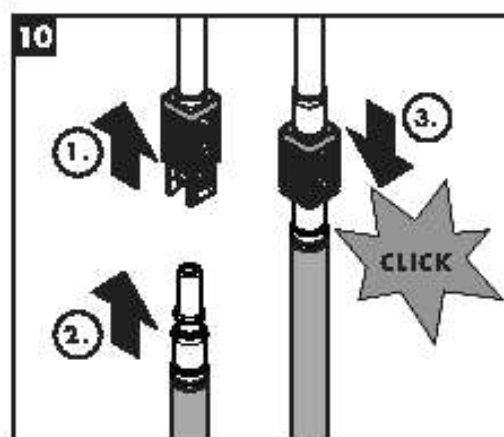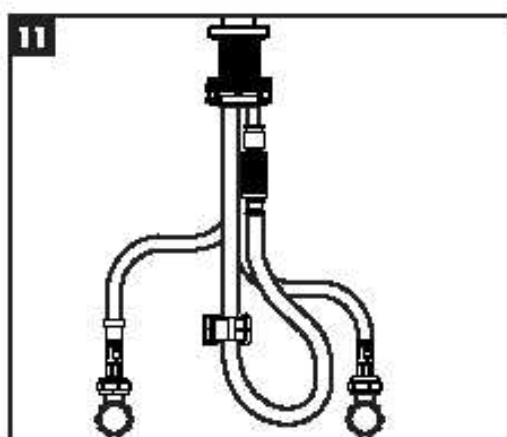

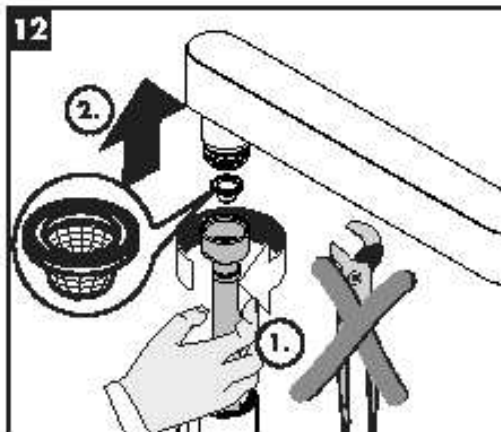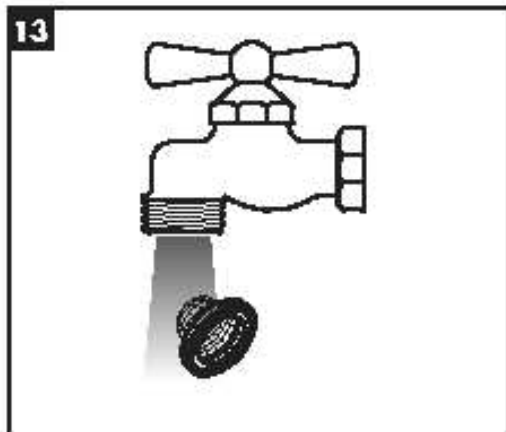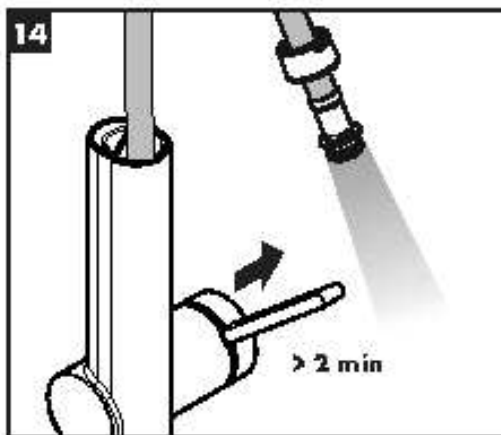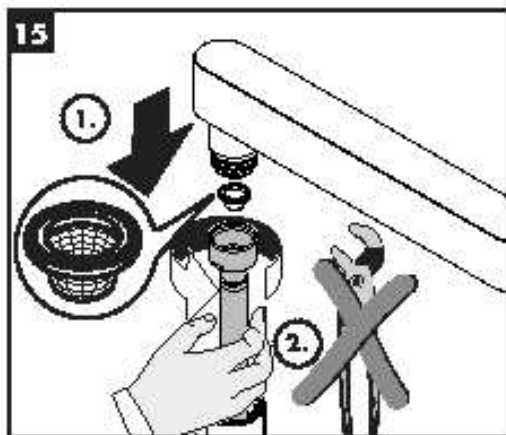









60 °C




10 °C



0,3 MPa

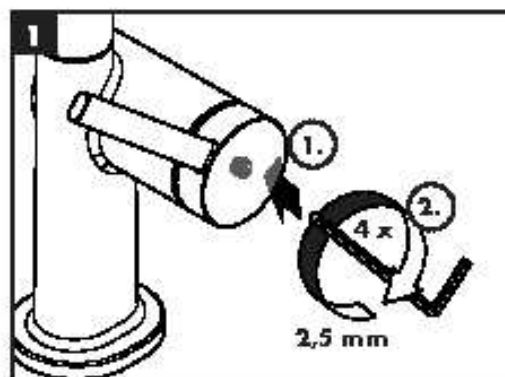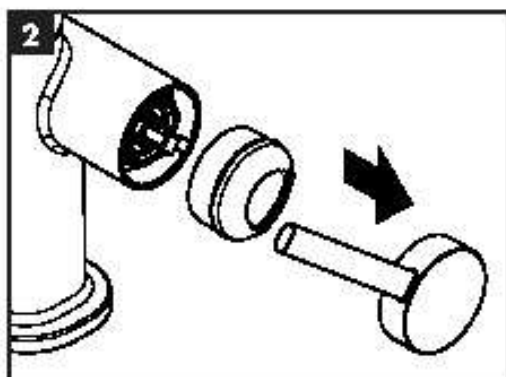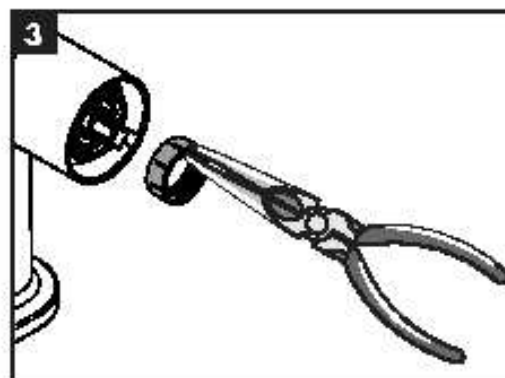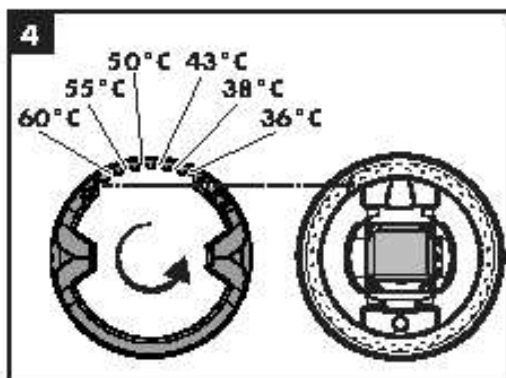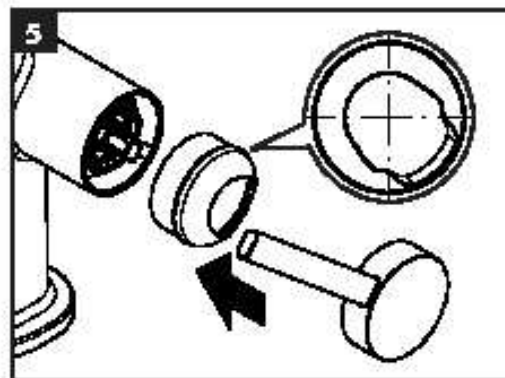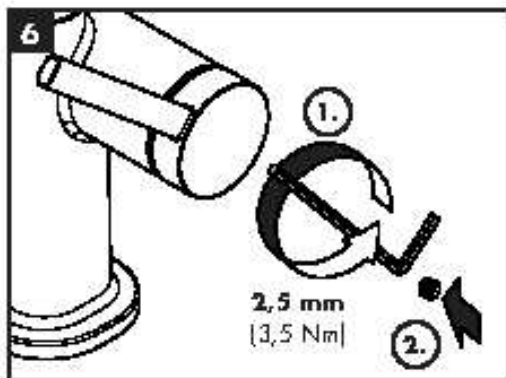

Finoris 230 2jet
76063XX3 / 76063XX9

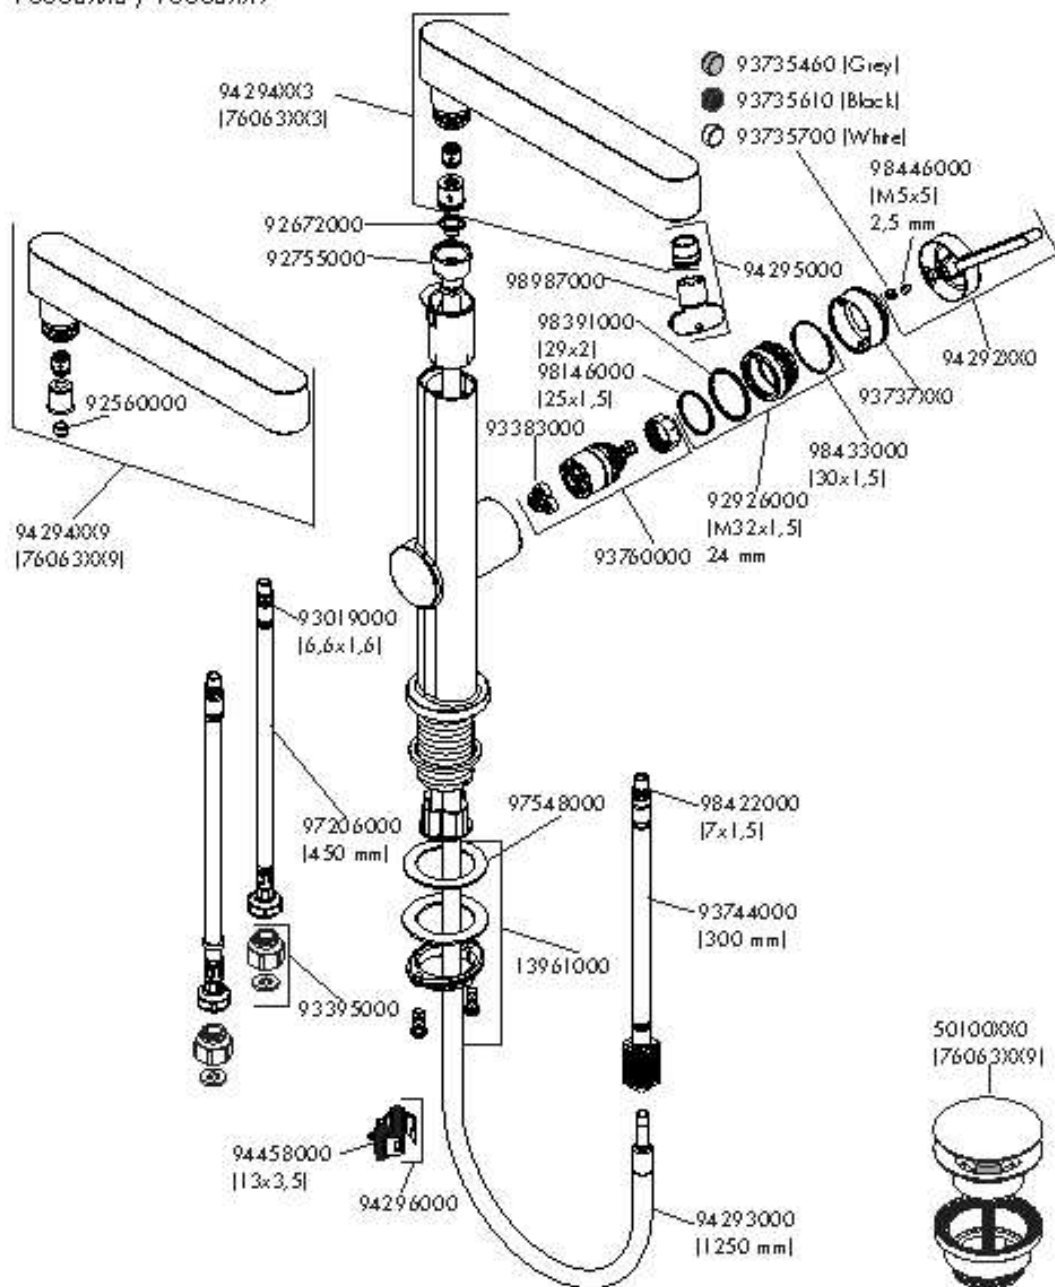



www.hansgrohe.com/cleaning-recommendation





www.hansgrohe.com/warranty











EN Cleaning recommendation / Warranty / Contact

DE Reinigungsempfehlung / Garantie / Kontakt

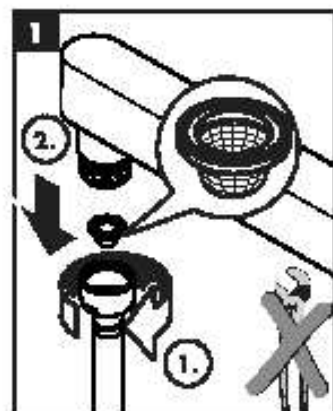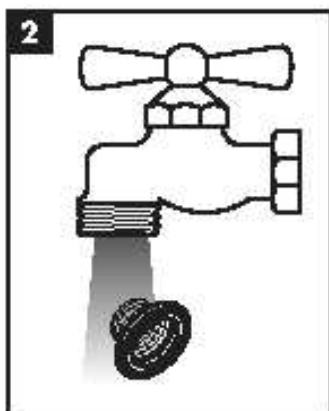


76063XX9

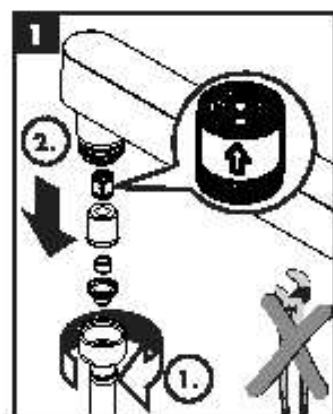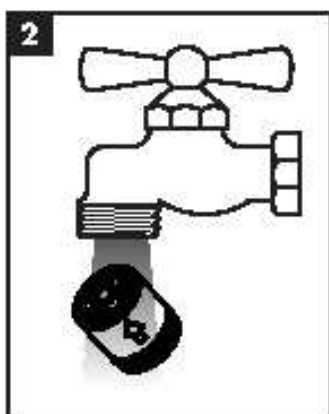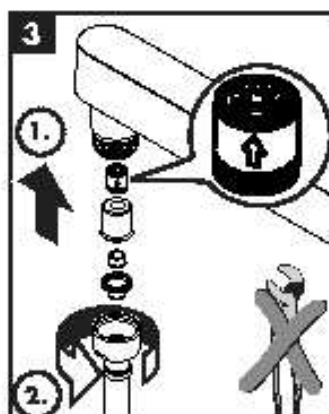


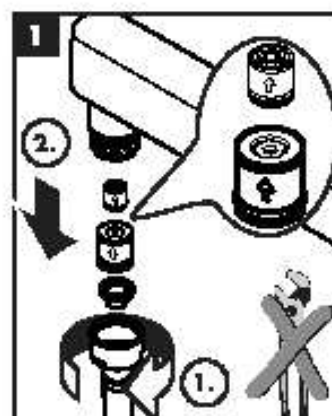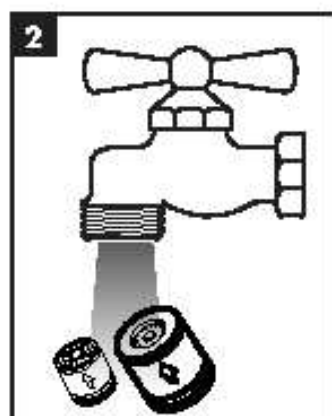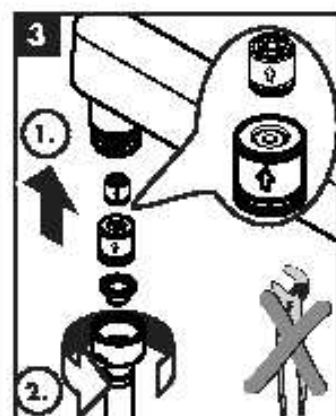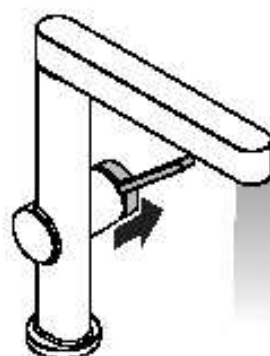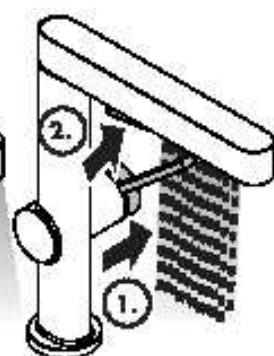


open / öffnen

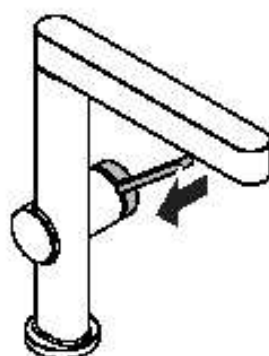

close / schließen

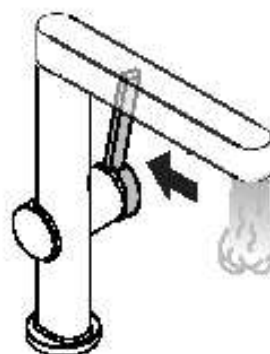

hot / warm

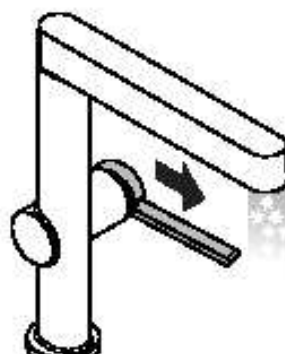

cold / kalt

