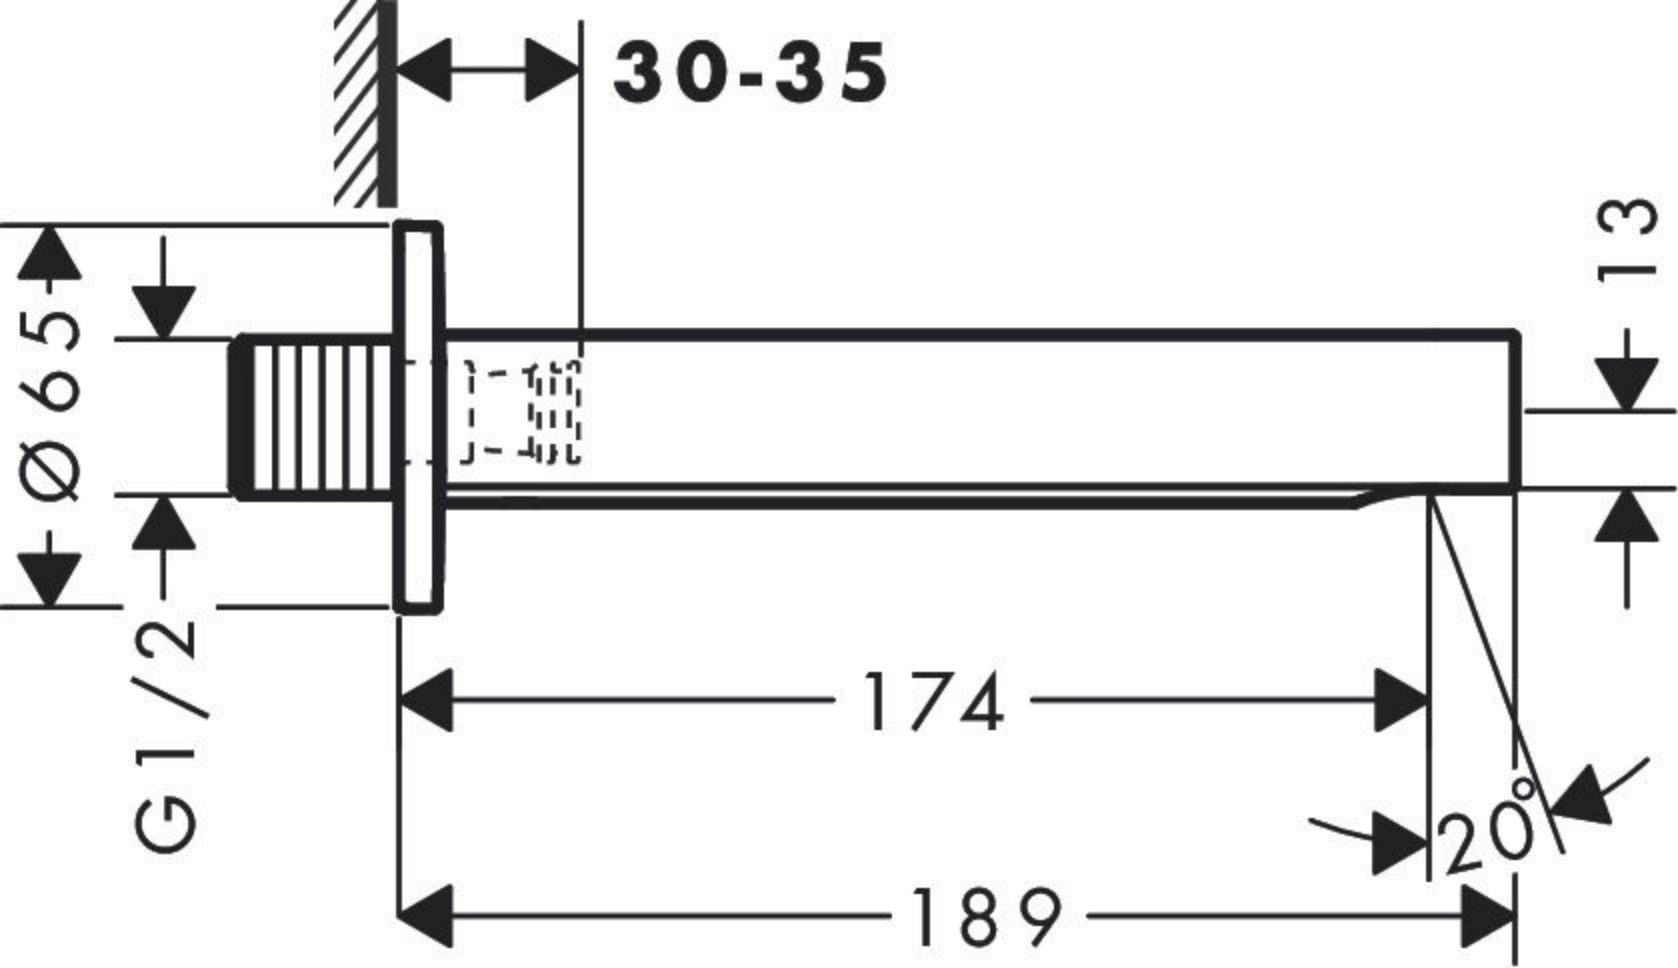
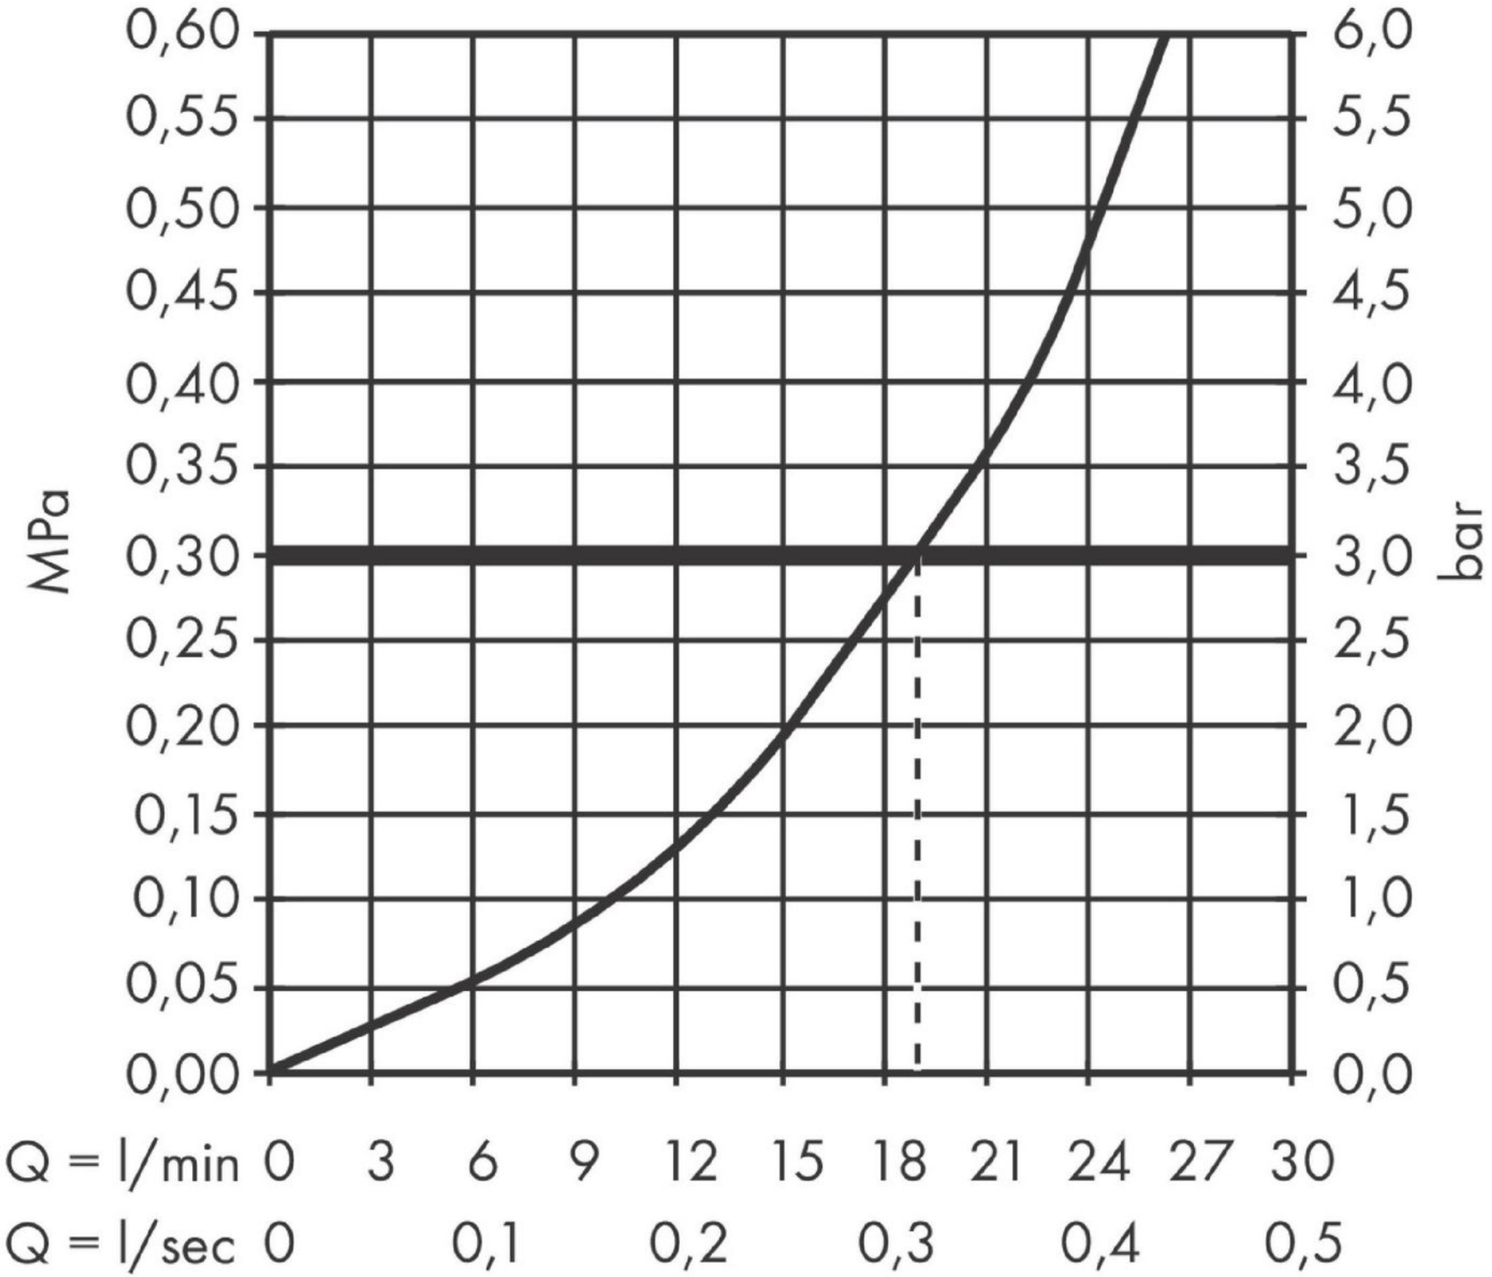

30-35
Ø65
G1/2
13
174
20°
189



The consumption was measured in combination with the appropriate fittings (thermostat/mixer/ in-wall valve) to reflect actual application in practice.