

EN Instructions for use / Assembly instructions

DE Gebrauchsanleitung / Montageanleitung

2

3



Matris
31456003



Matris
31685003



Dacor
31965XX3



Matropol
32565003



MySport
71269000



Logis
71605003



Talis E
71765XX3



Talis S
72605003




Rabris S
72667XX3



Rabris E
72668XX3



Taris
72669XX3




Matropol
74565003



Zasis S
74616XX3



Vivaris
75615XX3



Finoris
76615XX3

**Safety Notes**

- ⚠️ Gloves should be worn during installation to prevent crushing and cutting injuries.
- ⚠️ The product may only be used for bathing, hygienic and body cleaning purposes.
- ⚠️ The hot and cold supplies must be of equal pressures.

Installation Instructions

- Prior to installation, inspect the product for transport damages. After it has been installed, no transport or surface damage will be honoured.
- The pipes and the fixture must be installed, flushed and tested as per the applicable standards.
- The plumbing codes applicable in the respective countries must be observed.

Technical Data

Operating pressure:	max. 1 MPa
Recommended operating pressure:	0,1 - 0,5 MPa
Test pressure:	1,6 MPa 11 MPa - 10 bar - 145 PSI
Hot water temperature:	max. 60 °C
Thermal disinfection:	70 °C / 4 min
The product is exclusively designed for drinking water!	

Symbol description

Do not use silicone containing acetic acid!

**Adjustment** (see page 8)

To adjust the hot water limiter. Using a hot water limiter in combination with a continuous flow water heater is not recommended.

**Dimensions** (see page 4)**Flow diagram** (see page 5)

free flow

**Spare parts** (see page 9)

- 30X - Colors
- 00 - Chrome Plated
- 14 - Brushed Bronze
- 34 - Brushed Black Chrome
- 67 - Matt Black
- 70 - Matt White
- 82 - Brushed Nickel
- 99 - Polished Gold-Optic

**Special accessories** (see page 11)

order as an extra

- extension 25 mm #13595000
- Extension Set 22 mm (when wall is not deep enough) #13597000, #13593000, #15597000

**Cleaning** (see page 12)**Operation** (see page 4)

Fault	Cause	Remedy
Mixer not fl.	• Cartridge defective, calcified	• Exchange cartridge
Mixer dripping	• Cartridge defective	• Exchange cartridge
Hot water temperature too low, no cold water. Instantaneous water heater starts up when cold water is selected.	• Hot water limiter incorrectly set • Crossflow	• Set hot water limiter • Exchange cartridge

Sicherheitshinweise

- ⚠ Bei der Montage müssen zur Vermeidung von Quetsch- und Schnittverletzungen Handschuhe getragen werden.
- ⚠ Das Produkt darf nur zu Bade-, Hygiene- und Körperreinigungszwecken eingesetzt werden.
- ⚠ Große Druckunterschiede zwischen den Kalt- und Warmwasserschläüssen müssen ausgeglichen werden.

Montagehinweise

- Vor der Montage muss das Produkt auf Transportschäden untersucht werden. Nach dem Einbau werden keine Transport- oder Oberflächenschäden anerkannt.
- Die Leitungen und die Armatur müssen nach den gültigen Normen montiert, gespült und geprüft werden.
- Die in den Ländern jeweils gültigen Installationsrichtlinien sind einzuhalten.

Technische Daten

Betriebsdruck:	max. 1 MPa
Empfohlener Betriebsdruck:	0,1 - 0,5 MPa
Prüfdruck:	1,6 MPa
	[1 MPa = 10 bar = 145 PSI]
Heißwassertemperatur:	max. 60 °C
Thermische Desinfektion:	70 °C / 4 min
Das Produkt ist ausschließlich für Trinkwasser konzipiert!	

Symbolerklärung



Kein essigsäurehaltiges Silikon verwenden!



Justierung (siehe Seite 8)

Einstellen der Warmwasserbegrenzung. In Verbindung mit Durchlauferhitzer ist eine Warmwassersperre nicht zu empfehlen.



Maße (siehe Seite 4)



Durchflussdiagramm (siehe Seite 5)
hier: Durchfluss



Serviceteile (siehe Seite 9)

- XX - Farbcodierung
- 00 - Chrom
- 14 - Brushed Bronze
- 34 - Brushed Black Chrome
- 67 - Mattschwarz
- 70 - Mattweiß
- 82 - Brushed Nickel
- 99 - Polished Gold-Optic



Sonderzubehör (siehe Seite 11)
nicht im Lieferumfang enthalten

- Verlängerung 25 mm #13595000
- Verlängerung 22 mm (bei geringer Einbautiefe) #13597000, #13593000, #15597000



Reinigung (siehe Seite 12)



Bedienung (siehe Seite 4)

Störung


Ursache

Abhilfe


Armatur schweißgängig	• Kartusche defekt, verkalkt	• Kartusche austauschen
Armatur tropft	• Kartusche defekt	• Kartusche austauschen
Zu niedrige Warmwassertemperatur, kein Kaltwasser, Durchlauferhitzer springt an, wenn Kaltwasser angewählt wird.	• Warmwasserbegrenzung falsch eingestellt • Kreuzfluss	• Warmwasserbegrenzung einstellen • Kartusche austauschen




Matris
31456003




Matris
31685003




Dacor
31965XX3




Metropol
32565XX3 / 74565003




MySport
71269000




Logis
71605003




Talis E
71765XX3




Talis S
72605XX3




Rabris S
72667XX3




Rabris E
72668XX3




Taris
72669XX3




Vivanis
75615XX3




Zasis S
74616XX3



Finoris
76615XX3




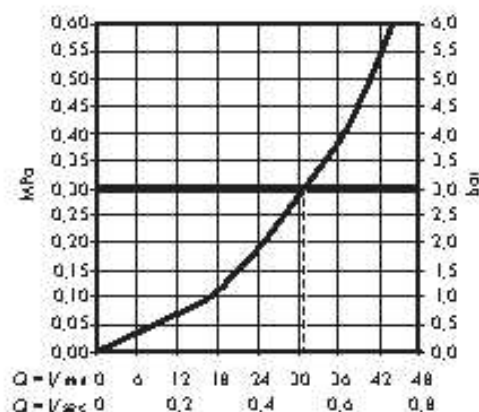


open / öffnen









close / schließen






hot / warm





cold / kalt

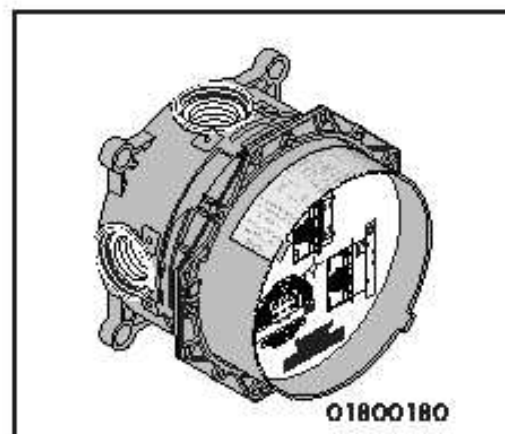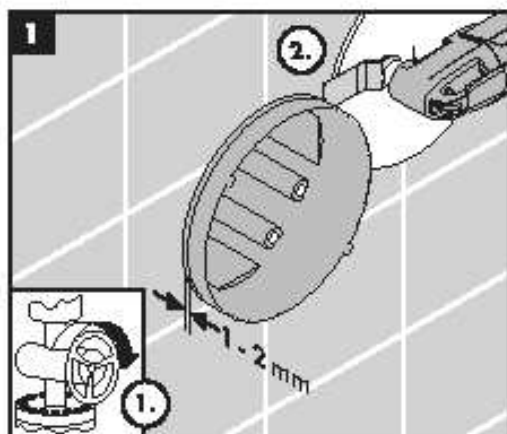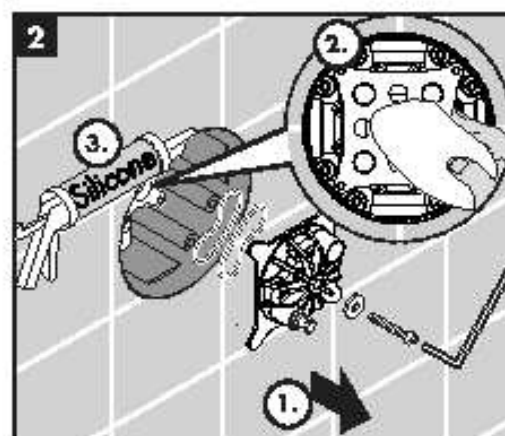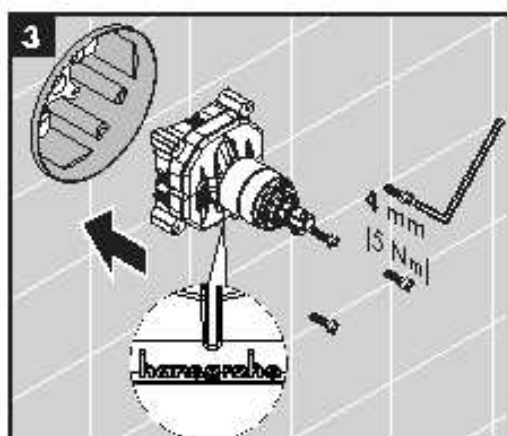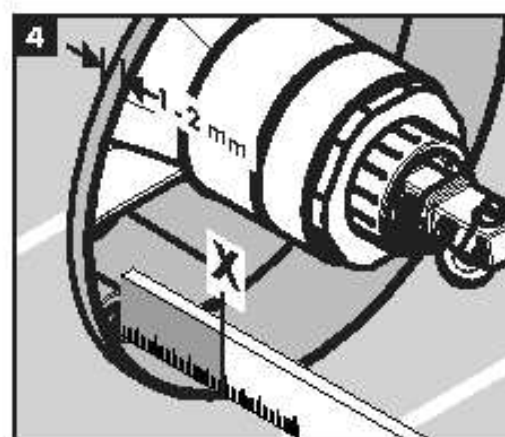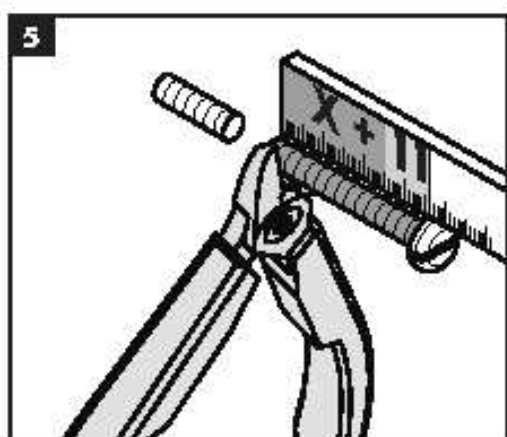

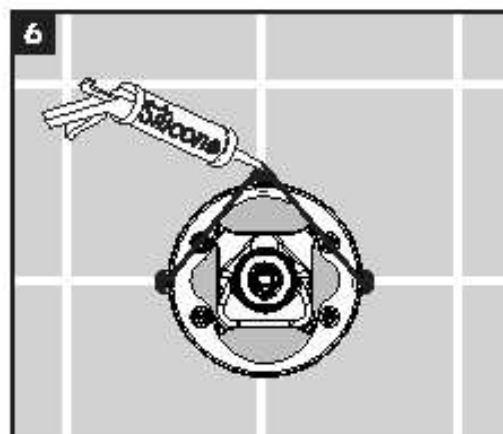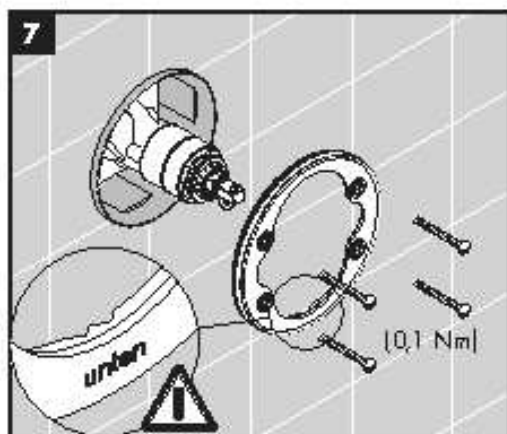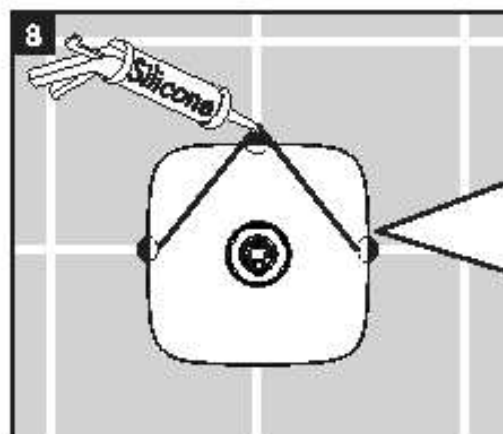

Matris	31456003
Matropol	32565XX3 / 74565003
Logis	71605003
Talis E	71765XX3
Vivanis	75615XX3
Finoris	76615XX3

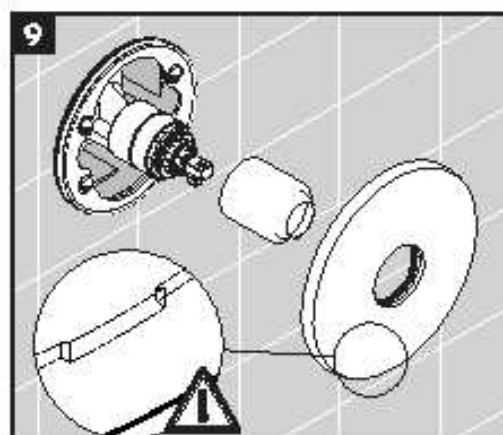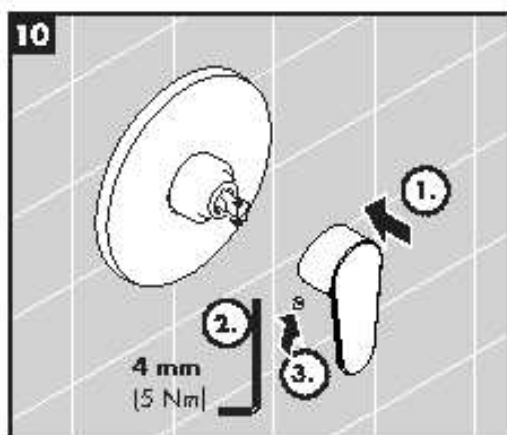








60 °C



10 °C



0,3 MPa

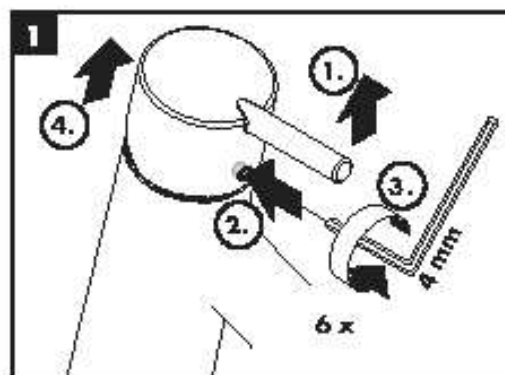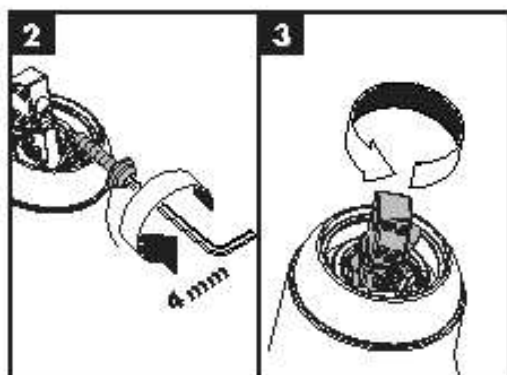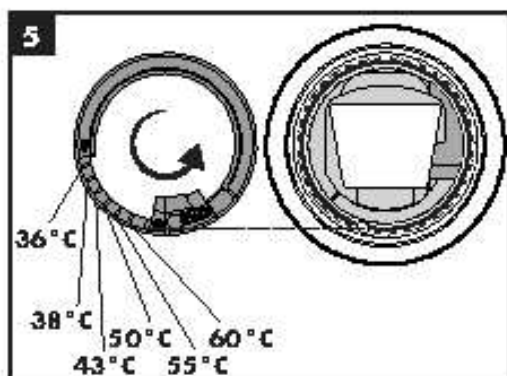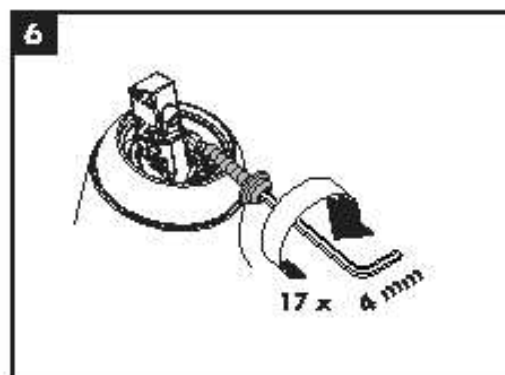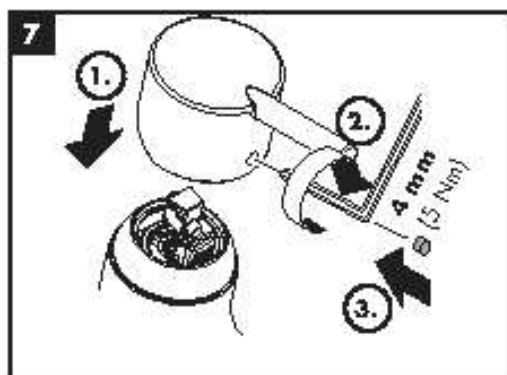

Matris
31685003

Decor
31965XX3

MySport
71269000


Talis S
72605XX3

Rebris S
72667XX3

Talis
72669XX3

Rebris E
72668XX3

Zesis S
74616XX3

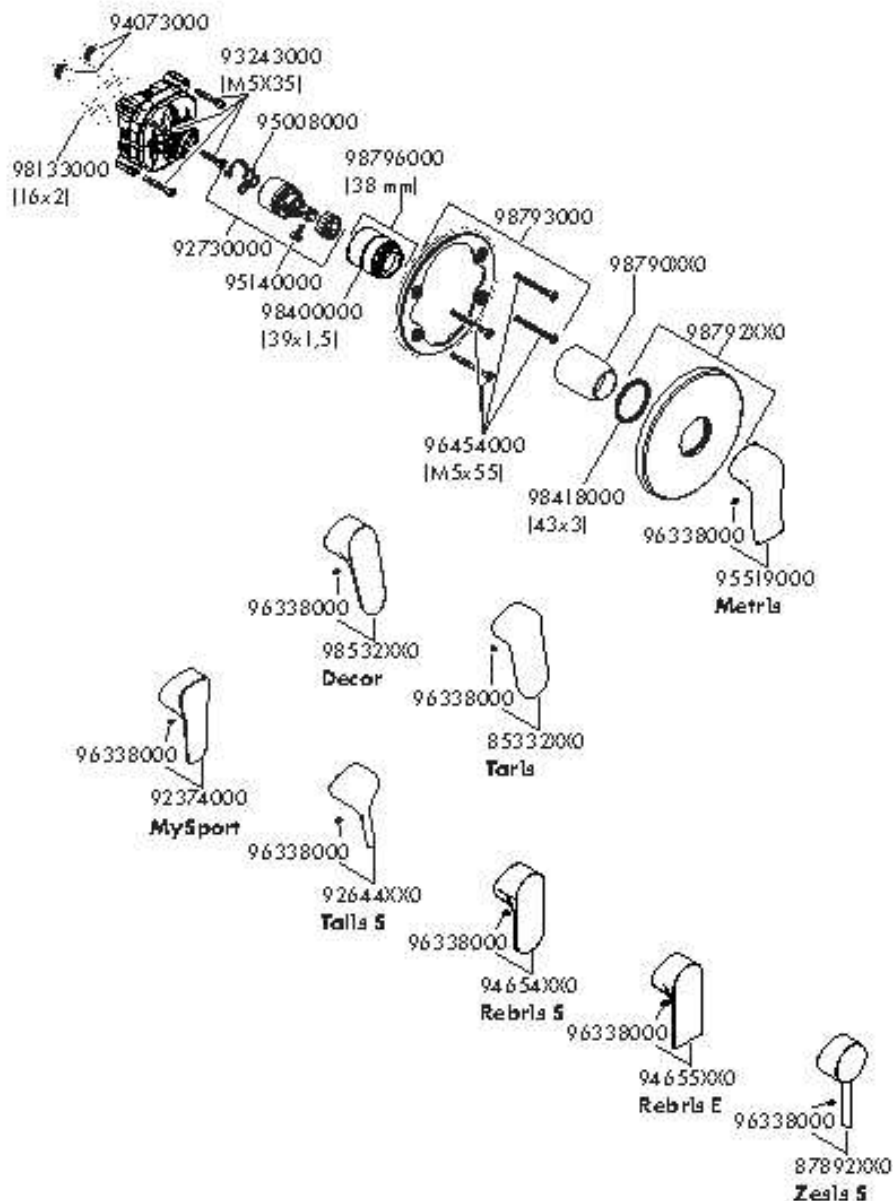



Matrís


31456003

Logis

71605003

Total E


71765XX3

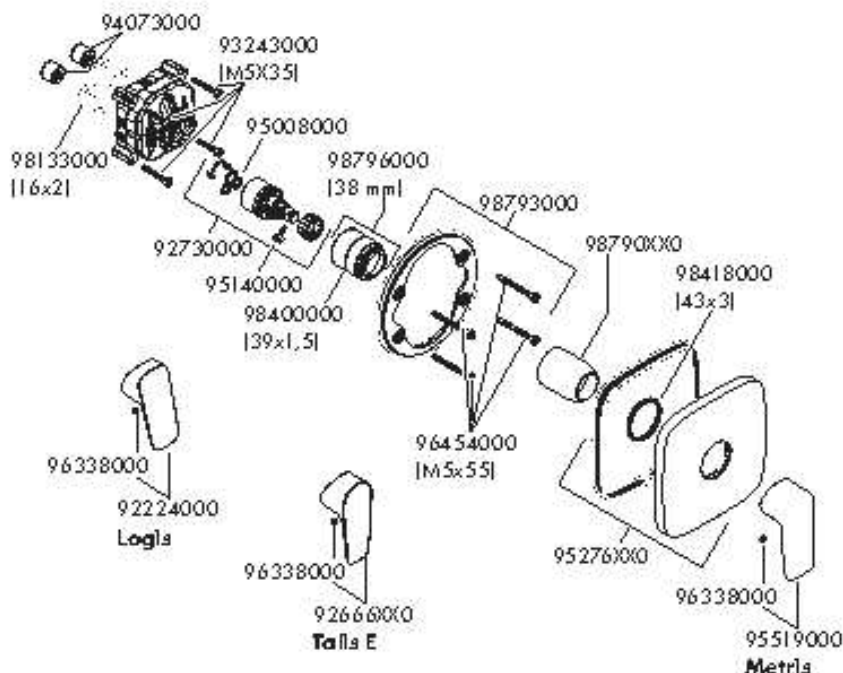


Metropol

32565XX3


74565003

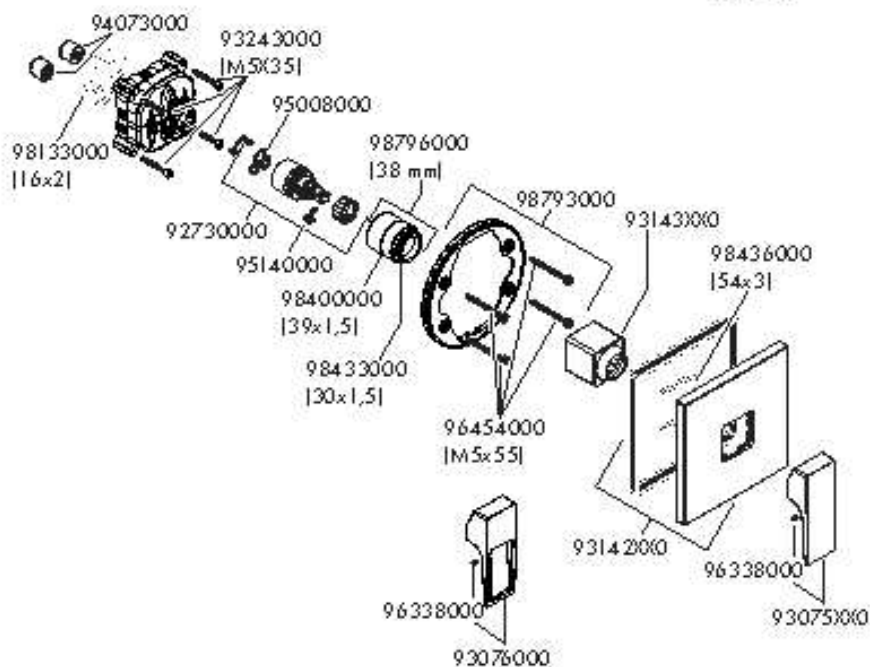


Vivanis
75615XX3
Finoris
76615XX3

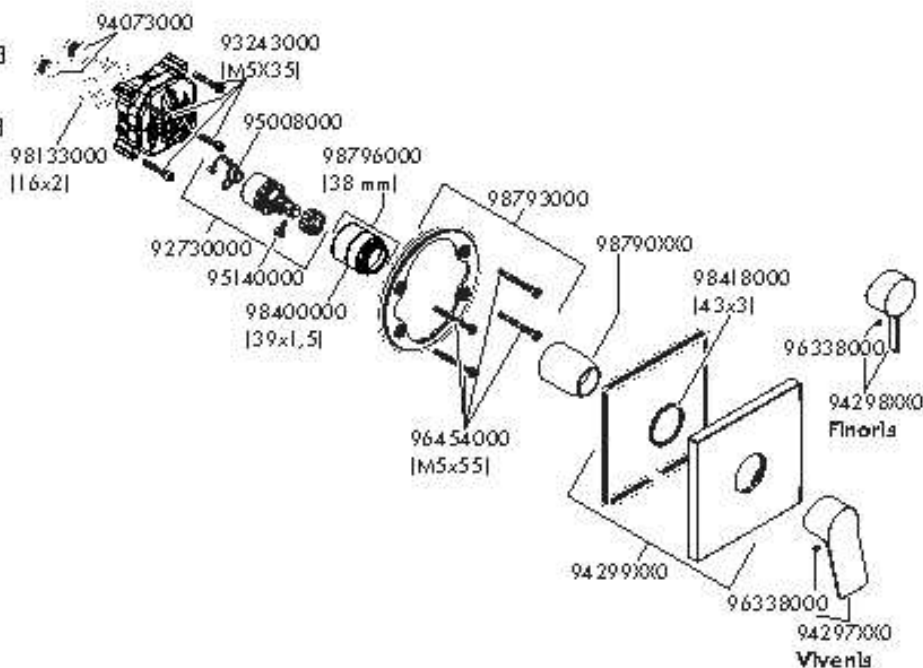

Ecos 14630000
MySport 71269000
Matris S 31665XX3
Talis S 72605XX3
Matris 31685003
Rabris S 72667XX3
Dacor 31965XX3
Rabris E 72668XX3
31965223





Metropol 32565XX3
74565003
Vivanis 75615XX3
Finoris 76615XX3



Novus 71065003
Zasis S 74616XX3

Matris 31456003
Logis 71605003
Talis E 71765XX3





www.hansgrohe.com/cleaning-recommendation



EN Cleaning recommendation / Warranty / Contact

DE Reinigungsempfehlung / Garantie / Kontakt